


Packaging: 1-Tape 0-Tube



Terminal Contact:Brass ,Gold- Plated

100mΩ Max(After Life Text)


Storage Temperature: -40°C to $+85^{\circ}\text{C}$



KL57-KMR

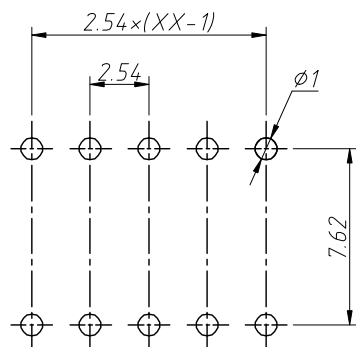

PCB Layout



SCHEMATIC(TYP.)

Recommended Solder Temperature at 260°C Max, 5 seconds for IC type

KLS P/N:	L-KLS7-KMR-XX-N-XX	
2025-09-26		NingBo KLS ELECTRONIC CO.,LTD.
2025-09-26		