



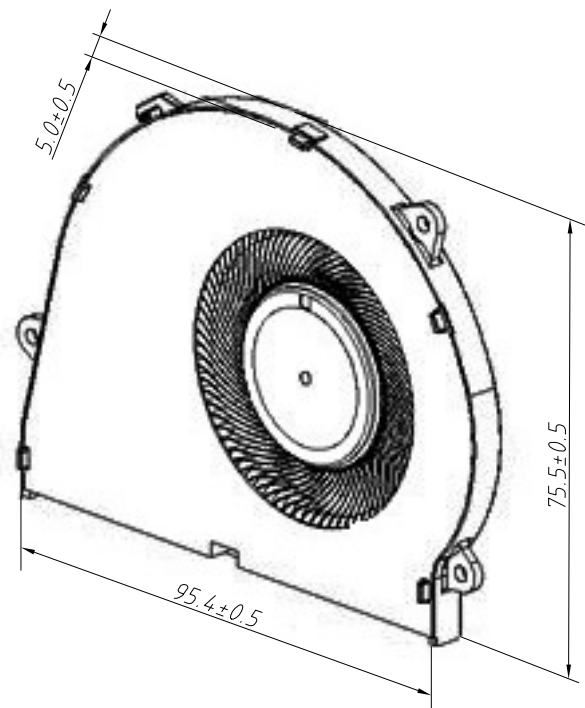

P&Q Curve (Under Rated Voltage)

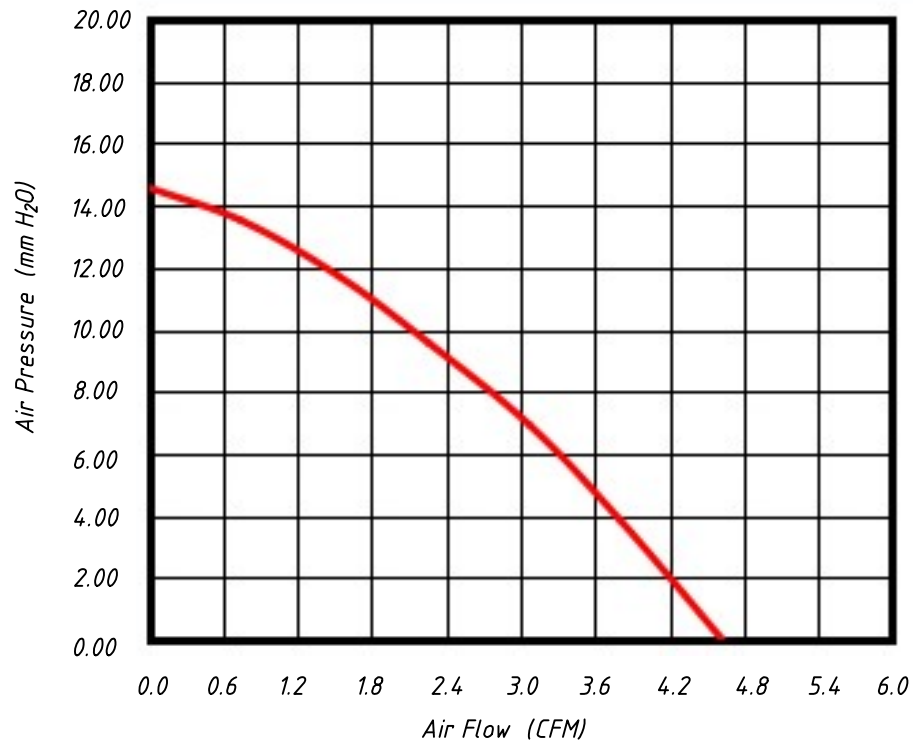

Bearing TYPE	Rated Voltage	Operating Voltage	Rated Current	Rated Inputpower	Speed	Maximum Air Flow		Maximum Air Pressure		Noise	Distance
	V DC	V DC	A MP	WATT	RPM	M ³ /Min	CFM	mm H ₂ O	IN H ₂ O	dB (A)	m
HDB	5	3.5~5.5	0.45	2.25	4500	0.13	4.63	14.52	0.566	40.9	0.5

Material
Housing:Plastic, UL94V-0

Electric:
Insulation Impedance:10M Ω /DC 250V Min
Voltage Withstand Test:AC 500V 1s

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				DC Fans	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS22-LX-9505-LHD05
.x ±0.30		SHEET SIZE		A4	
.xx ±0.20		Draw:		WuHao 2025-04-02	
.xxx ±0.10		Check:		Daniel 2025-04-02	
 NingBo KLS ELECTRONIC CO.,LTD.					