



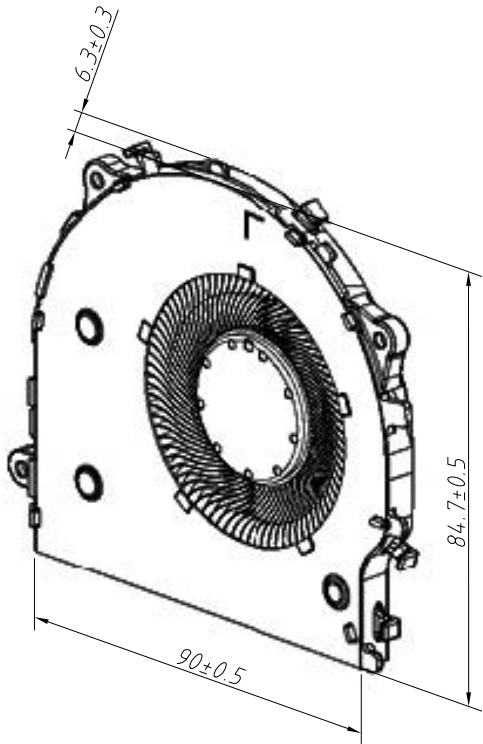

P&Q Curve (Under Rated Voltage)

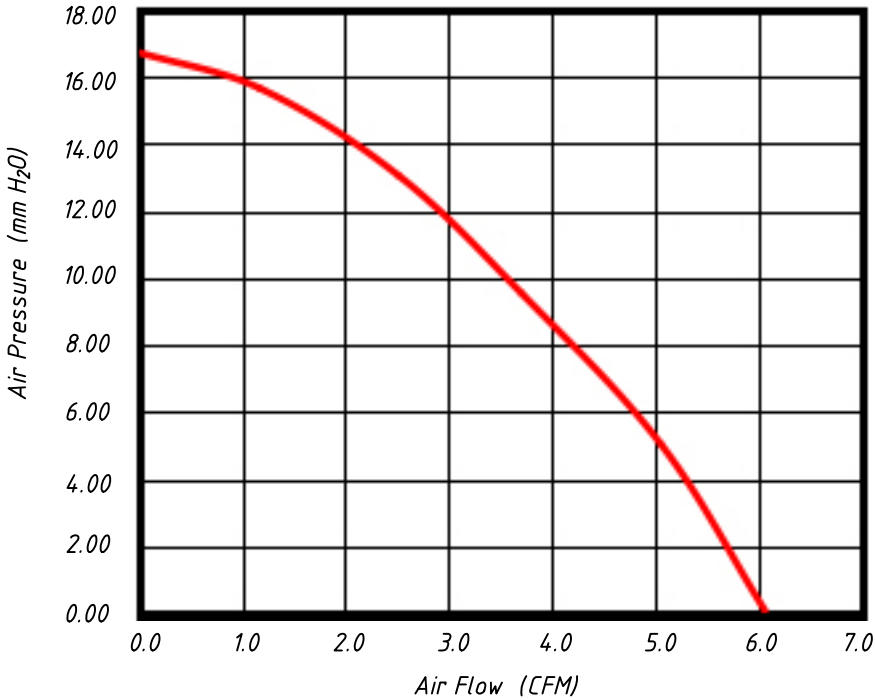

Bearing TYPE	Rated Voltage	Operating Voltage	Rated Current	Rated Inputpower	Speed	Maximum Air Flow		Maximum Air Pressure		Noise	Distance
	V DC	V DC	A MP	WATT	RPM	M ³ /Min	CFM	mm H ₂ O	IN H ₂ O	dB (A)	m
HDB	5	3.5~5.5	0.45	2.25	3800	0.169	6.05	16.74	0.653	39.7	0.5

Material
Housing:Plastic, UL 94V-0

Electric:
Insulation Impedance:10MΩ /DC 250V Min
Voltage Withstand Test:AC 500V 1s

ANGLE TOLERANCE		PROJECTION	Description:			
±3°			DC Fans			
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS22-LX-9006-LHD05	
.x	±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,LTD.	
.xx	±0.20	Draw:	WuHao			
.xxx	±0.10	Check:	Daniel			