



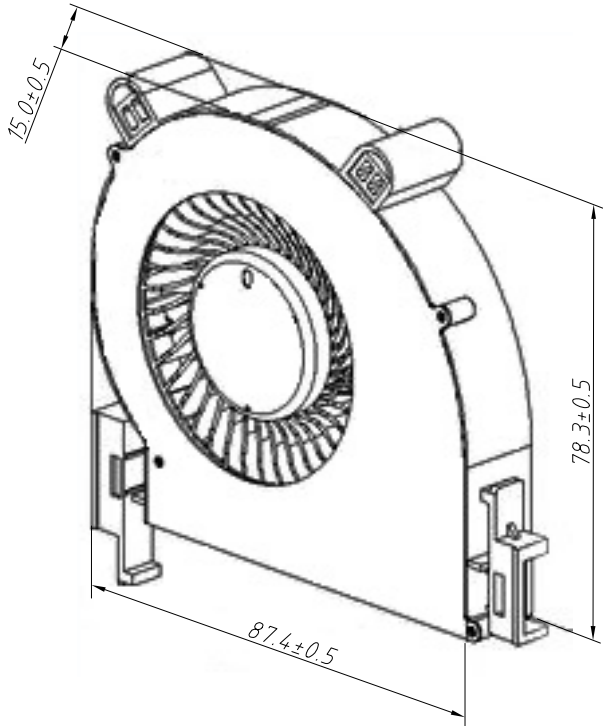

P&Q Curve (Under Rated Voltage)

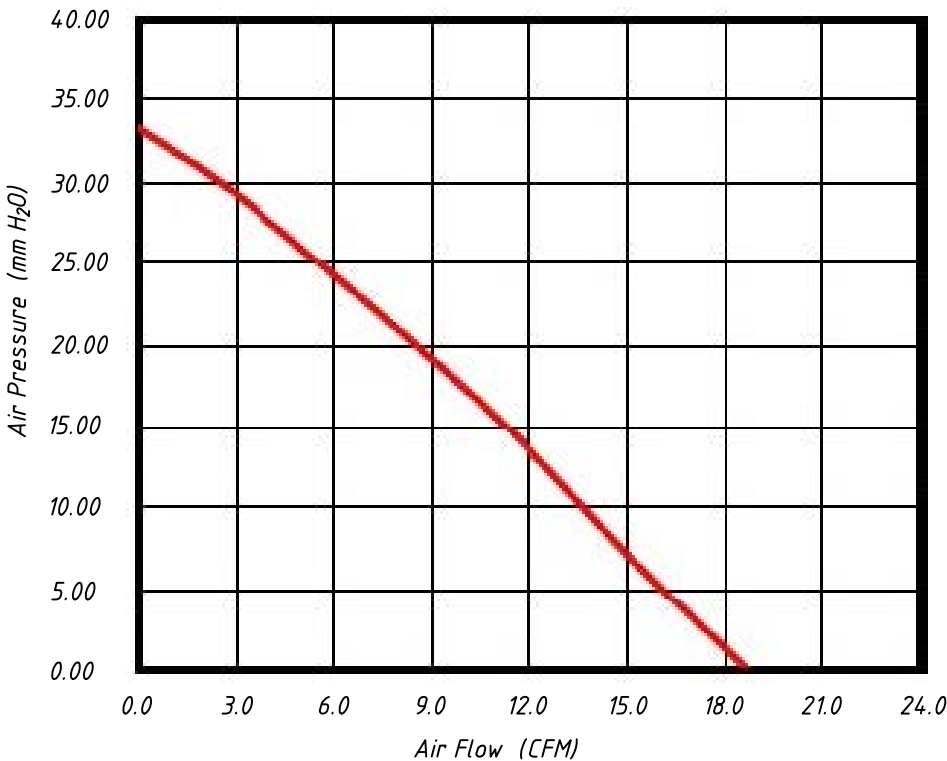

Bearing TYPE	Rated Voltage	Operating Voltage	Rated Current	Rated Inputpower	Speed	Maximum Air Flow		Maximum Air Pressure		Noise	Distance
	V DC	V DC	A MP	WATT	RPM	M ³ /Min	CFM	mm H ₂ O	IN H ₂ O	dB (A)	m
HDB	12	10.8~13.2	0.55	6.6	4600	0.522	18.66	33.3	1.299	52.3	0.5

Material
Housing:Plastic, UL94V-0

Electric:
Insulation Impedance:10MΩ /DC 250V Min
Voltage Withstand Test:AC 500V 1s

ANGLE TOLERANCE		PROJECTION	Description:	
±3°			DC Fans	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:
.x ±0.30		SHEET SIZE		A4
.xx ±0.20		Draw:	WuHao	2025-04-11
.xxx ±0.10		Check:	Daniel	2025-04-11
				L-KLS22-LX-9015-LHD12
NingBo KLS ELECTRONIC CO.,LTD.				