


1		2		3		4		5		6		7		8					
RoHS Compliance														REV	SYM	Revision Record		Appr.	Date
														V0	KLS19047	New Version Release		WuHao	2025-04-09

27.5±0.5

28.9±0.5

55.8±0.5

57.6±0.5

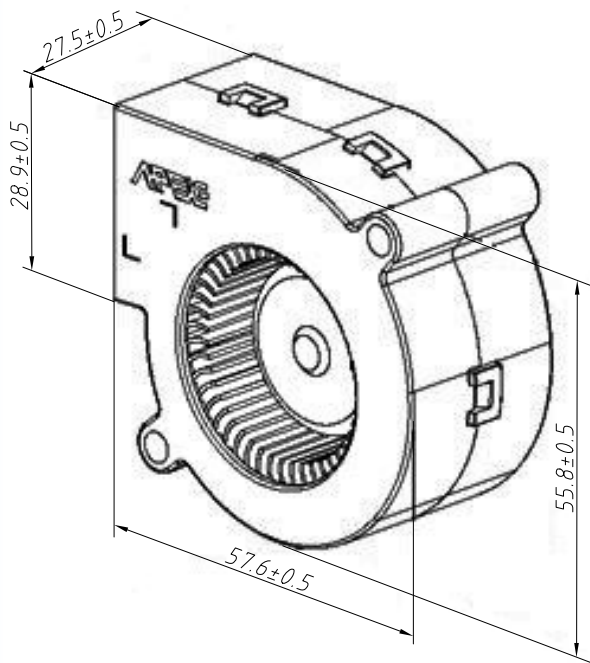

30.00

28.00

26.00

24.00

22.00

20.00

18.00

16.00

14.00

12.00

10.00

8.00

6.00

4.00

2.00

0.00

0.0

1.5

3.0

4.5

6.0

7.5


9.0

10.5

12.0

Air Pressure (mm H₂O)

Air Flow (CFM)

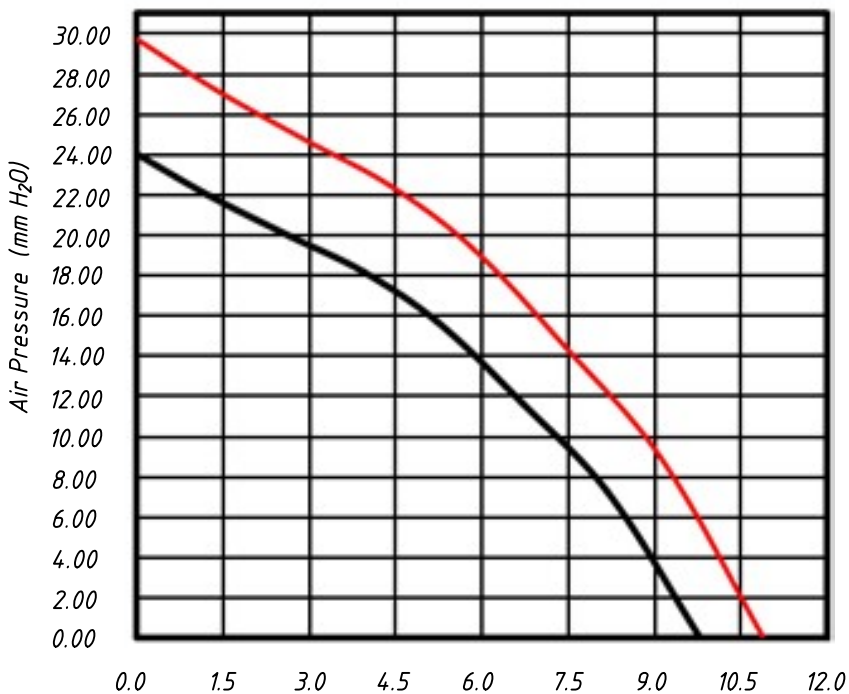

Model	Bearing TYPE	Rated Voltage	Operating Voltage	Rated Current	Rated Inputpower	Speed	Maximum Air Flow		Maximum Air Pressure		Noise	Distance
		V DC	V DC	A MP	WATT	RPM	M ³ /Min	CFM	mm H ₂ O	IN H ₂ O	dB (A)	m
L-KLS22-LX-F5727-LBD12A	BB	12	10.8~13.2	0.4	4.8	5000	0.274	9.79	24.02	0.937	41.2	1
L-KLS22-LX-F5727-LBD12B	BB	12	10.8~13.2	0.5	6.4	5500	0.305	10.89	29.73	1.159	43.3	1

Material

Housing:Plastic, UL 94V-0

Electric:

Insulation Impedance:10MΩ /DC 250V Min

Voltage Withstand Test:AC 500V 1s

ANGLE TOLERANCE	PROJECTION	Description:
±3°		DC Fans
GENERAL TOLERANCE	UNITS	mm
.x ±0.30	SHEET SIZE	A4
.xx ±0.20	Draw:	WuHao
.xxx ±0.10	Check:	Daniel

KLS

electronics

NingBo KLS ELECTRONIC CO.,L TD.

L-KLS22-LX-F5727-LBD12X