


P&Q Curve (Under Rated Voltage)

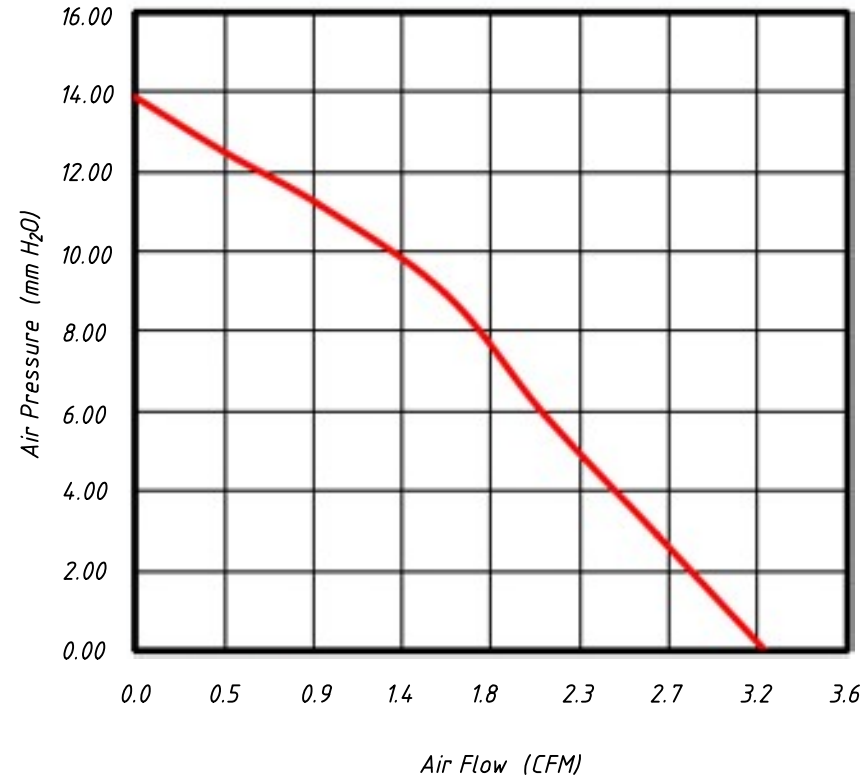

Bearing TYPE	Rated Voltage	Operating Voltage	Rated Current	Rated Inputpower	Speed	Maximum Air Flow		Maximum Air Pressure		Noise	Distance
	V DC	V DC	A MP	WATT	RPM	M ³ /Min	CFM	mm H ₂ O	IN H ₂ O	dB (A)	m
HDB	5	3.5~5.5	0.40	2.00	5600	0.090	3.19	13.85	0.545	37.2	0.5

Material
Housing: Plastic, UL 94 V-0

Electric:
Insulation Impedance: 10M Ω /DC 250V Min
Voltage Withstand Test: AC 500V 1s

ANGLE TOLERANCE	PROJECTION	Description:
±3°		DC Fans
GENERAL TOLERANCE	UNITS	mm
.x ±0.30	SHEET SIZE	A4
.xx ±0.20	Draw:	WuHao 2025-04-07
.xxx ±0.10	Check:	Daniel 2025-04-07
KLS		NingBo KLS ELECTRONIC CO.,LTD.

