



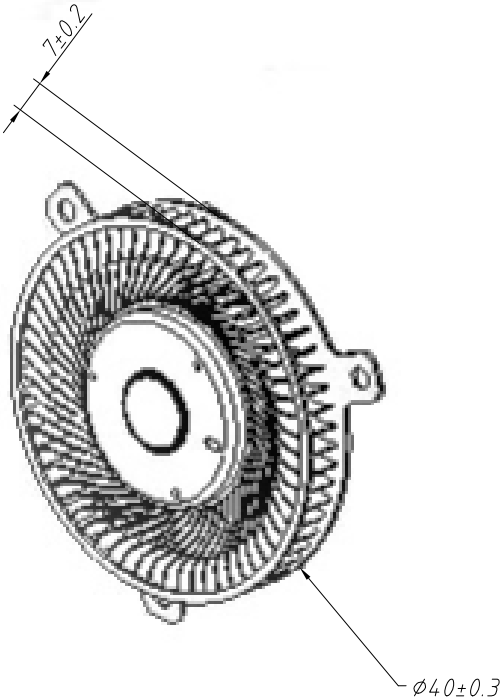

P&Q Curve (Under Rated Voltage)

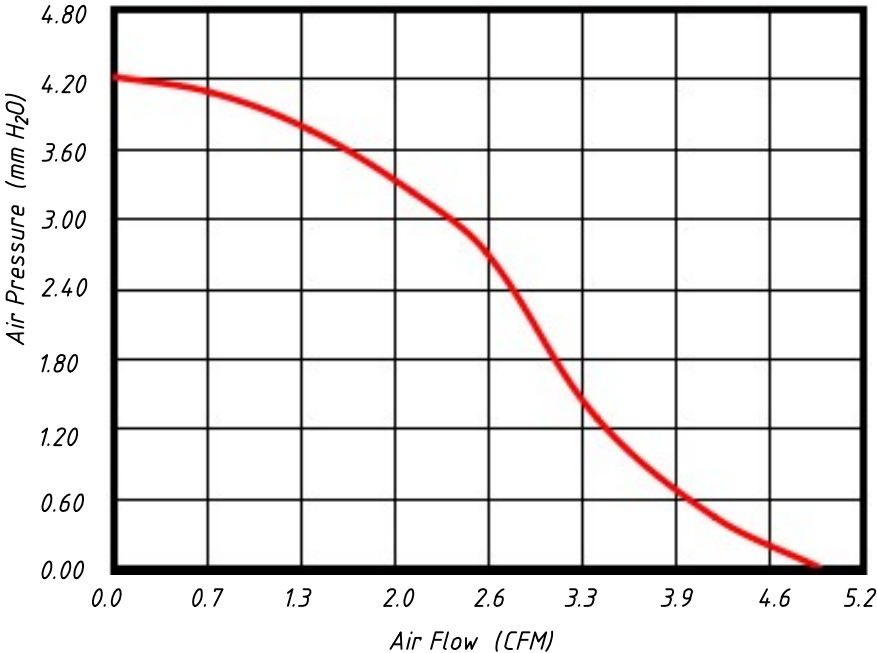

Bearing TYPE	Rated Voltage	Operating Voltage	Rated Current	Rated Inputpower	Speed	Maximum Air Flow		Maximum Air Pressure		Noise	Distance
	V DC	V DC	A MP	WATT	RPM	M ³ /Min	CFM	mm H ₂ O	IN H ₂ O	dB (A)	m
HDB	5	2.5~5.5	0.25	1.25	5100	0.137	4.90	4.20	0.164	35.5	0.5

Material
Housing:Plastic, UL94V-0

Electric:
Insulation Impedance:10MΩ /DC 250V Min
Voltage Withstand Test:AC 500V 1s

ANGLE TOLERANCE		PROJECTION	Description:			
±3°			DC Fans			
GENERAL TOLERANCE		UNITS	mm	KLS P/N:		L-KLS22-LX-4007-LHD05
.x	±0.30	SHEET SIZE		A4		
.xx	±0.20	Draw:	WuHao	2025-04-07	NingBo KLS ELECTRONIC CO.,LTD.	
.xxx	±0.10	Check:	Daniel	2025-04-07		