



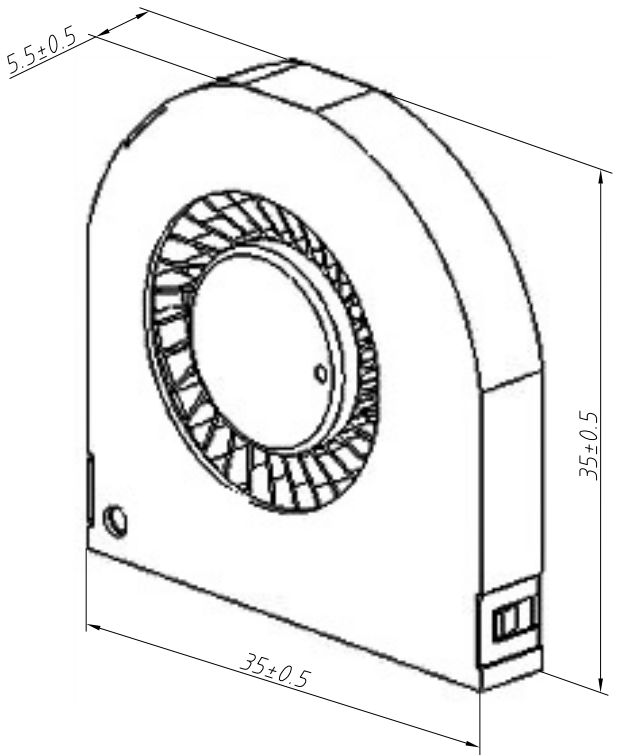

P&Q Curve (Under Rated Voltage)

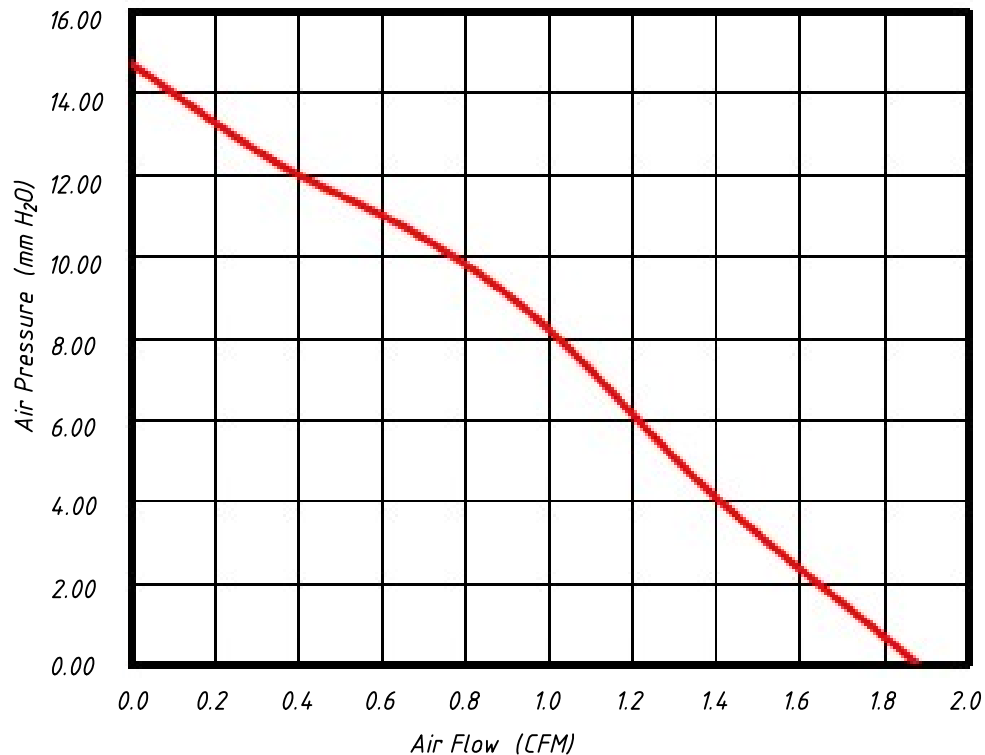

Bearing TYPE	Rated Voltage	Operating Voltage	Rated Current	Rated Inputpower	Speed	Maximum Air Flow		Maximum Air Pressure		Noise	Distance
	V DC	V DC	A MP	WATT	RPM	M ³ /Min	CFM	mm H ₂ O	IN H ₂ O	dB (A)	m
HDB	5	3.5~5.5	0.2	1	10000	0.053	1.88	14.7	0.574	53.8	0.1

Material
Housing:Plastic, UL94 V-0

Electric:
Insulation Impedance:10MΩ /DC 250V Min
Voltage Withstand Test:AC 500V 1s

ANGLE TOLERANCE		PROJECTION	Description:			
±3°			DC Fans			
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS22-LX-3506-HHD05	
.x	±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.	
.xx	±0.20	Draw:	WuHao	2025-04-15		
.xxx	±0.10	Check:	Daniel	2025-04-15		