



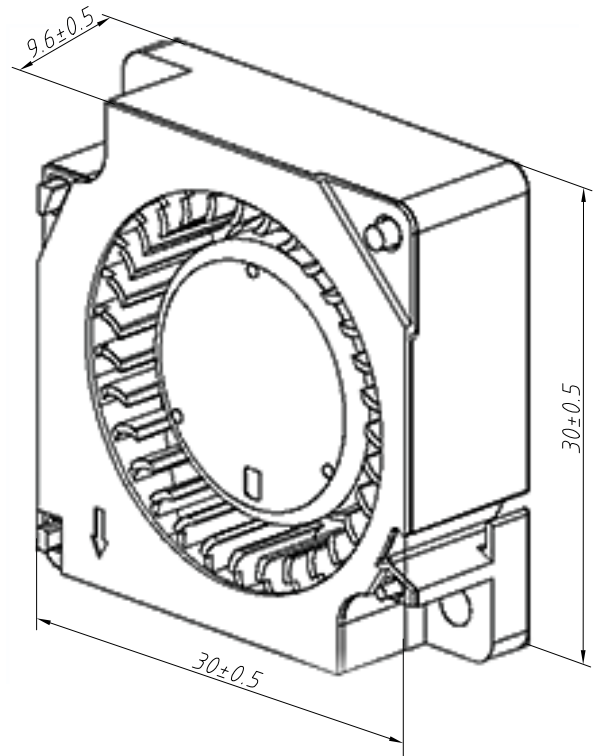

P&Q Curve (Under Rated Voltage)

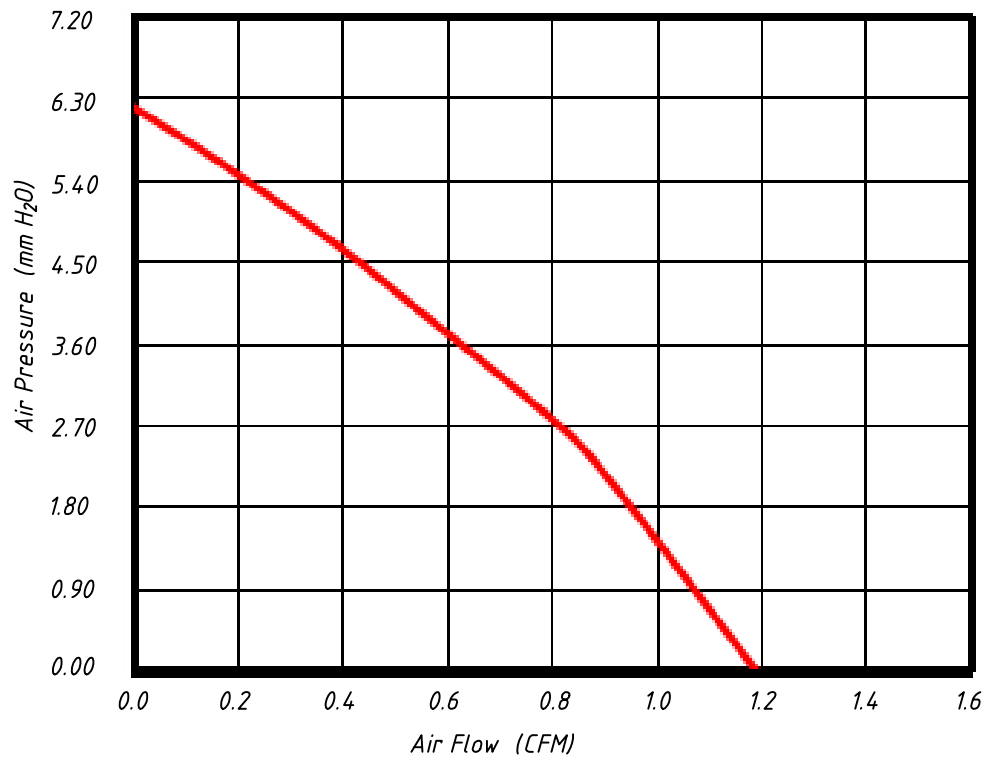

Bearing TYPE	Rated Voltage	Operating Voltage	Rated Current	Rated Inputpower	Speed	Maximum Air Flow		Maximum Air Pressure		Noise	Distance
	V DC	V DC	A MP	WATT	RPM	M ³ /Min	CFM	mm H ₂ O	IN H ₂ O	dB (A)	m
HDB	5	3.5~5.5	0.12	0.6	7000	0.033	1.19	6.2	0.242	33.5	0.5

Material
Housing:Plastic, UL94V-0

Electric:
Insulation Impedance:10MΩ /DC 250V Min
Voltage Withstand Test:AC 500V 1s

ANGLE TOLERANCE		PROJECTION	Description:	
±3°			DC Fans	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:
.x	±0.30	SHEET SIZE	A4	L-KLS22-LX-3010-MHD05
.xx	±0.20	Draw:	WuHao	2025-04-14
.xxx	±0.10	Check:	Daniel	2025-04-14

NingBo KLS ELECTRONIC CO.,L TD.