



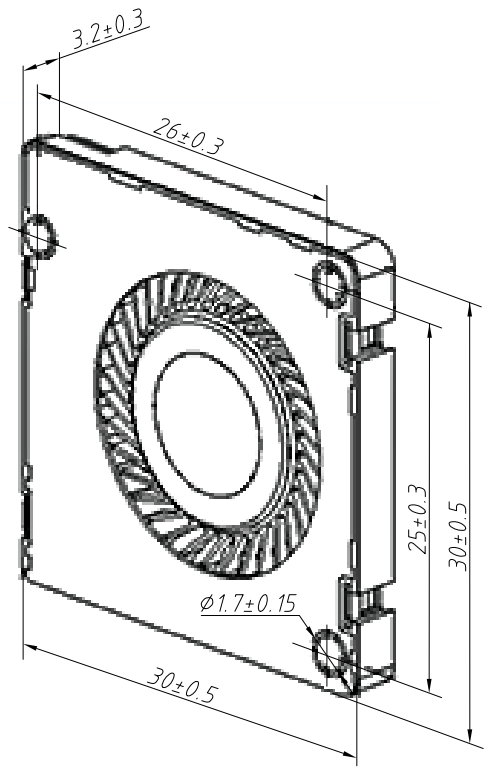

P&Q Curve (Under Rated Voltage)

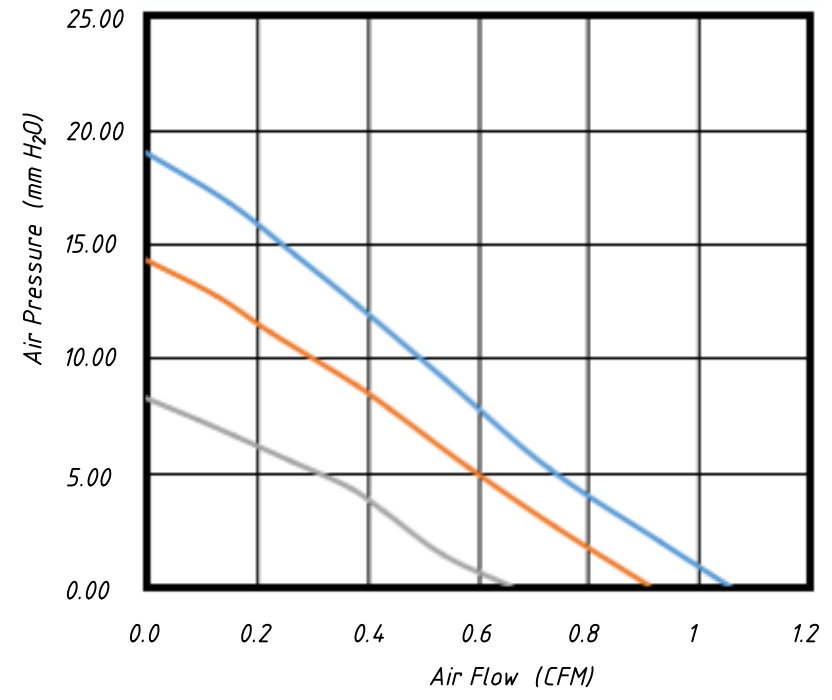

Model	Bearing TYPE	Rated Voltage	Operating Voltage	Rated Current	Rated Inputpower	Speed	Maximum Air Flow		Maximum Air Pressure		Noise	Distance
		V DC	V DC	A MP	WATT	RPM	M ³ /Min	CFM	mm H ₂ O	IN H ₂ O	dB (A)	m
L-KLS22-LX-3003-MHD05A	HDB	5	3.5~5.5	0.10	0.5	9500	0.018	0.66	8.25	0.322	32.1	0.3
L-KLS22-LX-3003-MHD05B	HDB	5	3.5~5.5	0.15	0.75	12500	0.025	0.91	14.30	0.558	41.1	0.3
L-KLS22-LX-3003-MHD05C	HDB	5	3.5~5.5	0.25	1.25	14500	0.030	1.06	18.99	0.741	45.1	0.3

Material
Housing:Plastic, UL94V-0

Electric:
Insulation Impedance:10M Ω /DC 250V Min
Voltage Withstand Test:AC 500V 1s

ANGLE TOLERANCE	PROJECTION		Description:
$\pm 3^{\circ}$			DC Fans
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
.x ± 0.30	SHEET SIZE	A4	L-KLS22-LX-3003-MHD05X
.xx ± 0.20	Draw:	WuHao	2025-04-14
.xxx ± 0.10	Check:	Daniel	2025-04-14

NingBo KLS ELECTRONIC CO.,L TD.