

Product Specification

Number: L-KLS5-BC9V-01-150

Name: Coin Cell Holders

Customer: _____

Date: 2025-08-14

Customer Signature:



NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566

Fax : 0086-574-86824882

**ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.**

Compi	Check	Review	Approva
Jenny	Jack.C		


Part name	Coin Cell Holders	Date	2025-08-14
Part number	L-KLS5-BC9V-01-150	Edition	V1
Department		Page	2 / 3

Material Name	Material Specification
Female Connector	☒ H65 Brass (RoHS) 0.25mm thick
Red Wire (+)	☐ SPCC Cold Rolled Steel Dual Finish (RoHS) 0.25mm thick
Male Connector	☒ H65 Brass (RoHS) 0.25mm thick
Black Wire (-)	☐ SPCC Cold Rolled Steel Dual Finish (RoHS) 0.25mm thick
Rivet	☒ H65 Brass (RoHS) 0.20mm thick
	☐ SPCC Cold Rolled Steel Dual Finish (RoHS) 0.20mm thick
Housing Material	☒ Black Non-toxic PVC 0.23mm thick
	☐ Blue Non-toxic PVC 0.23mm thick
	☐ Standard/Flame-retardant ABS Hard Shell Clip
Processing Method	☐ Soldering
	☒ Terminal Riveting
Insulating Spacer	☒ Natural Fishpaper (RoHS) 0.8mm thick
	☐ Black PVC Material (RoHS) 0.8mm thick
	☐ RoHS Epoxy Sheet 1.0mm thick
Plating	☒ RoHS Silver Plating
Wire	☐ UL1007 #24 AWG
	☐ Tin-plated Copper Clad Steel
	☐ Customer Supplied
	☒ UL1007 #26 Fully RoHS Compliant

Processable for PH2.0 / XH2.5 connectors.

KLS electronic	Part name	Coin Cell Holders	Date	2025-08-14
	Part number	L-KLS5-BC9V-01-150	Edition	V1
	Department		Page	3 / 3

附图(单位:mm)

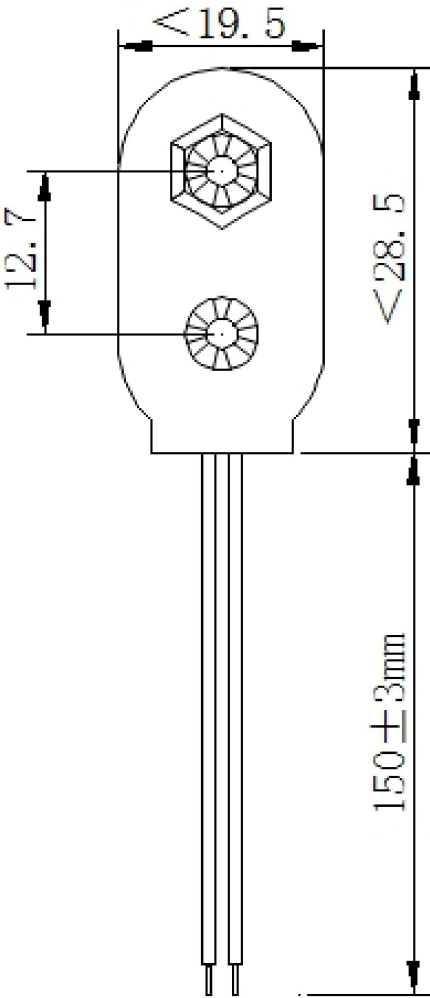

正负极五金件附图

黑线负极（子扣）				红线正极（母扣）			
A	B	C	D	E	F	G	H
Φ5.82mm ±0.1mm	Φ4.1mm ±0.1mm	Φ7.10mm ±0.1mm	Φ3.35mm ±0.1mm	Φ7.90mm ±0.1mm	Φ5.45mm ±0.1mm	Φ5.5mm ±0.1mm	Φ3.34mm ±0.05mm

