

1
RoHS Compliance

2

3

4

5

6

7

8

A

A

B

B

C

C

D

D

E

E

F



F

G

G

H

H

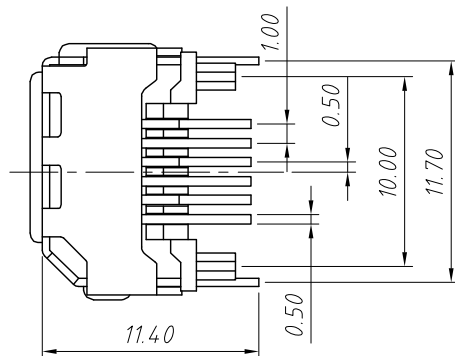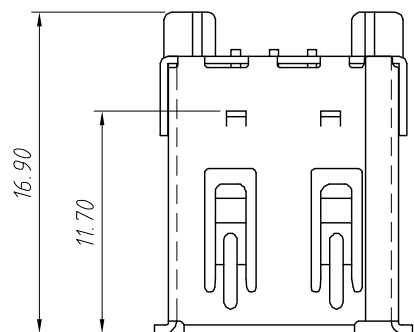

Material:

Housing: Thermoplastics, UL 94 V-0

Contact: Copper Alloy

Shell: SPCC

Electrical Characteristics:




Voltage Current Rating: 1.5 AMP, 40V AC

Insulator Resistance: 500M Ω min

Contact Resistance: 50m Ω max.

Dielectric Withstanding Voltage: 500V AC

Temperature Range: -20°C ~ +85°C

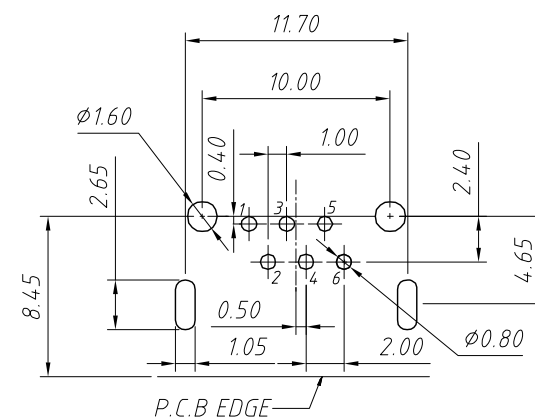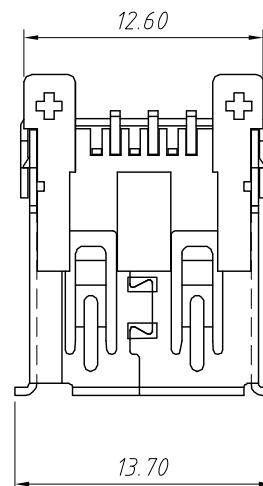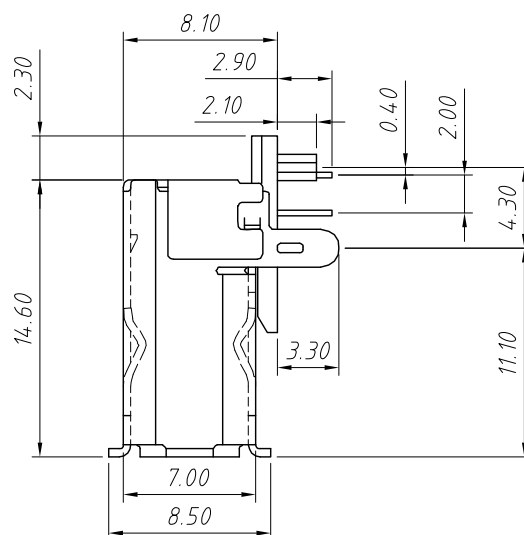

Recommended P.C.B Pattern Layout
Component Side

Order Information:


L-KLS1-1394-6FC-B

L: RoHS

IEEE 1394 Type

Color:

W=White B=Black

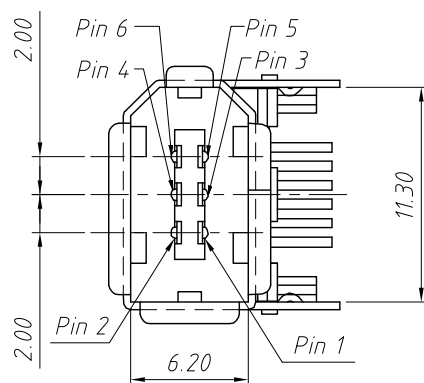

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				IEEE 1394 Connector 6P Female PCB Dip 90°	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-1394-6FC-B
x.x	± 0.30	SHEET SIZE	A4		
x.xx	± 0.20	Draw:	Daniel	2020-11-11	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	± 0.10	Check:	Daniel	2020-11-11	