


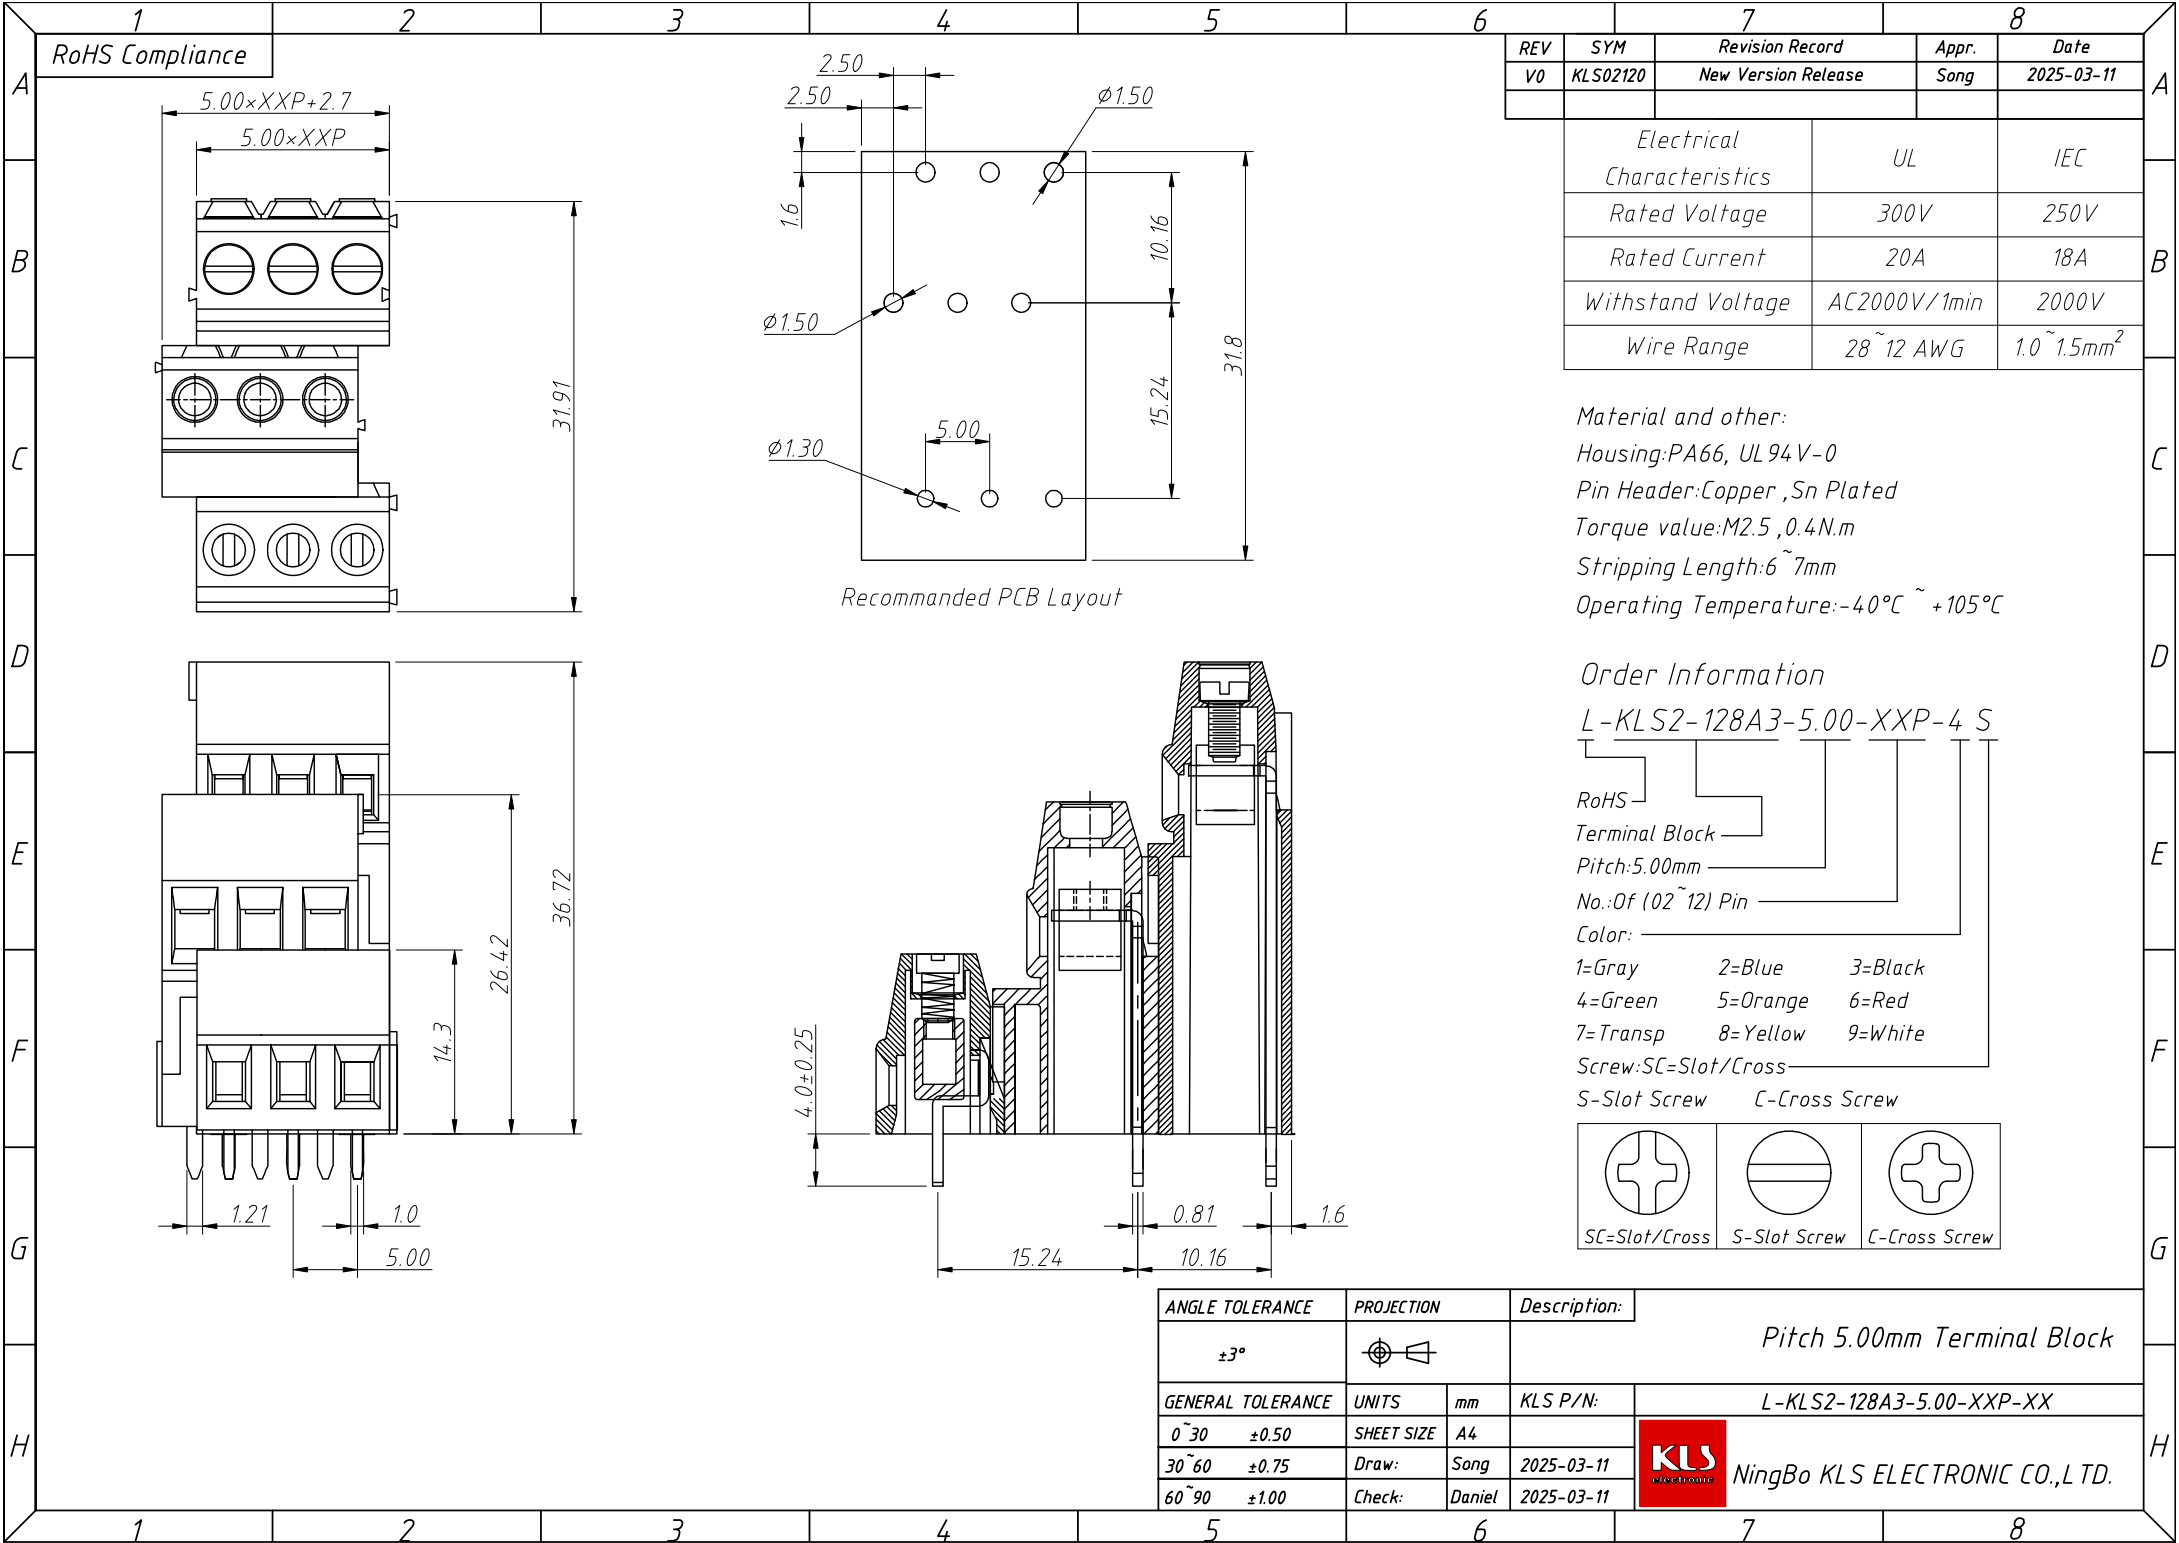


REV	SYM	Revision Record	Appr.	Date
V0	KLS02120	New Version Release	Song	2025-03-11

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	20A	18A
Withstand Voltage	AC2000V/1min	2000V
Wire Range	28~12 AWG	1.0~1.5mm ²


Material and other:
Housing:PA66, UL 94 V-0
Pin Header:Copper ,Sn Plated
Torque value:M2.5,0.4N.m
Stripping Length:6~7mm
Operating Temperature:-40℃ ~ +105℃

Order Information

L-KLS2-128A3-5.00-XXP-4 S

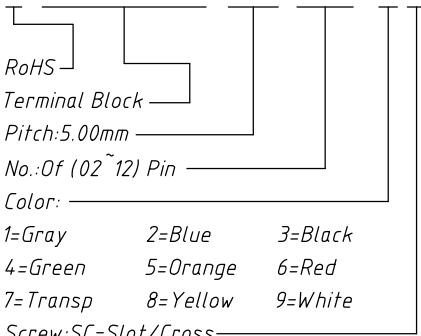

Screw:SC=Slot/Cross
S-Slot Screw C-Cross Screw

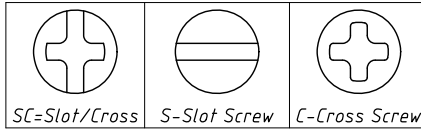

ANGLE TOLERANCE	PROJECTION	Description:	Pitch 5.00mm Terminal Block	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS2-128A3-5.00-XXP-XX
0~30 ±0.50	SHEET SIZE	A4		
30~60 ±0.75	Draw:	Song	2025-03-11	NingBo KLS ELECTRONIC CO.,L TD.
60~90 ±1.00	Check:	Daniel	2025-03-11	

