


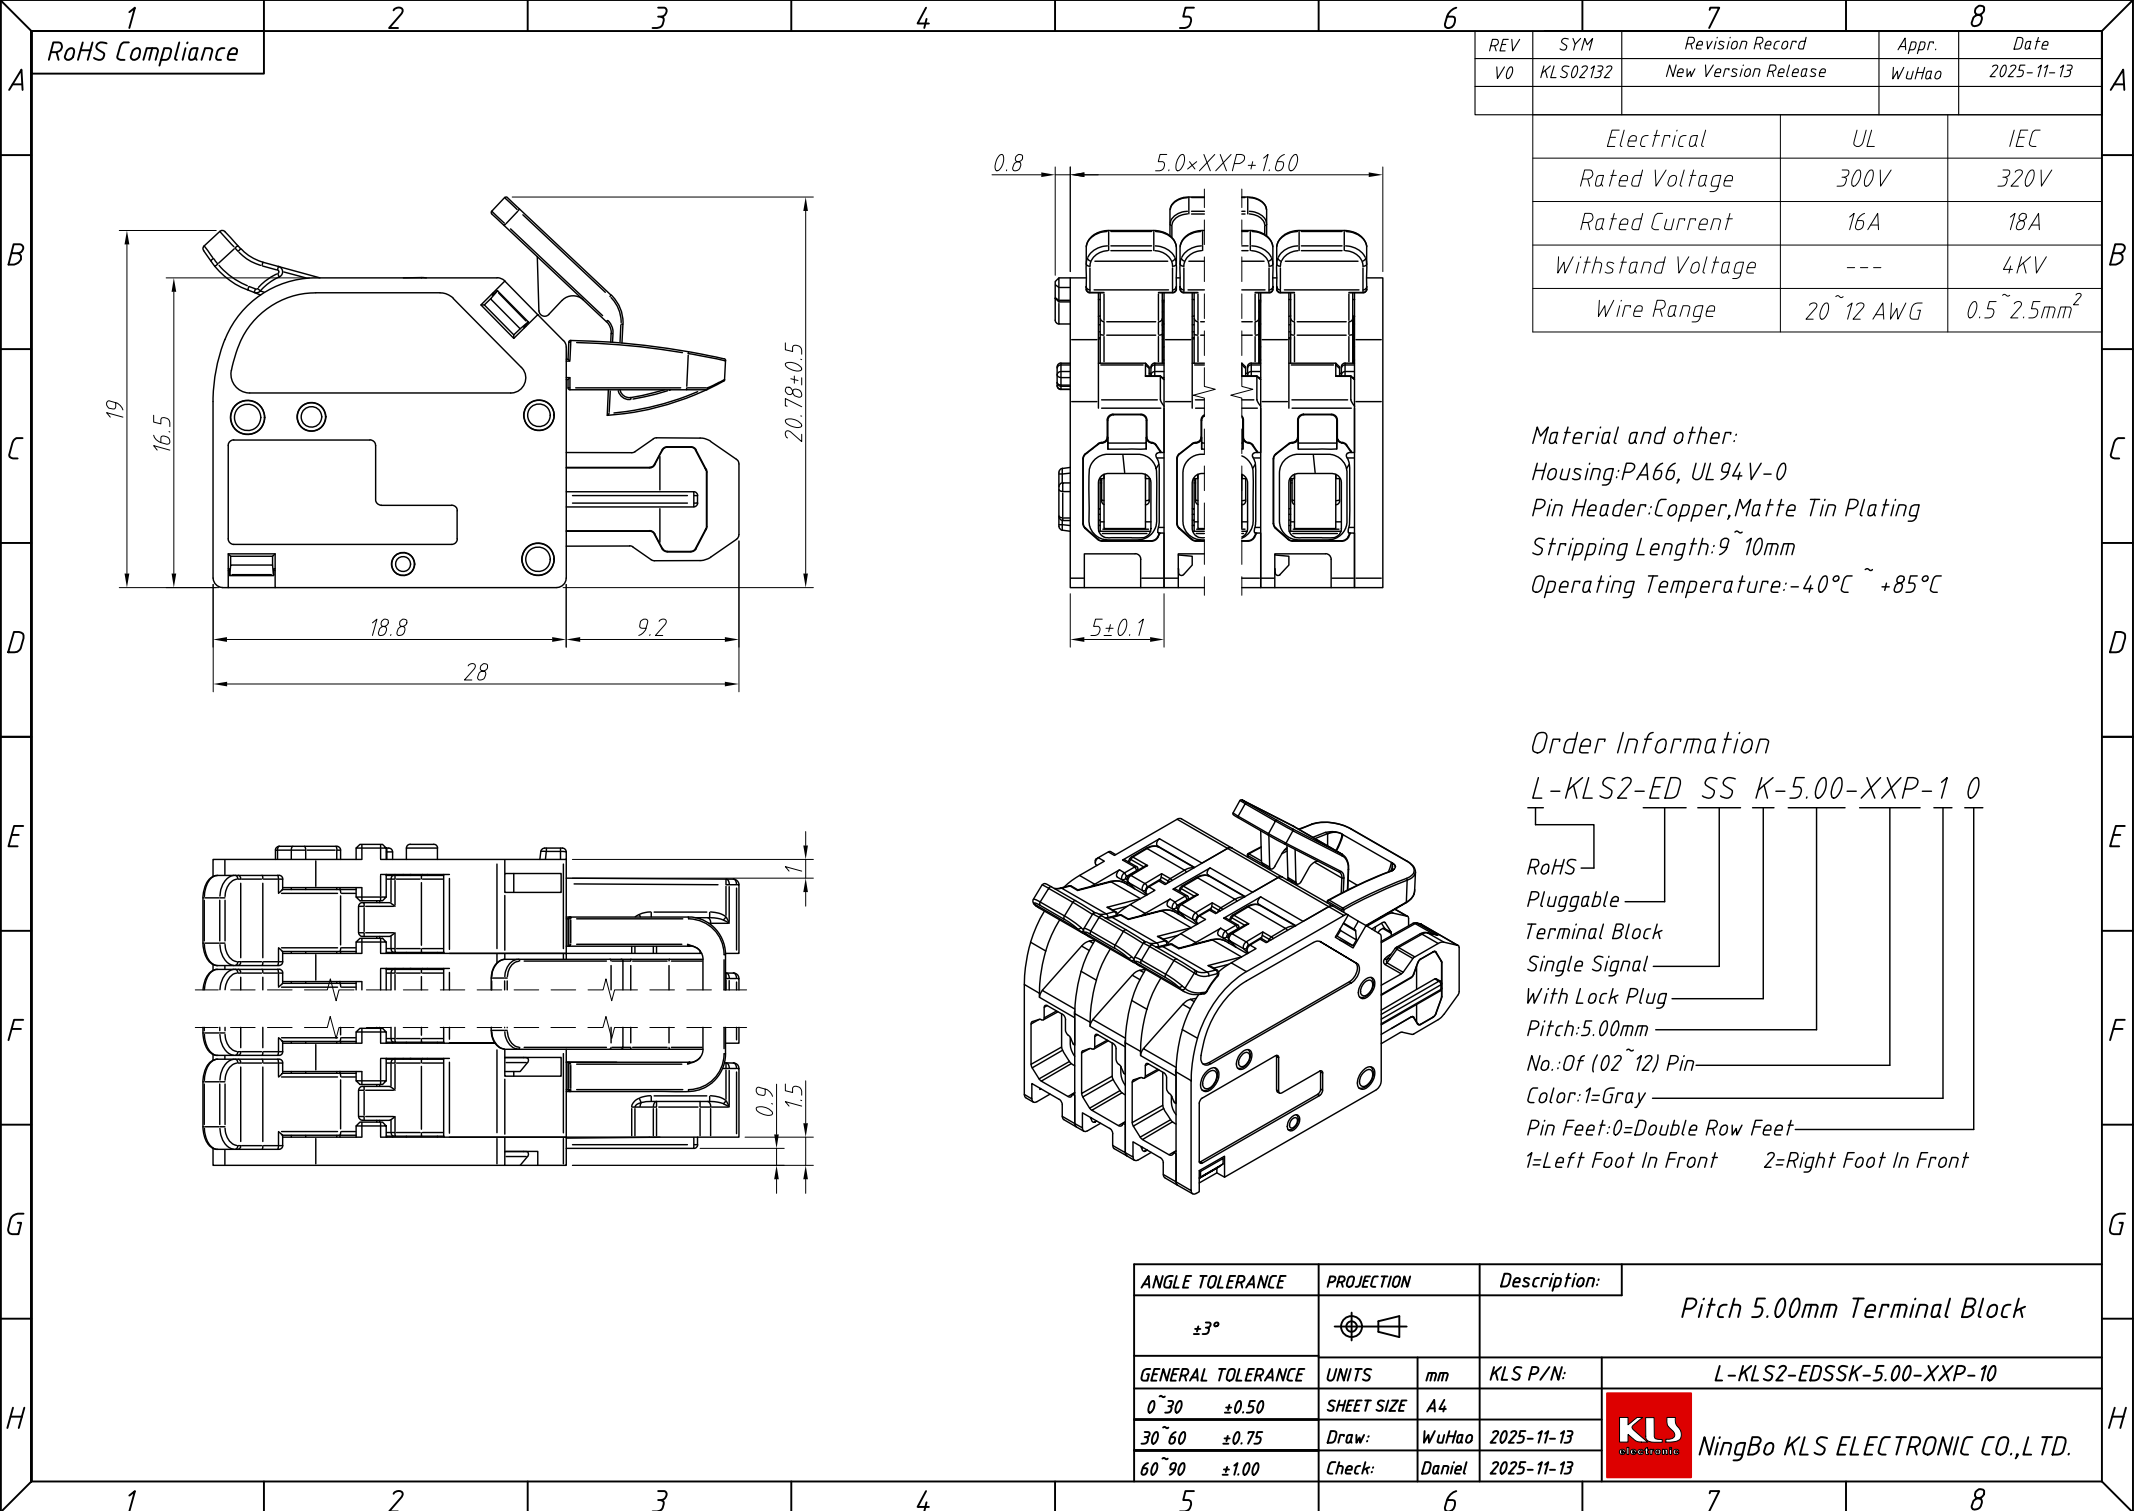

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02132	New Version Release	WuHao	2025-11-13

Electrical	UL	IEC
Rated Voltage	300V	320V
Rated Current	16A	18A
Withstand Voltage	---	4KV
Wire Range	20~12 AWG	0.5~2.5mm ²

Material and other:
Housing:PA66, UL94V-0
Pin Header:Copper,Matte Tin Plating
Stripping Length:9~10mm
Operating Temperature:-40℃ ~ +85℃

Order Information
L-KLS2-ED SS K-5.00-XXP-1 0

RoHS
Pluggable
Terminal Block
Single Signal
With Lock Plug
Pitch:5.00mm
No.:0f (02~12) Pin
Color:1=Gray
Pin Feet:0=Double Row Feet
1=Left Foot In Front 2=Right Foot In Front

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 5.00mm Terminal Block
GENERAL TOLERANCE	UNITS	mm
0~30	±0.50	SHEET SIZE A4
30~60	±0.75	Draw: WuHao 2025-11-13
60~90	±1.00	Check: Daniel 2025-11-13

NingBo KLS ELECTRONIC CO.,LTD.