


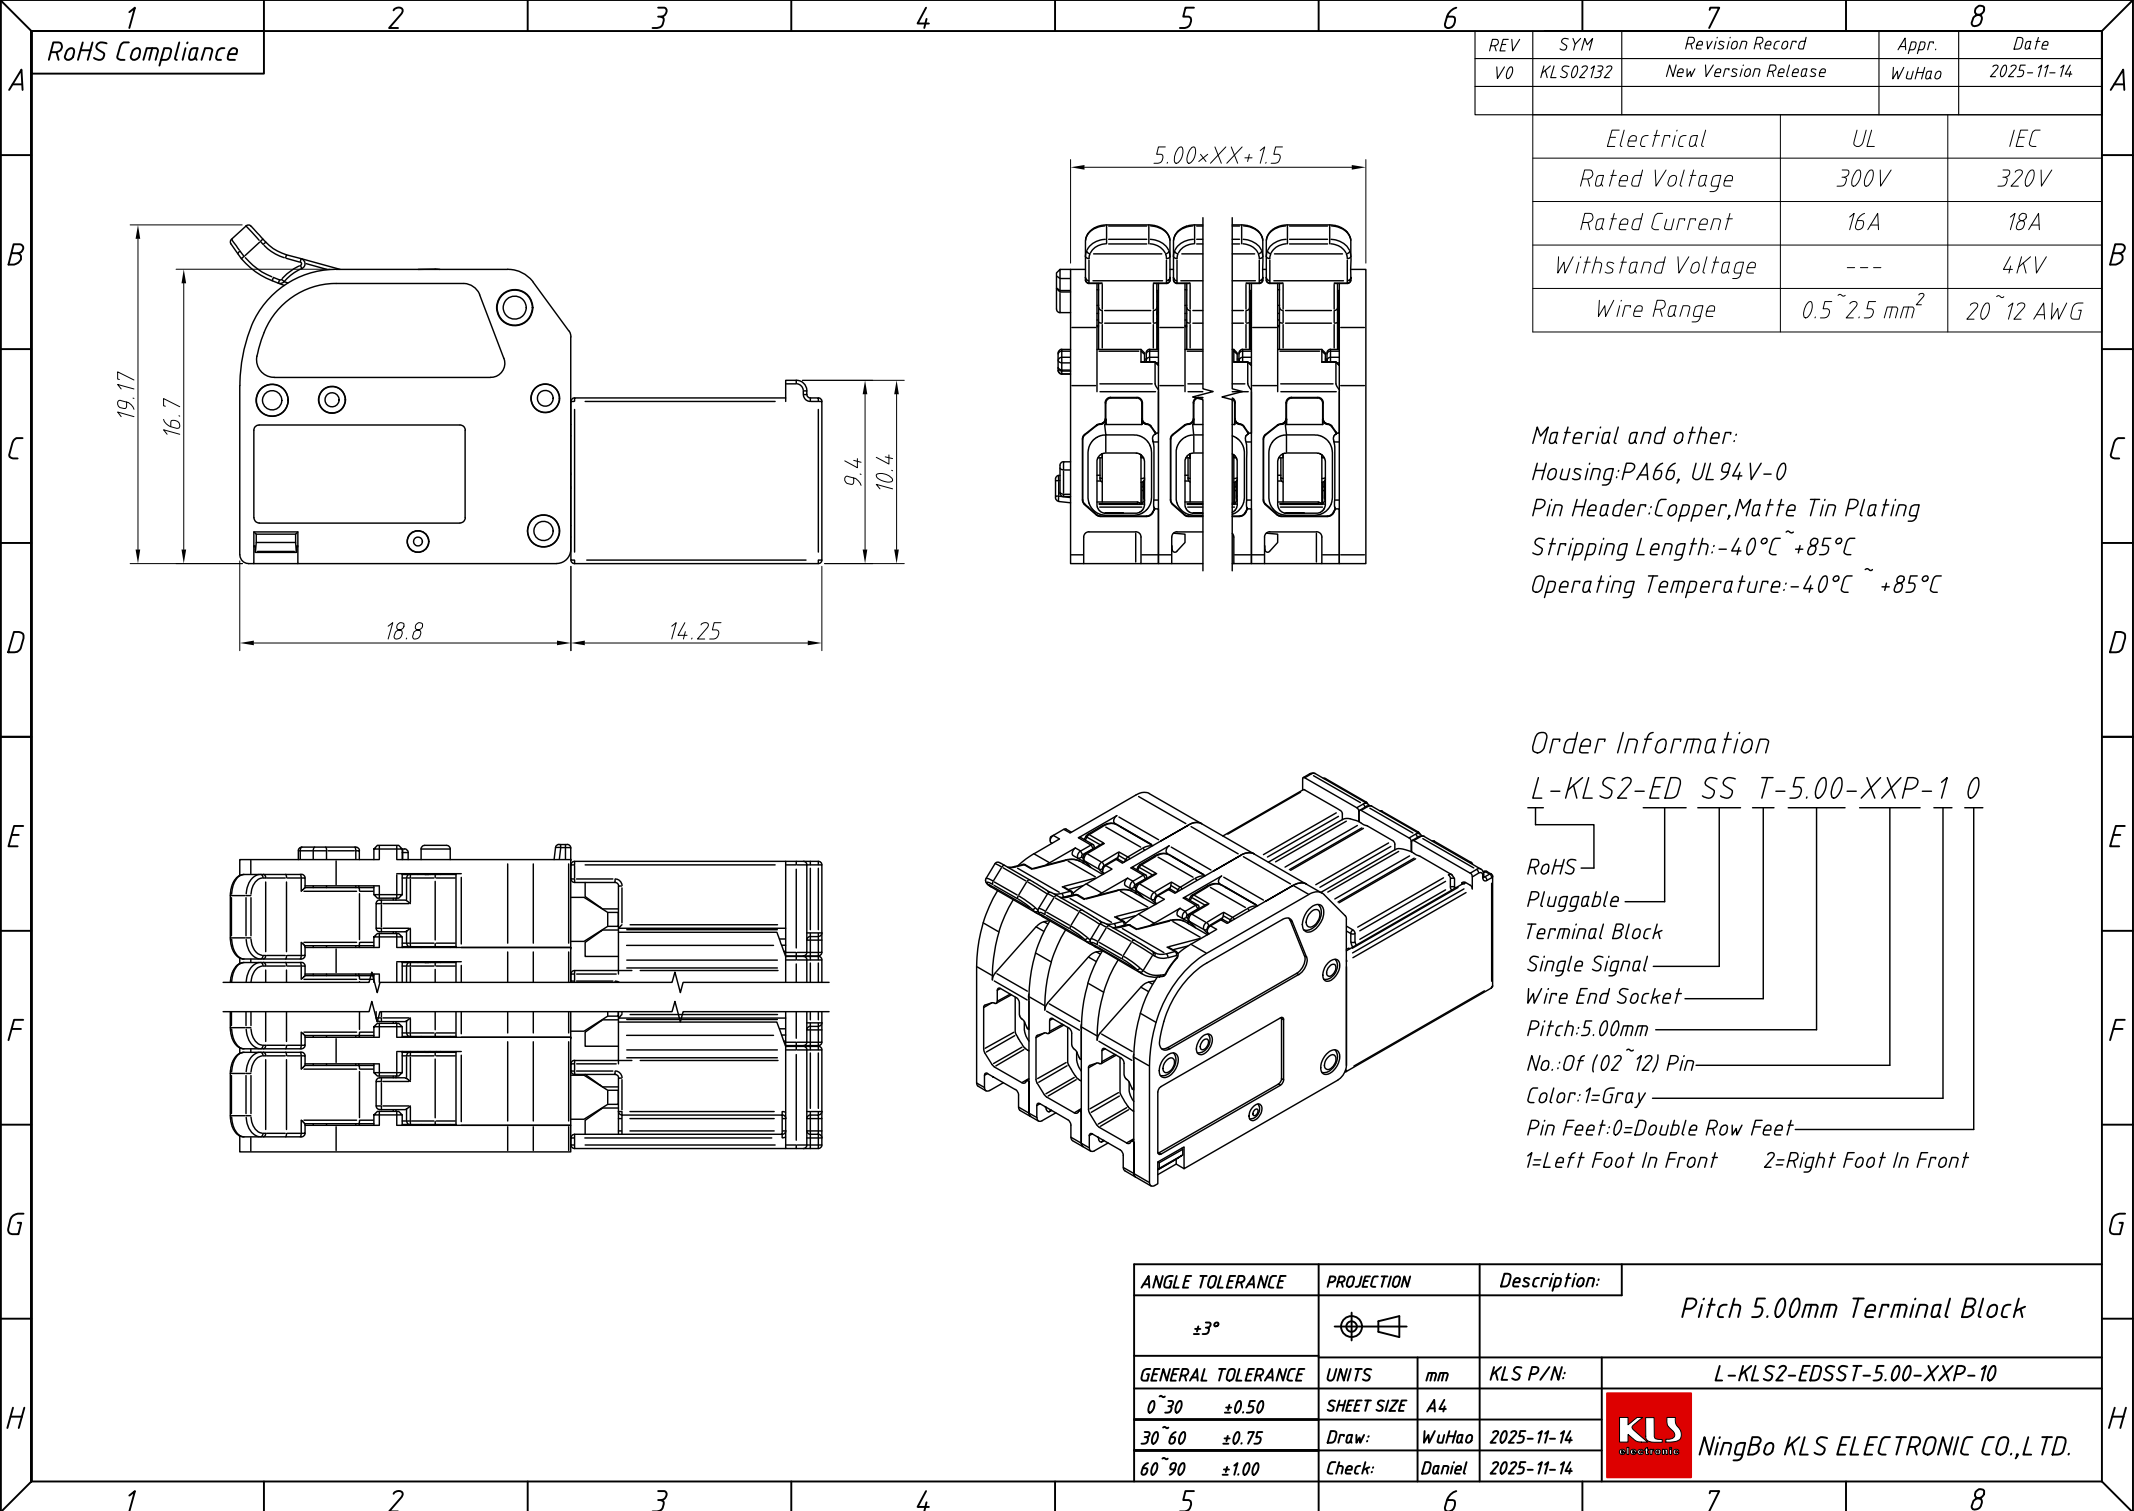

1

2

3

4

5

6

7

8

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02132	New Version Release	WuHao	2025-11-14

Electrical	UL	IEC
Rated Voltage	300V	320V
Rated Current	16A	18A
Withstand Voltage	---	4KV
Wire Range	0.5~2.5 mm ²	20~12 AWG

Material and other:

Housing:PA66, UL94V-0

Pin Header:Copper,Matte Tin Plating

Stripping Length:-40℃~+85℃

Operating Temperature:-40℃~+85℃

Order Information

L-KLS2-ED SS T-5.00-XXP-1 0

RoHS

Pluggable

Terminal Block

Single Signal

Wire End Socket

Pitch:5.00mm

No.:0f (02~12) Pin

Color:1=Gray

Pin Feet:0=Double Row Feet

1=Left Foot In Front 2=Right Foot In Front

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 5.00mm Terminal Block
GENERAL TOLERANCE	UNITS	mm
0~30	±0.50	SHEET SIZE A4
30~60	±0.75	Draw: WuHao 2025-11-14
60~90	±1.00	Check: Daniel 2025-11-14

NingBo KLS ELECTRONIC CO.,LTD.