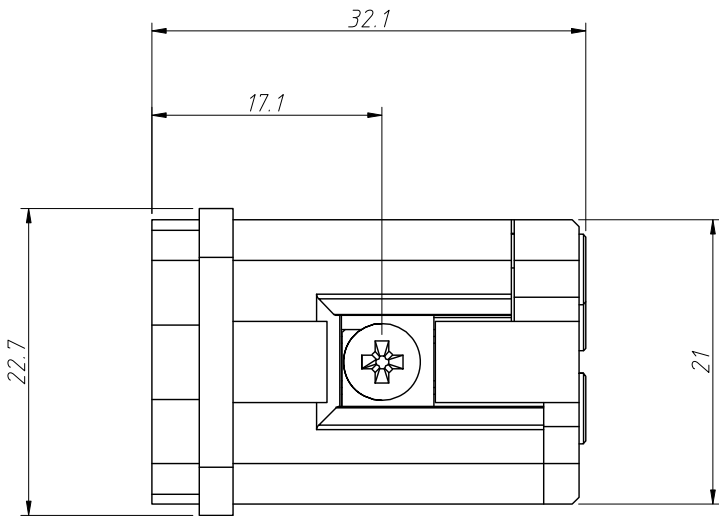


Material:
Housing:Polycarbonate,UL 94 V-0
Colour:RAL 7032 (Light grey)
Contacts:Copper Alloy,Hard-silver plated
Wire gauge:0.14 ~2.5mm² (26~14 AWG)
(For wires with crimped ferrule,wire gauge:0.14~1.5mm²AWG16)
Terminal:Spring terminal

Electrical Characteristics:
Number of contacts:2+PE
Rated Current:10A
Rated voltage-ground: 230V
Rated voltage-conductor:400V
Rated impulse voltage: 4kV
Pollution Degree:3
Rated Voltage Acc.to UL / CSA:600V
Insulation Resistance:10¹⁰Ω Min
Contact Resistance:1mΩ Max
Limiting Temperatures:-40℃~+125℃
Mating cycles:500 Times Min

Order Information:
L-KLS1-HA-002 MS
└┐┐┐┐
L:RoHS
HA series
No of contacts
Type:
Male Spring terminal

ANGLE TOLERANCE	PROJECTION	Description:	Heavy Duty Connectors,HA series	
±3°			2 Contacts,Male Spring terminal	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-HA-002MS
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Song	2025-07-14	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ±0.10	Check:	Daniel	2025-07-14	