


# Product Specification

Number: L-KLS5-2410-25F-xxxxH/LxxxV

Name: Micro Fuses (Fast-Acting)

Customer: \_\_\_\_\_

Date: 2026-05-25

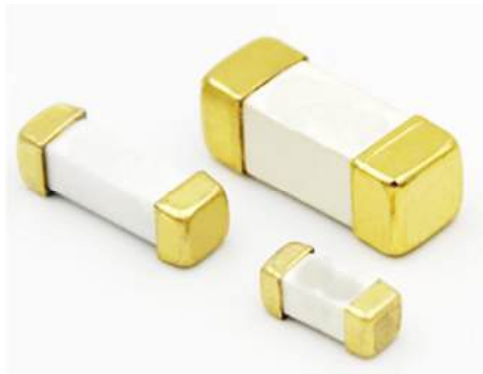

**NINGBO KLS ELECTRONIC CO; LTD**

Tel : 0086-574-86828566

Fax : 0086-574-86824882


ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN  
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.

Compi	Check	Review	Approva
Jenny	Jack.C		

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-xxxV	Edition	V1
Department		Page	2 / 23

## Order Information

L-KLS5-2410-25   F   -   xxxxH / L-xxxV

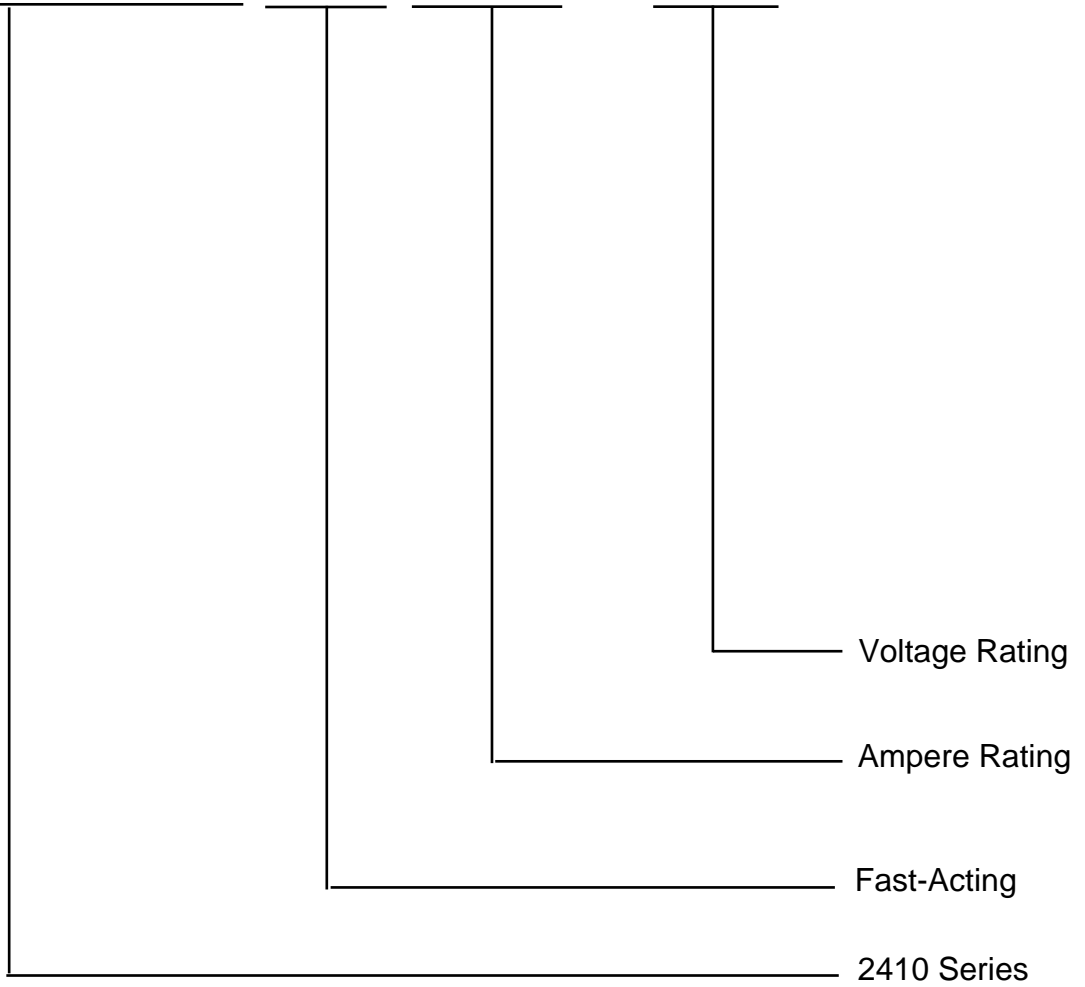

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-L-KLS5-2410-25F-xxxxH/L63/72//125V	Edition	V1
Department		Page	3 / 23

## 1. 产品特性及应用范围 / Description, Features and Applications

本产品适用于各类电子设备电路初、次级电路板的过流保护，广泛应用于固态照明、电池充电、消费电子、电子镇流器、LED AC/DC 电源供应、网络通信、医疗仪器及工业控制器等领域。

### Descriptions:

Fast-Acting square Surface Mount fuses are ceramic tube/end cap constructions, RoHS compliant, Halogen Free and lead(Pb) exempts of the requirements of RoHS Directive(2002/95/EC), with U.S. (UL/CSA) safety agency approvals. Provide board level primary and secondary circuit protection in a wide variety of applications. With excellent inrush current withstanding capability, excellent reliability for thermal and mechanic shock, also have a high reliability and stable solder ability, end caps are available in gold/silver/nickel plated.

### Features:

- Fast-Acting (Fast-Acting)
- Wide range of current rating available
- Low temperature de-rating
- Tape and Reel for automatic placement
- Small size(6.1mm\*2.5mm)
- Wide operating temperature range
- RoHS compliant
- Conflict free metals

### Applications:



- LED lighting
- LCD backlight inverter
- PC server
- Wireless base station
- Digital camera
- Notebook PC
- Portable Devices
- Cooling fan system
- White goods
- Industrial equipment
- Battery devices
- Power supply
- Storage system
- Game console
- Medical equipment
- LCD/PDP devices
- Networking devices
- Telecom system
- Office equipment
- Automotive devices

## 2. 安规认证标准及编号 / Standards and Agency Approvals

2.1 执行标准：遵循 UL 248-14。

Standards: In accordance with UL 248-14.

2.2 认证范围 Certification:

安规标准 Agency	认证范围 Ampere Range	证书编号 Agency File Number
	50mA ~ 40A	E340xxx(JDYxx)
	50mA ~ 40A	E340xxx(JDYxx)

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-63/72//125V	Edition	V1
Department		Page	4 / 23

2.3 目录编号 Catalogue No., ● 已认证 Approved / ○ 认证中 Pending

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	分断能力 Breaking Capacity	冷阻值 Nominal Cold Resistance (Ohms)	熔化热能 I <sup>2</sup> T Melting Integral (A <sup>2</sup> .S)	安规认证 Agency Approvals		
25F-0160	160mA	125VAC/DC	50A@300VAC 50A@250VAC 200A@125VAC	2.308	0.056	●	●	○
25F-0200	200mA			1.655	0.060	●	●	○
25F-0250	250mA			1.456	0.063	●	●	○
25F-0300	300mA			0.855	0.190	●	●	○
25F-0315	315mA			0.656	0.200	●	●	○
25F-0375	375mA			0.605	0.328	●	●	○
25F-0400	400mA			0.580	0.335	●	●	○
25F-0500	500mA			0.302	0.471	●	●	○
25F-0600	600mA			0.268	0.771	●	●	○
25F-0630	630mA			0.259	0.982	●	●	○
25F-0700	700mA			0.233	2.102	●	●	○
25F-0750	750mA			0.227	2.230	●	●	○
25F-0800	800mA			0.205	2.375	●	●	○
25F-010	1A			0.129	3.685	●	●	○
25F-013	1.25A			0.095	3.755	●	●	○
25F-015	1.5A			0.089	6.751	●	●	○
25F-016	1.6A			0.078	6.800	●	●	○
25F-020	2A			0.039	12.140	●	●	○
25F-025	2.5A			0.036	16.005	●	●	○
25F-030	3A			0.028	21.550	●	●	○
25F-032	3.15A			0.027	25.740	●	●	○
25F-035	3.5A			0.026	30.041	●	●	○
25F-040	4A			0.020	43.201	●	●	○
25F-050	5A			0.015	55.240	●	●	●
25F-060	6A			0.013	75.205	●	●	●
25F-063	6.3A			0.011	93.540	●	●	●
25F-070	7A			0.010	97.110	●	●	●
25F-080	8A			0.0080	108.700	●	●	●
25F-100	10A			0.0072	118.320	●	●	●
25F-120	12A			0.0050	140.050	●	●	●
25F-150	15A	0.0035	210.630	●	●	●		
25F-160	16A	72VDC	500A@72VDC	0.0030	215.210	●	●	●
25F-200	20A	72VDC	500A@72VDC	0.0028	358.020	●	●	●
25F-250	25A	72VDC	500A@72VDC	0.00159	465.150	●	●	●
25F-300	30A	72VDC	500A@72VDC	0.00148	980.610	●	●	●
25F-400	40A	63VDC	500A@63VDC	0.00123	1040.720	●	●	●

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-63/72//125V	Edition	V1
Department		Page	5 / 23

- \*: These catalog no. cold resistance and I2t value are pending due to fuse elements shall be customized;
- DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25°C;
- Typical Pre-arching I2t are calculated at 10\*In Current or 8ms;
- Min Interrupting Rating: 1.35\*In.

### 3. 产品标示 / Product Marking

保险丝上需有下列标示 / The fuses shall have the following markings


示例 Example:



注: 对于标示的大小和位置没有规定 / Note: Size and position of the markings shall not be provided.

### 4. 结构及尺寸 / Dimensions and Structure

单位: 毫米 / Unit: mm

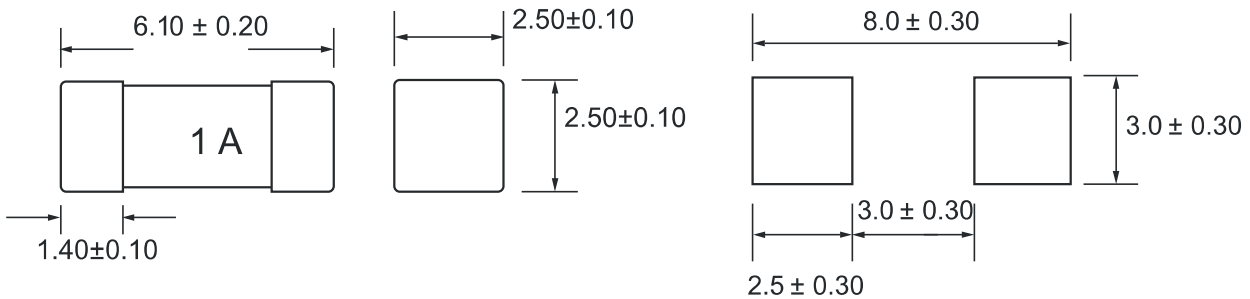

### 5. 材料明细 / Material Details

编号 NO.	零件名称 Part Name	材质 Material
①	端帽 End caps	黄铜镀金 Au Plated Brass Cap
②	主体 Body	陶瓷管 Non-Transparent Square Ceramic Tube
③	熔丝 Fuse element	合金 Cu-Ag Alloy wire

### 6. 产品特性 / Product Characteristics

编号 NO.	项目 Item	内容 Content	参考标准 Reference standards
1	产品标识	Brand, Ampere Rating	marking standards

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-L-KLS5-2410-25F-xxxxH/L63/72//125V	Edition	V1
Department		Page	6 / 23

	Product Marking		
2	工作温度 Operating Temperature	-55°C to 125°C	IEC60068-2-1/2
3	可焊性 Solderability	T=240°C ± 5°C, t=3sec ± 0.5sec, Coverage ≥ 95%	MIL-STD-202, Method 208
4	耐焊接热 Resistance to Soldering Heat	10 sec at 260°C	MIL-STD-202, Method 210, Test condition B
5	绝缘阻抗 Insulation Resistance (after Opening)	10,000 ohms minimum	MIL-STD-202, Method 302, Test Condition A
6	热冲击 Thermal Shock	5 cycles, -65°C / +125°C, 15 minutes at each extreme	MIL-STD-202, Method 107, Test Condition B
7	机械冲击 Mechanical Shock	100G's peak for 6 milliseconds, 3cycles	MIL-STD-202, Method 213, Test I
8	振动试验 Vibration	0.03" amplitude, 10-55 Hz in 1 min. 2hrs each XYZ=6hrs	MIL-STD-202, Method 201
9	耐湿性 Moisture Resistance	10 cycles	MIL-STD-202, Method 106
10	盐雾试验 Salt Spray	5% salt solution, 48hrs	MIL-STD-202, Method 101, Test Condition B

## 7. 电气特性 / Electrical Characteristics

### 7.1 实验条件: Test Condition

所有测试环境温度为 25±5°C。

All electrical test is to be conducted with the ambient air at a temperature of 25±5°C.

### 7.2 分断能力 Interrupting Rating:

保险丝承受分断能力: 50A@250Vac, 200A@125Vac.

Breaking Capacity: 50A@250Vac, 200A@125Vac.


### 7.3 熔断时限 / Operating Characteristics

额定电流 Rated Current	额定电流的% % of Ampere Rating(In)	熔断时间 Blowing Time
160mA-40A	100% * In	大于 4 小时(4 hours Min)
500mA-40A	200% * In	小于 120 秒 (120 sec Max)

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-63/72//125V	Edition	V1
Department		Page	7 / 23

160mA-400mA	210% * In	小于 120 秒 (120 sec Max)
-------------	-----------	------------------------

#### 7.4 平均时间电流曲线图 / Average Time Current Curves

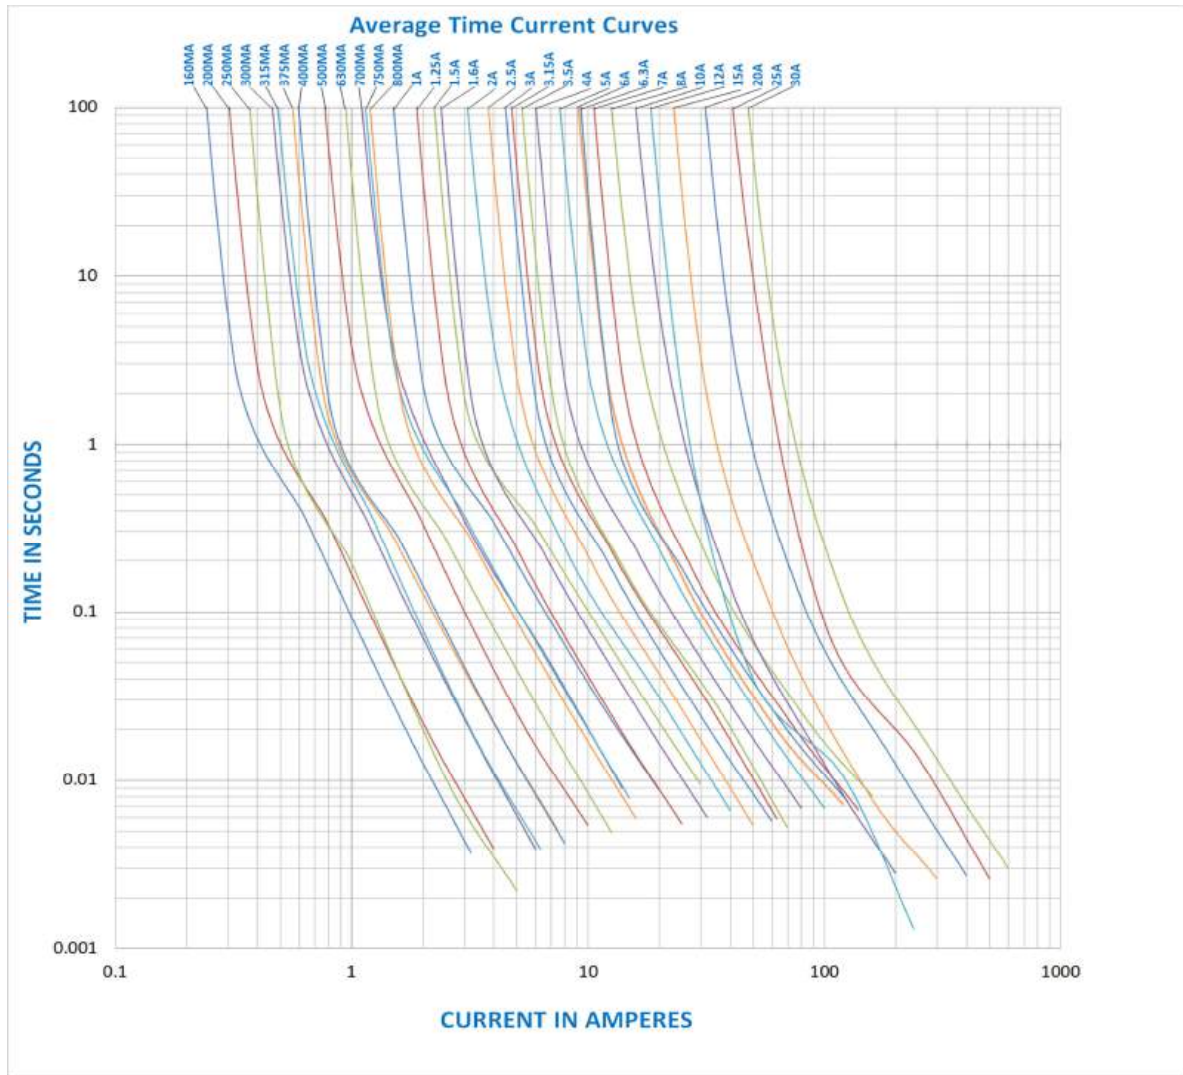


#### 8. 环境特性 / Environmental Characteristic

若操作环境温度超出  $25 \pm 5^\circ\text{C}$  范围，在选用保险丝规格时，需考虑操作环境温度对保险丝的影响，请参照如下：温度-电流曲线图。

When choosing the fuse's specification, if the operating environmental temperature beyond the scope from  $20\sim 30^\circ\text{C}$ , engineer should consider the environmental temperature's affection to fuses.

Please refer: Temperature Rerating Curve:

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-63/72//125V	Edition	V1
Department		Page	8 / 23

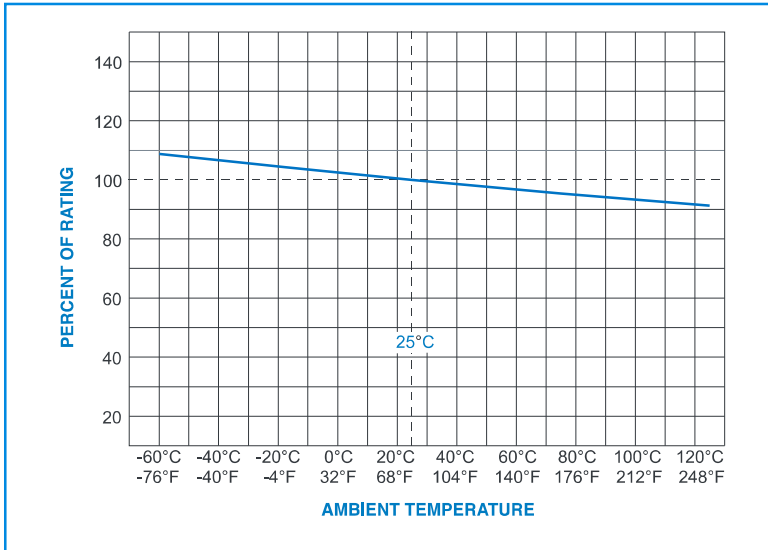

### 9. 建议焊接参数 / Recommended Soldering Parameters


#### A. 波峰/回流焊参数 / Wave /Reflow Soldering Parameters:

锡膏工艺 / Solder paste process.

锡炉温度 / Solder Pot Temperature: 260°C Max;

焊接时间 / Solder Dwell Time: 5 seconds max

Reflow Condition		Pb-Free assembly
Average ramp-up rate (Ts(max) to Tp)		5°C /second max.
Preheat	Temperature Min (Ts(min))	150°C
	Temperature Max (Ts(max))	200°C
	Time (Min to Max) (ts)	60-120 seconds
Reflow	Temperature (T <sub>L</sub> )	220°C
	Time Max (t <sub>L</sub> )	60 seconds
Peak Temperature(T <sub>p</sub> )		260°C max
Ramp-down Rate		5°C/second max
Time 25°C to peak temperature (Tp)		8 minutes max

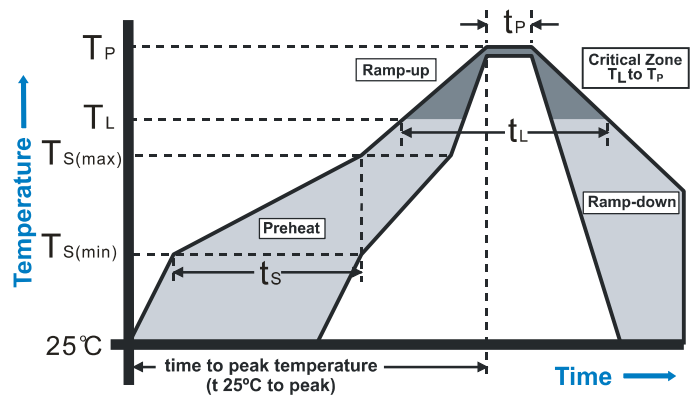

#### B. 手工焊参数 / Hand-Solder Parameters:


烙铁温度 / Solder Iron Temperature: 300 ± 5°C

焊接时间 / Heating Time: 1~2 s Max


Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-63/72//125V	Edition	V1
Department		Page	9 / 23

### 10. 包装 / Packaging

1500 个每卷/ 1,500 pcs in 7 inches dia. reel, 12mm wide tape, EIA Standard 481

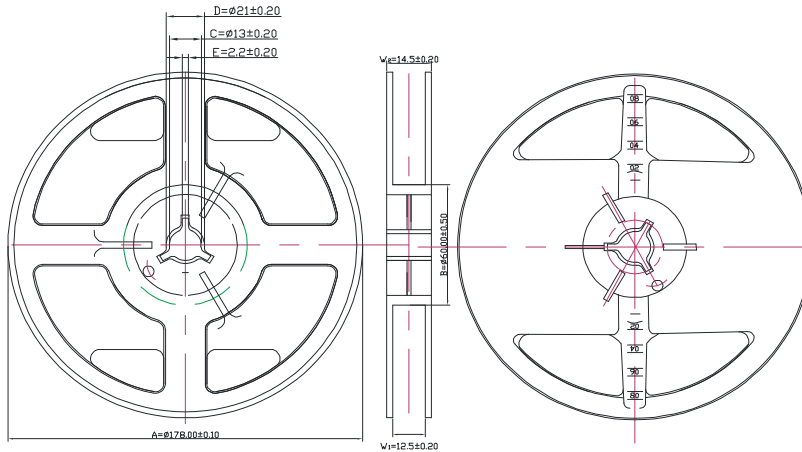

Item	A	B	C	D	E	W1	W2
Spec.(mm)	178±0.10	60±0.50	13±0.20	21±0.20	2.2±0.20	12.5±0.20	14.5±0.20

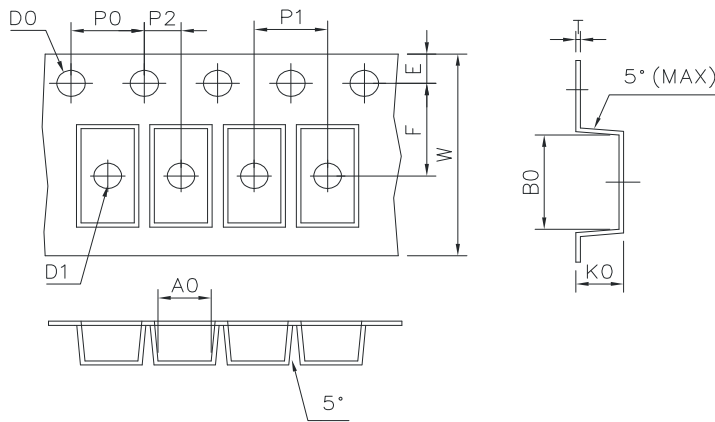

Item	A <sub>0</sub>	B <sub>0</sub>	D <sub>0</sub>	D <sub>1</sub>	E	F
Spec.(mm)	2.70±0.10	6.40±0.10	1.50±0.10	1.50±0.25	1.75±0.10	5.50±0.10
Item	K <sub>0</sub>	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	W	t
Spec.(mm)	2.70±0.10	4.00±0.10	4.00±0.10	2.00±0.10	12.00±0.15	0.25±0.05

### 11. 其他 / Others

11.1 如果在使用中有超出本规格书的要求，须经双方协商确认。

In the event that an impropriety is found beyond this specification, it shall be fixed by mutual agreement between the parties.

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-L-KLS5-2410-25F-xxxxH/L250V	Edition	V1
Department		Page	10 / 23

## 1. 产品特性及应用范围 / Description, Features and Applications

本产品适用于各类电子设备电路初、次级电路板的过流保护, 广泛应用于固态照明、电池充电、消费电子、电子镇流器、LED AC/DC 电源供应、网络通信、医疗仪器及工业控制器等领域。

### Descriptions:

Fast-Acting square Surface Mount fuses are ceramic tube/end cap constructions, RoHS compliant, Halogen Free and lead(Pb) exempts of the requirements of RoHS Directive(2002/95/EC), with U.S. (UL/CSA) safety agency approvals. Provide board level primary and secondary circuit protection in a wide variety of applications. With excellent inrush current withstanding capability, excellent reliability for thermal and mechanic shock, also have a high reliability and stable solder ability, end caps are available in gold/silver/nickel plated.

### Features:

- *Fast-Acting (Fast-Acting)*
- *Wide range of current rating available*
- *Low temperature de-rating*
- *Tape and Reel for automatic placement*
- *Small size(6.1mm\*2.5mm)*
- *Wide operating temperature range*
- *RoHS compliant*
- *Conflict free metals*

### Applications:

- LED lighting
- LCD backlight inverter
- PC server
- Wireless base station
- Digital camera
- Notebook PC
- Portable Devices
- Cooling fan system
- White goods
- Industrial equipment
- Battery devices
- Power supply
- Storage system
- Game console
- Medical equipment
- LCD/PDP devices
- Networking devices
- Telecom system
- Office equipment
- Automotive devices

## 2. 安规认证标准及编号 / Standards and Agency Approvals

2.1 执行标准: 遵循 UL 248-14。

Standards: In accordance with UL 248-14.

2.2 认证范围 Certification:

安规标准 Agency	认证范围 Ampere Range	证书编号 Agency File Number
UL	50mA ~ 7A	E340xxxJDYxx)
cUL	50mA ~ 7A	E340xxx(JDYxx)

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-250V	Edition	V1
Department		Page	11 / 23

2.3 目录编号 Catalogue No., ● 已认证 Approved / ○ 认证中 Pending

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	分断能力 Breaking Capacity	冷阻值 Nominal Cold Resistance (Ohms)	熔化热能 I <sup>2</sup> TMelting Integral(A <sup>2</sup> .S)	安规认证 Agency Approvals		
25F-0160	160mA	250VAC	50A@300VAC 50A@250VAC 200A@125VAC	2.308	0.058	●	●	○
25F-0200	200mA			1.655	0.062	●	●	○
25F-0250	250mA			1.456	0.065	●	●	○
25F-0300	300mA			0.855	0.191	●	●	○
25F-0315	315mA			0.656	0.202	●	●	○
25F-0375	375mA			0.605	0.330	●	●	○
25F-0400	400mA			0.580	0.338	●	●	○
25F-0500	500mA			0.302	0.475	●	●	○
25F-0600	600mA			0.268	0.775	●	●	○
25F-0630	630mA			0.259	0.986	●	●	○
25F-0700	700mA			0.233	2.105	●	●	○
25F-0750	750mA			0.227	2.240	●	●	○
25F-0800	800mA			0.205	2.380	●	●	○
25F-010	1A			0.129	3.690	●	●	○
25F-013	1.25A			0.095	3.760	●	●	○
25F-015	1.5A			0.089	6.765	●	●	○
25F-016	1.6A			0.078	6.805	●	●	○
25F-020	2A			0.039	12.150	●	●	○
25F-025	2.5A			0.036	16.025	●	●	○
25F-030	3A			0.028	21.560	●	●	○
25F-032	3.15A			0.027	25.750	●	●	○
25F-035	3.5A			0.026	30.050	●	●	○
25F-040	4A			0.020	43.208	●	●	○
25F-050	5A			0.015	55.250	●	●	●
25F-060	6A			0.013	75.245	●	●	●
25F-063	6.3A			0.011	93.550	●	●	●
25F-070	7A			0.010	97.120	●	●	●
25F-080	8A			0.0080	108.750	○	○	●
25F-100	10A			0.0072	118.380	○	○	●
25F-120	12A			0.0050	140.080	○	○	●
25F-150	15A			0.0035	210.680	○	○	●
25F-160	16A			0.0032	215.080	○	○	●
25F-200	20A	0.0020	358.080	○	○	●		


Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-250V	Edition	V1
Department		Page	12 / 23

- \*: These catalog no. cold resistance and I2t value are pending due to fuse elements shall be customized;
- DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25°C;
- Typical Pre-arching I2t are calculated at 10\*In Current or 8ms;
- Min Interrupting Rating: 1.35\*In.

### 3. 产品标示 / Product Marking

保险丝上需有下列标示 / The fuses shall have the following markings


示例 Example:

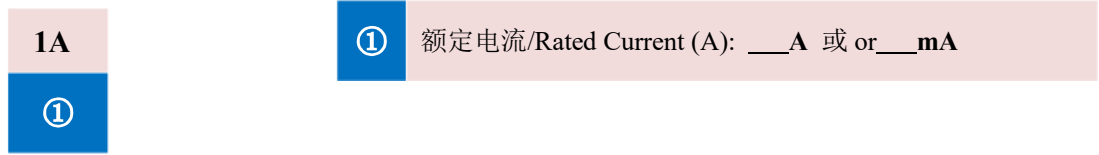

注: 对于标示的大小和位置没有规定 / Note: Size and position of the markings shall not be provided.

### 4. 结构及尺寸 / Dimensions and Structure

单位: 毫米 / Unit: mm

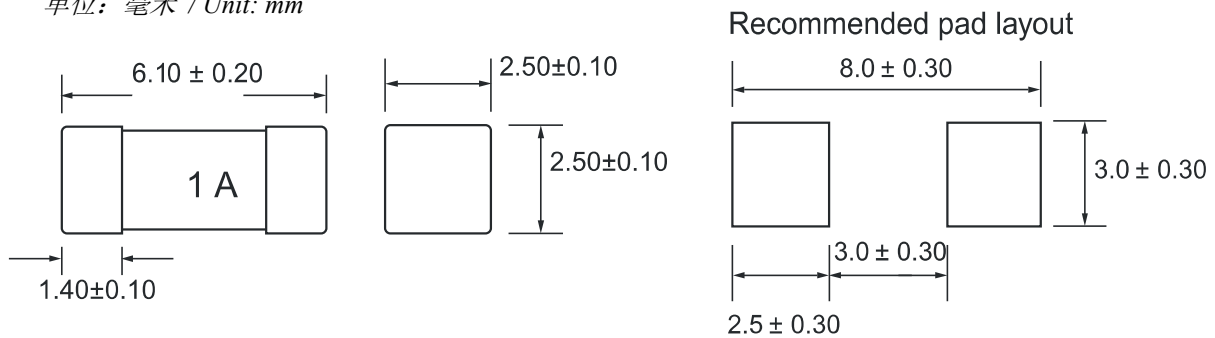

### 5. 材料明细 / Material Details

编号 NO.	零件名称 Part Name	材质 Material
①	端帽 End caps	黄铜镀金 Gold Plated Brass Cap
②	主体 Body	陶瓷管 Non-Transparent Square Ceramic Tube
③	熔丝 Fuse element	合金 Cu-Ag Alloy wire

### 6. 产品特性 / Product Characteristics

编号 NO.	项目 Item	内容 Content	参考标准 Reference standards
-----------	------------	---------------	-----------------------------

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-250V	Edition	V1
Department		Page	13 / 23

1	产品标识 Product Marking	Brand, Ampere Rating	marking standards
2	工作温度 Operating Temperature	-55°C to 125°C	IEC60068-2-1/2
3	可焊性 Solderability	T=240°C ± 5°C, t=3sec ± 0.5sec, Coverage ≥ 95%	MIL-STD-202, Method 208
4	耐焊接热 Resistance to Soldering Heat	10 sec at 260°C	MIL-STD-202, Method 210, Test condition B
5	绝缘阻抗 Insulation Resistance (after Opening)	10,000 ohms minimum	MIL-STD-202, Method 302, Test Condition A
6	热冲击 Thermal Shock	5 cycles, -65°C / +125°C, 15 minutes at each extreme	MIL-STD-202, Method 107, Test Condition B
7	机械冲击 Mechanical Shock	100G's peak for 6 milliseconds, 3cycles	MIL-STD-202, Method 213, Test I
8	振动试验 Vibration	0.03" amplitude, 10-55 Hz in 1 min. 2hrs each XYZ=6hrs	MIL-STD-202, Method 201
9	耐湿性 Moisture Resistance	10 cycles	MIL-STD-202, Method 106
10	盐雾试验 Salt Spray	5% salt solution, 48hrs	MIL-STD-202, Method 101, Test Condition B

## 7. 电气特性 / Electrical Characteristics

### 7.1 实验条件: Test Condition

所有测试环境温度为 25±5°C。

All electrical test is to be conducted with the ambient air at a temperature of 25±5°C.

### 7.2 分断能力 Interrupting Rating:

保险丝承受分断能力: 50A@250Vac, 200A@125Vac.

Breaking Capacity: 50A@250Vac, 200A@125Vac.


### 7.3 熔断时限 / Operating Characteristics

额定电流 Rated Current	额定电流的% % of Ampere Rating(In)	熔断时间 Blowing Time
-----------------------	-------------------------------------	----------------------

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-250V	Edition	V1
Department		Page	14 / 23

160mA-20A	100% * In	大于 4 小时(4 hours Min)
500mA-20A	200% * In	小于 120 秒 (120 sec Max)
160mA-400mA	210% * In	小于 120 秒 (120 sec Max)

#### 7.4 平均时间电流曲线图 / Average Time Current Curves

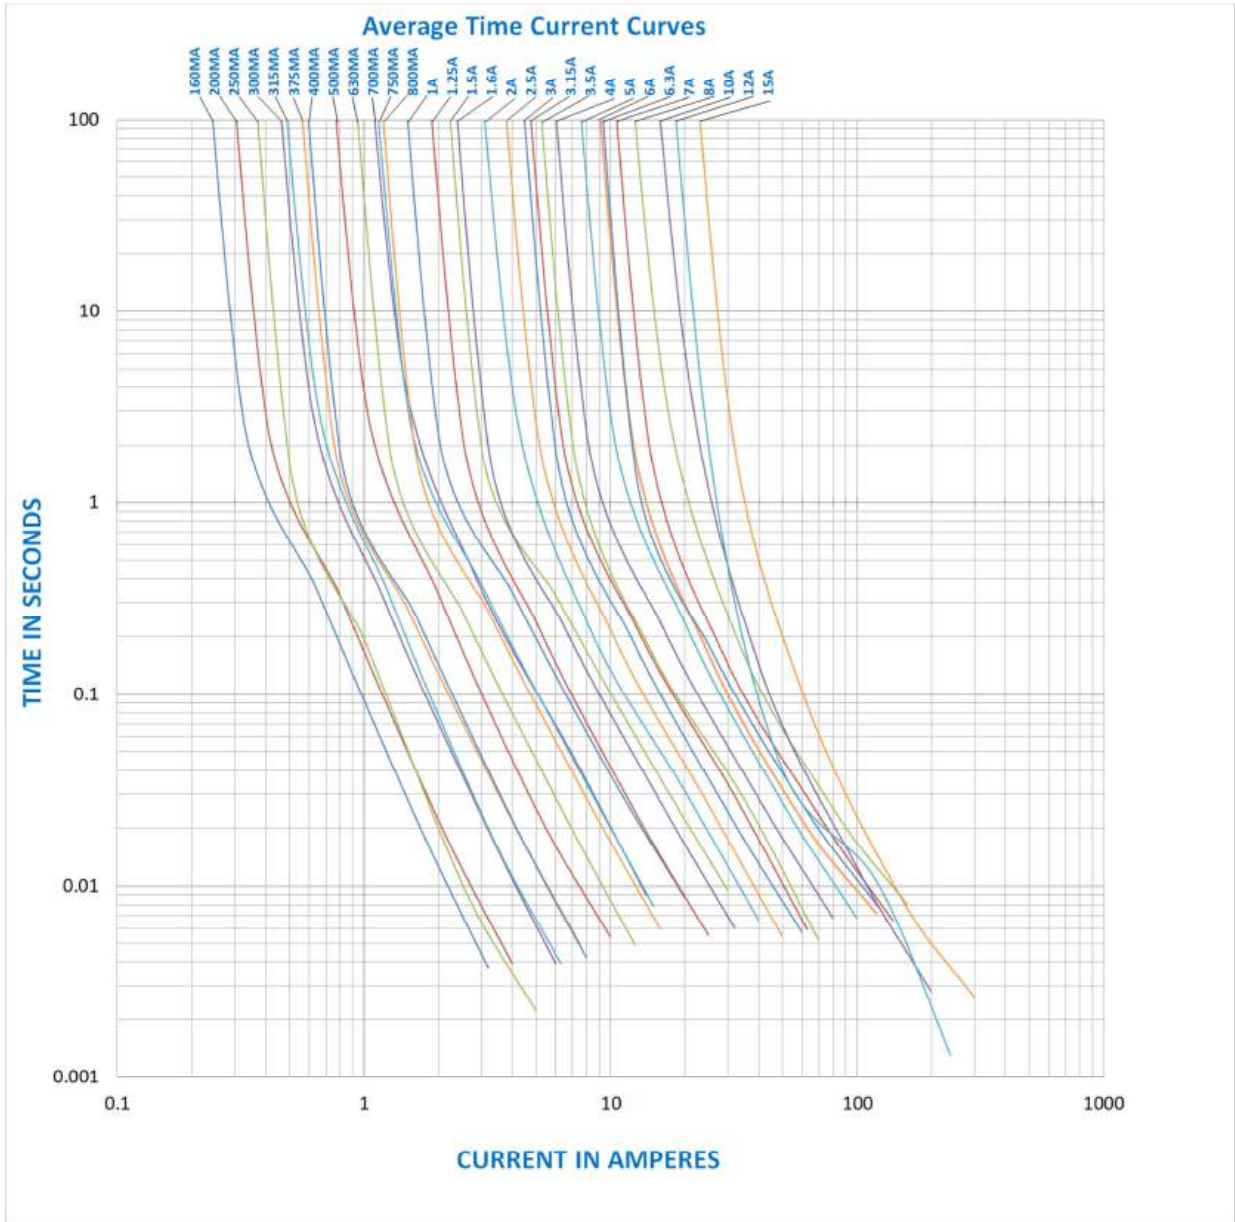


#### 8. 环境特性 / Environmental Characteristic

若操作环境温度超出  $25 \pm 5^\circ\text{C}$  范围，在选用保险丝规格时，需考虑操作环境温度对保险丝的影响，请参照如下：温度-电流曲线图。

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-250V	Edition	V1
Department		Page	15 / 23

When choosing the fuse's specification, if the operating environmental temperature beyond the scope from 20~30°C, engineer should consider the environmental temperature's affection to fuses.

Please refer: Temperature Rerating Curve:

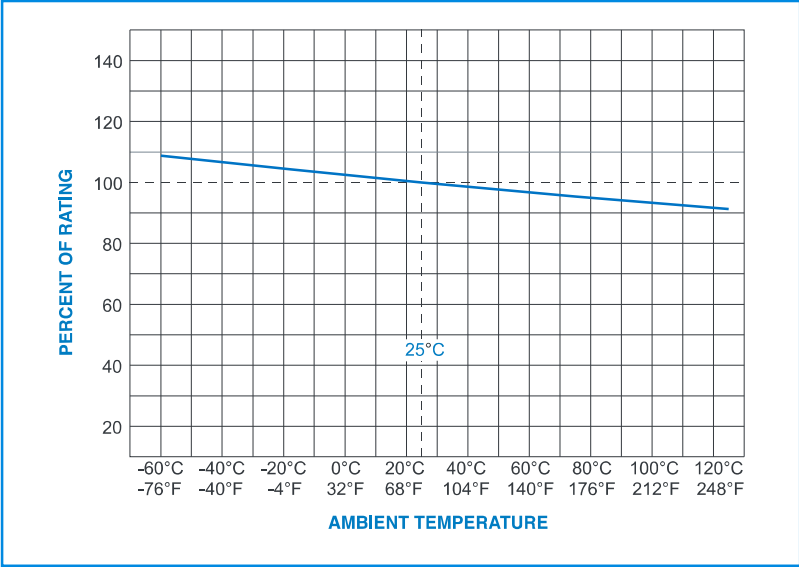


**9. 建议焊接参数 / Recommended Soldering Parameters**

**A. 波峰/回流焊参数 / Wave /Reflow Soldering Parameters:**

- 锡膏工艺 / Solder paste process.
- 锡炉温度 / Solder Pot Temperature: 260°C Max
- 焊接时间 / Solder Dwell Time: 5 seconds max

Reflow Condition		Pb-Free assembly
Average ramp-up rate (Ts(max) to Tp)		5°C /second max.
Preheat	Temperature Min (Ts(min))	150°C
	Temperature Max (Ts(max))	200°C
Time (Min to Max) (ts)		60-120 seconds
Reflow	Temperature (TL)	220°C
	Time Max (tL)	60 seconds
Peak Temperature(Tp)		260°C max
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature (Tp)		8 minutes max

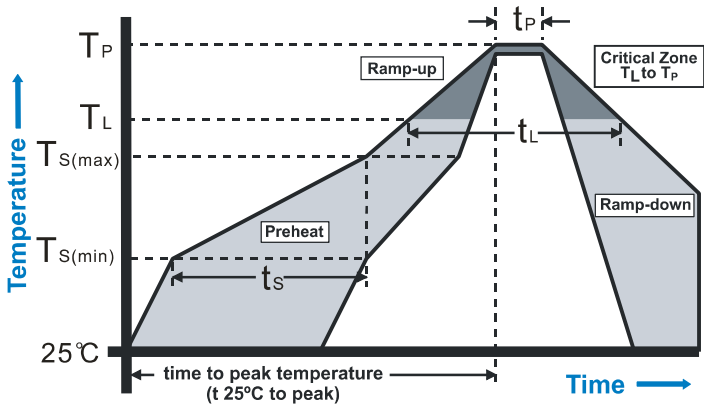

**B. 手工焊参数 / Hand-Solder Parameters:**


Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-250V	Edition	V1
Department		Page	16 / 23

烙铁温度 / Solder Iron Temperature:  $300 \pm 5^{\circ}\text{C}$


焊接时间 / Heating Time: 1~2 s Max

### 10. 包装 / Packaging

1500 个每卷/ 1,500 pcs in 7 inches dia. reel, 12mm wide tape, EIA Standard 481

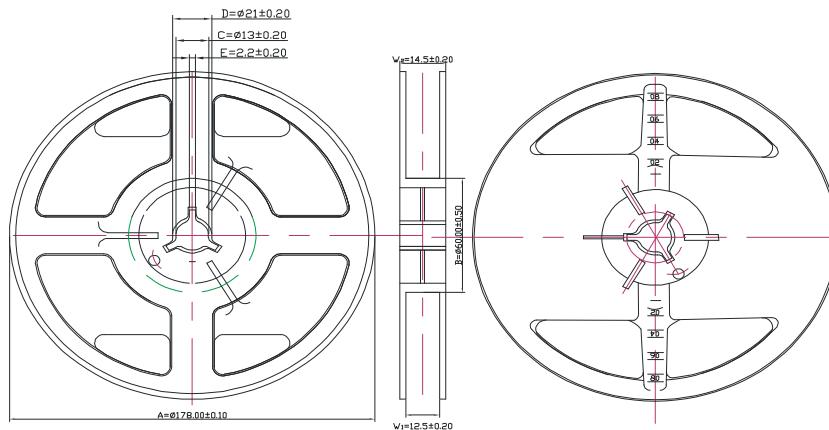

Item	A	B	C	D	E	W1	W2
Spec.(mm)	$178 \pm 0.10$	$60 \pm 0.50$	$13 \pm 0.20$	$21 \pm 0.20$	$2.2 \pm 0.20$	$12.5 \pm 0.20$	$14.5 \pm 0.20$

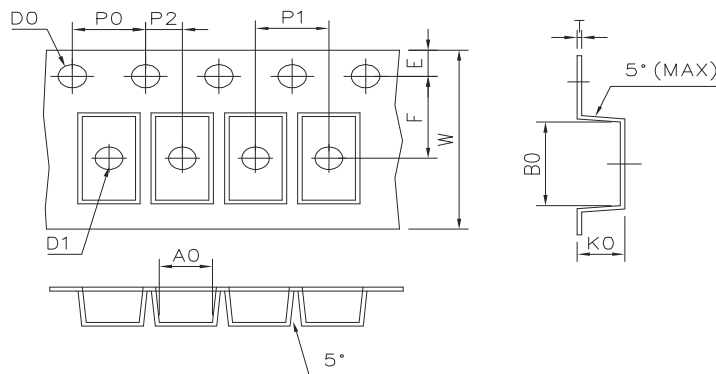

Item	$A_0$	$B_0$	$D_0$	$D_1$	$E$	$F$
Spec.(mm)	$2.70 \pm 0.10$	$6.40 \pm 0.10$	$1.50 \pm 0.10$	$1.50 \pm 0.25$	$1.75 \pm 0.10$	$5.50 \pm 0.10$
Item	$K_0$	$P_0$	$P_1$	$P_2$	$W$	$t$
Spec.(mm)	$2.70 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.10$	$12.00 \pm 0.15$	$0.25 \pm 0.05$

### 11. 其他 / Others

11.1 如果在使用中有超出本规格书的要求，须经双方协商确认。

In the event that an impropriety is found beyond this specification, it shall be fixed by mutual agreement between the parties.

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-300V	Edition	V1
Department		Page	17 / 23

## 产品特性及应用范围 / Description, Features and Applications

本产品适用于各类电子设备电路初、次级电路板的过流保护，广泛应用于固态照明、电池充电、消费电子、电子镇流器、LED AC/DC 电源供应、网络通信、医疗仪器及工业控制器等领域。

### Descriptions:

Fast-Acting square Surface Mount fuses are ceramic tube/end cap constructions, RoHS compliant, Halogen Free and lead(Pb) exempts of the requirements of RoHS Directive(2002/95/EC), with U.S. (UL/CSA) safety agency approvals. Provide board level primary and secondary circuit protection in a wide variety of applications. With excellent inrush current withstanding capability, excellent reliability for thermal and mechanic shock, also have a high reliability and stable solder ability, end caps are available in gold/silver/nickel plated.

### Features:

- Fast-Acting (Fast-Acting)
- Small size(6.1mm\*2.5mm)
- Wide range of current rating available
- Wide operating temperature range
- Low temperature de-rating
- RoHS compliant
- Tape and Reel for automatic placement
- Conflict free metals

### Applications:

- LED lighting
- Notebook PC
- Battery devices
- LCD/PDP devices
- LCD backlight inverter
- Portable Devices
- Power supply
- Networking devices
- PC server
- Cooling fan system
- Storage system
- Telecom system
- Wireless base station
- White goods
- Game console
- Office equipment
- Digital camera
- Industrial equipment
- Medical equipment
- Automotive devices

## 1. 安规认证标准及编号 / Standards and Agency Approvals

2.1 执行标准：遵循 UL 248-14。



Standards: In accordance with UL 248-14.

2.2 认证范围 Certification:

安规标准 Agency	认证范围 Ampere Range	证书编号 Agency File Number
UL	50mA ~ 7A	E340xxx(JDYxx)
cUL	50mA ~ 7A	E340xxx(JDYxx)

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-300V	Edition	V1
Department		Page	18 / 23

2.3 目录编号 Catalogue No., ● 已认证 Approved / ○ 认证中 Pending

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	分断能力 Breaking Capacity	冷阻值 Nominal Cold Resistance (Ohms)	熔化热能 I <sup>2</sup> TMelting Integral(A <sup>2</sup> .S)	安规认证 Agency Approvals			
									
25F-0160	160mA	300VAC	50A@300VAC 50A@250VAC 200A@125VAC	2.308	0.056	●	●		
25F-0200	200mA			1.655	0.060	●	●		
25F-0250	250mA			1.456	0.063	●	●		
25F-0300	300mA			0.855	0.190	●	●		
25F-0315	315mA			0.656	0.200	●	●		
25F-0375	375mA			0.605	0.328	●	●		
25F-0400	400mA			0.580	0.335	●	●		
25F-0500	500mA			0.302	0.471	●	●		
25F-0600	600mA			0.268	0.771	●	●		
25F-0630	630mA			0.259	0.982	●	●		
25F-0700	700mA			0.233	2.102	●	●		
25F-0750	750mA			0.227	2.230	●	●		
25F-0800	800mA			0.205	2.375	●	●		
25F-010	1A			0.129	3.685	●	●		
25F-013	1.25A			0.095	3.755	●	●		
25F-015	1.5A			0.089	6.751	●	●		
25F-016	1.6A			0.078	6.800	●	●		
25F-020	2A			0.039	12.140	●	●		
25F-025	2.5A			0.036	16.005	●	●		
25F-030	3A			0.028	21.550	●	●		
25F-032	3.15A			0.027	25.740	●	●		
25F-035	3.5A			0.026	30.041	●	●		
25F-040	4A			0.020	43.201	●	●		
25F-050	5A			0.015	55.240	●	●		
25F-060	6A			0.013	75.205	●	●		
25F-063	6.3A			0.011	93.540	●	●		
25F-070	7A			0.010	97.100	●	●		
25F-080	8A					0.009	102	○	○
25F-100	10A					0.007	113	○	○

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-300V	Edition	V1
Department		Page	19 / 23

## 2. 产品标示 / Product Marking

保险丝上需有下列标示 / The fuses shall have the following markings


示例 Example:



注: 对于标示的大小和位置没有规定 / Note: Size and position of the markings shall not be provided.

## 3. 结构及尺寸 / Dimensions and Structure

单位: 毫米 / Unit: mm

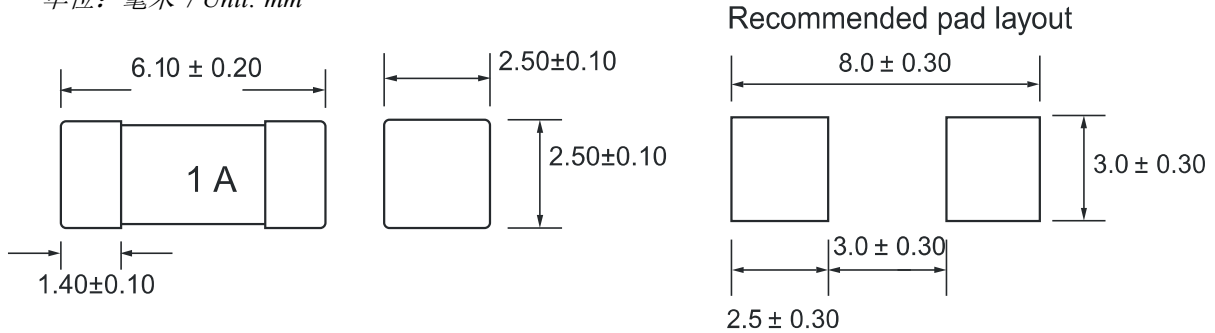

## 4. 材料明细 / Material Details

编号 NO.	零件名称 Part Name	材质 Material
①	端帽 End caps	黄铜镀金 Gold Plated Brass Cap
②	主体 Body	陶瓷管 Non-Transparent Square Ceramic Tube
③	熔丝 Fuse element	合金 Cu-Ag Alloy wire

## 5. 产品特性 / Product Characteristics

编号 NO.	项目 Item	内容 Content	参考标准 Reference standards
1	产品标识 Product Marking	Brand, Ampere Rating	marking standards
2	工作温度	-55°C to 125°C	IEC60068-2-1/2

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-300V	Edition	V1
Department		Page	20 / 23

	Operating Temperature		
3	可焊性 Solderability	T=240°C ± 5°C, t=3sec ± 0.5sec, Coverage ≥ 95%	MIL-STD-202, Method 208
4	耐焊接热 Resistance to Soldering Heat	10 sec at 260°C	MIL-STD-202, Method 210, Test condition B
5	绝缘阻抗 Insulation Resistance (after Opening)	10,000 ohms minimum	MIL-STD-202, Method 302, Test Condition A
6	热冲击 Thermal Shock	5 cycles, -65°C / +125°C, 15 minutes at each extreme	MIL-STD-202, Method 107, Test Condition B
7	机械冲击 Mechanical Shock	100G's peak for 6 milliseconds, 3cycles	MIL-STD-202, Method 213, Test I
8	振动试验 Vibration	0.03" amplitude, 10-55 Hz in 1 min. 2hrs each XYZ=6hrs	MIL-STD-202, Method 201
9	耐湿性 Moisture Resistance	10 cycles	MIL-STD-202, Method 106
10	盐雾试验 Salt Spray	5% salt solution, 48hrs	MIL-STD-202, Method 101, Test Condition B

## 6. 电气特性 / Electrical Characteristics

### 7.1 实验条件: Test Condition

所有测试环境温度为 25±5°C。

All electrical test is to be conducted with the ambient air at a temperature of 25±5°C.

### 7.2 分断能力 Interrupting Rating:

保险丝承受分断能力: 50A@250Vac, 50A@300Vac.

Breaking Capacity: 50A@250Vac, 50A@300Vac.


### 7.3 熔断时限 / Operating Characteristics

额定电流 Rated Current	额定电流的% % of Ampere Rating(In)	熔断时间 Blowing Time
160mA-7A	100% * In	大于 4 小时(4 hours Min)
500mA-7A	200% * In	小于 120 秒 (120 sec Max)

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-300V	Edition	V1
Department		Page	21 / 23

160mA-400mA      210% \* In      小于 120 秒 (120 sec Max)

#### 7.4 平均时间电流曲线图 / Average Time Current Curves

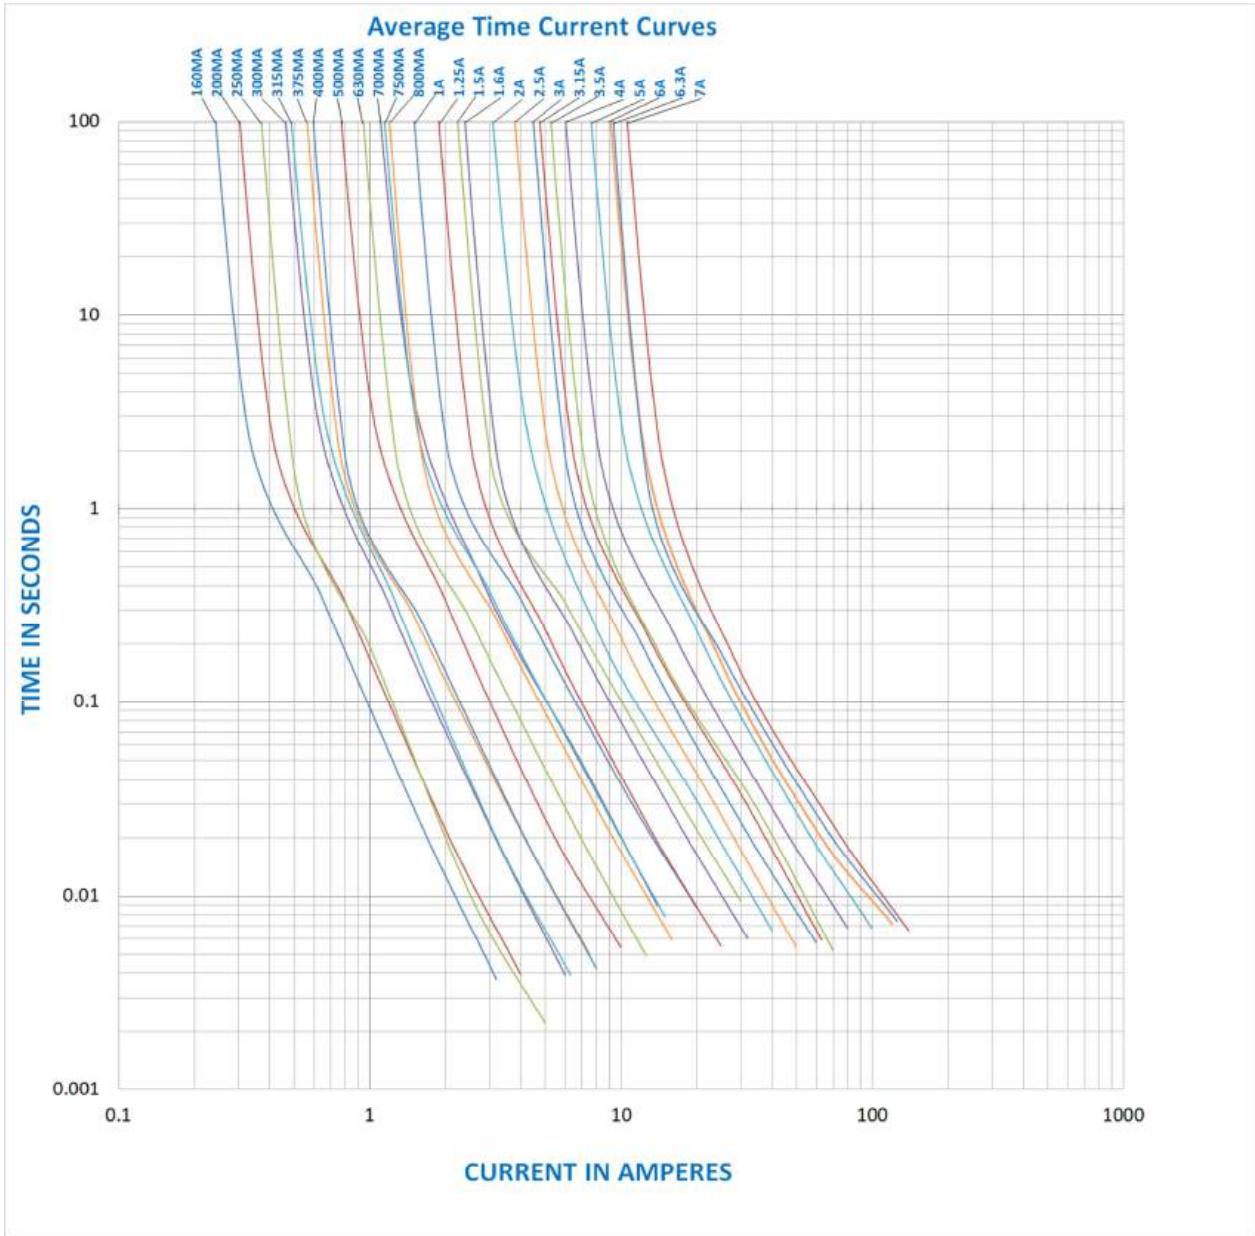


#### 7. 环境特性 / Environmental Characteristic

若操作环境温度超出  $25 \pm 5^\circ\text{C}$  范围，在选用保险丝规格时，需考虑操作环境温度对保险丝的影响，请参照如下：温度-电流曲线图。

When choosing the fuse's specification, if the operating environmental temperature beyond the scope from  $20\sim 30^\circ\text{C}$ , engineer should consider the environmental temperature's affection to fuses.

Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-300V	Edition	V1
Department		Page	22 / 23

Please refer: Temperature Rerating Curve:

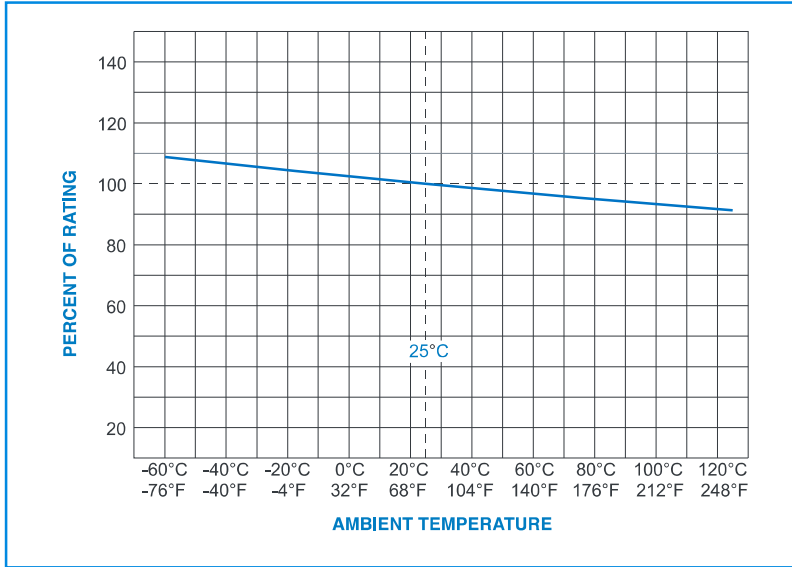

### 8. 建议焊接参数 / Recommended Soldering Parameters


#### A. 波峰/回流焊参数 / Wave /Reflow Soldering Parameters:

锡膏工艺 / Solder paste process.

锡炉温度 / Solder Pot Temperature: 260°C Max

焊接时间 / Solder Dwell Time: 5 seconds max

Reflow Condition		Pb-Free assembly
Average ramp-up rate (Ts(max) to Tp)		5°C /second max.
Preheat	Temperature Min (Ts(min))	150°C
	Temperature Max (Ts(max))	200°C
Reflow	Time (Min to Max) (ts)	60-120 seconds
	Temperature (T <sub>L</sub> )	220°C
	Time Max (t <sub>L</sub> )	60 seconds
Peak Temperature(Tp)		260°C max
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature (Tp)		8 minutes max

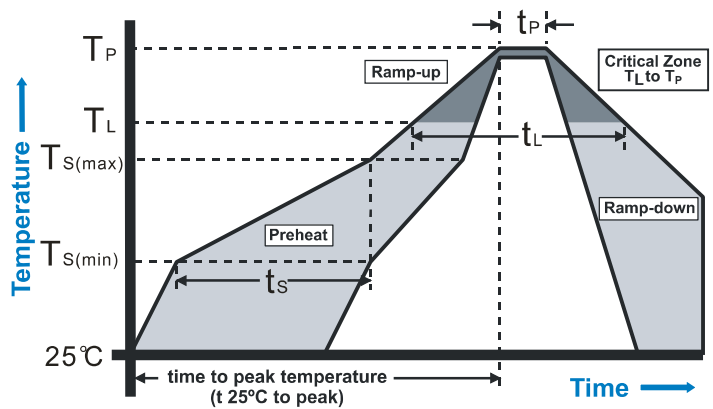

#### B. 手工焊参数 / Hand-Solder Parameters:


烙铁温度 / Solder Iron Temperature: 300 ± 5°C

焊接时间 / Heating Time: 1~2 s Max


Part name	Micro Fuses (Fast-Acting)	Date	2026-05-25
Part number	L-KLS5-2410-25F-xxxxH/L-300V	Edition	V1
Department		Page	23 / 23

## 9. 包装 / Packaging

1500 个每卷 / 1,500 pcs in 7 inches dia. reel, 12mm wide tape, EIA Standard 481

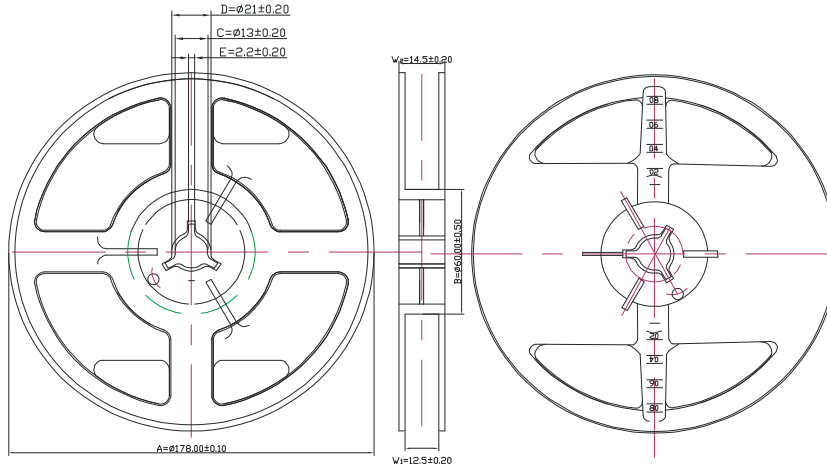

Item	A	B	C	D	E	W1	W2
Spec.(mm)	178±0.10	60±0.50	13±0.20	21±0.20	2.2±0.20	12.5±0.20	14.5±0.20

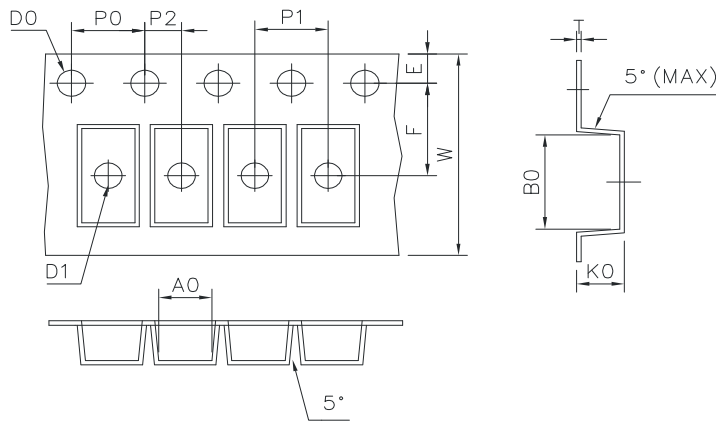

Item	A <sub>0</sub>	B <sub>0</sub>	D <sub>0</sub>	D <sub>1</sub>	E	F
Spec.(mm)	2.70±0.10	6.40±0.10	1.50±0.10	1.50±0.25	1.75±0.10	5.50±0.10
Item	K <sub>0</sub>	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	W	t
Spec.(mm)	2.70±0.10	4.00±0.10	4.00±0.10	2.00±0.10	12.00±0.15	0.25±0.05

## 10. 其他 / Others

11.1 如果在使用中有超出本规格书的要求，须经双方协商确认。

In the event that an impropriety is found beyond this specification, it shall be fixed by mutual agreement between the parties.