


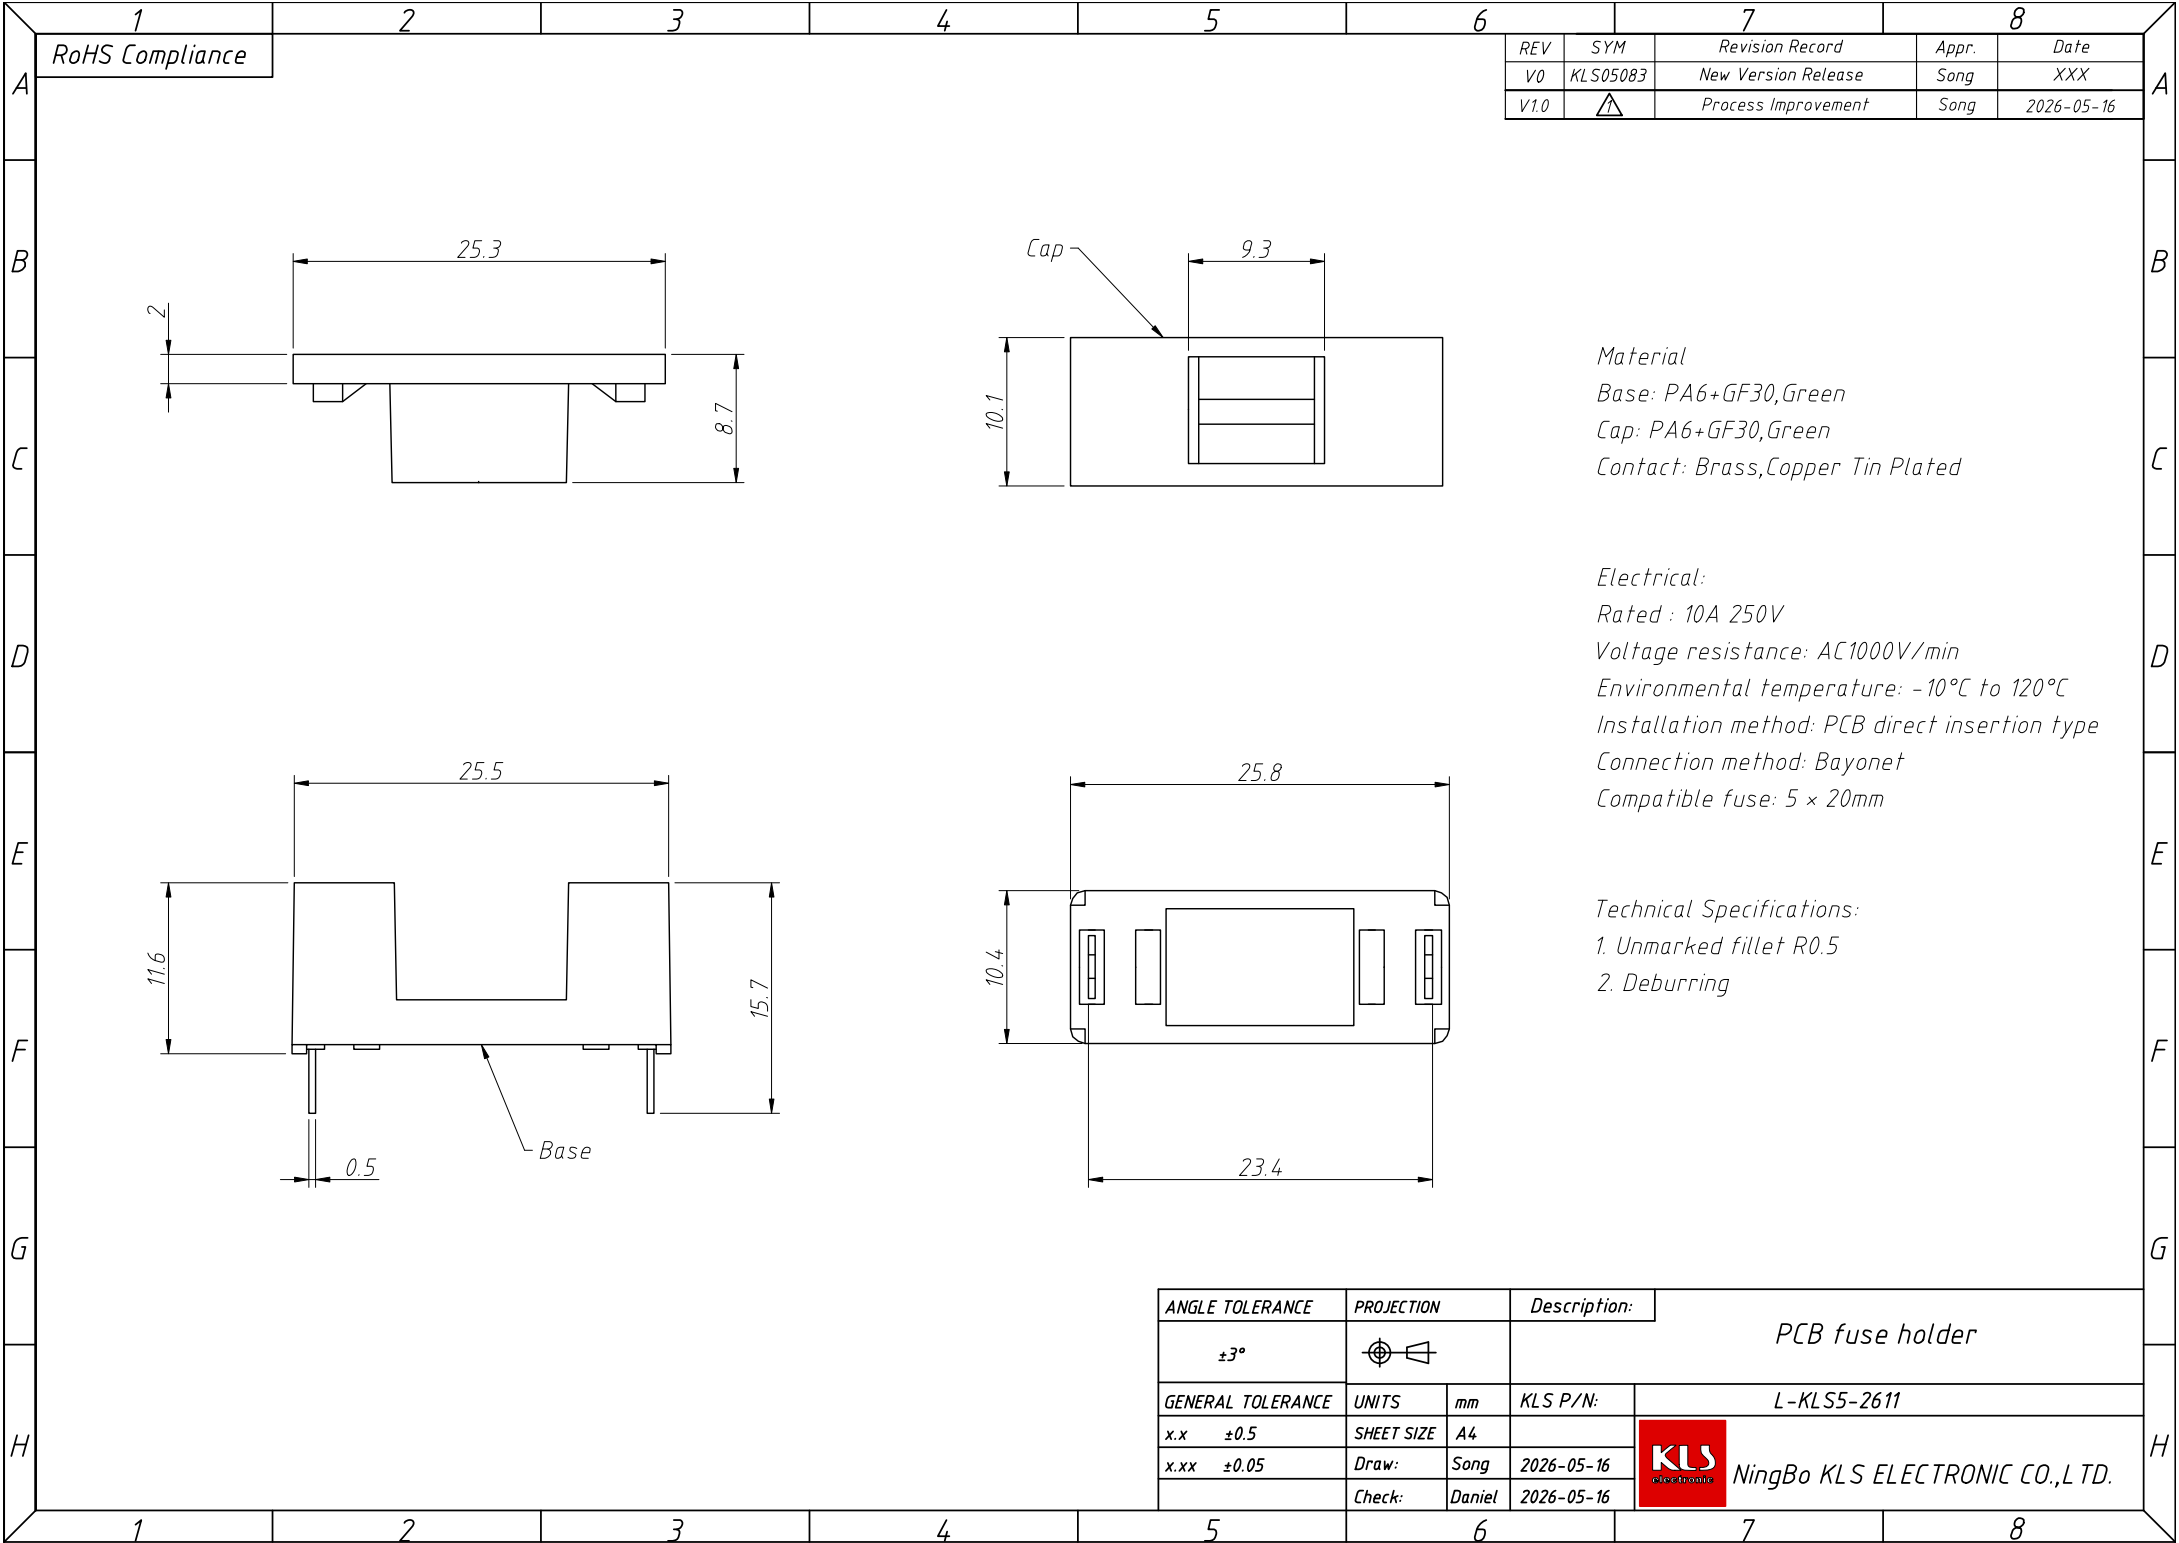

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS05083	New Version Release	Song	XXX
V1.0	△	Process Improvement	Song	2026-05-16

Material
Base: PA6+GF30,Green
Cap: PA6+GF30,Green
Contact: Brass,Copper Tin Plated

Electrical:
Rated : 10A 250V
Voltage resistance: AC1000V/min
Environmental temperature: -10℃ to 120℃
Installation method: PCB direct insertion type
Connection method: Bayonet
Compatible fuse: 5 × 20mm

Technical Specifications:
1. Unmarked fillet R0.5
2. Deburring

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				PCB fuse holder	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS5-2611
x.x	±0.5	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.
x.xx	±0.05	Draw:	Song		
		Check:	Daniel		