


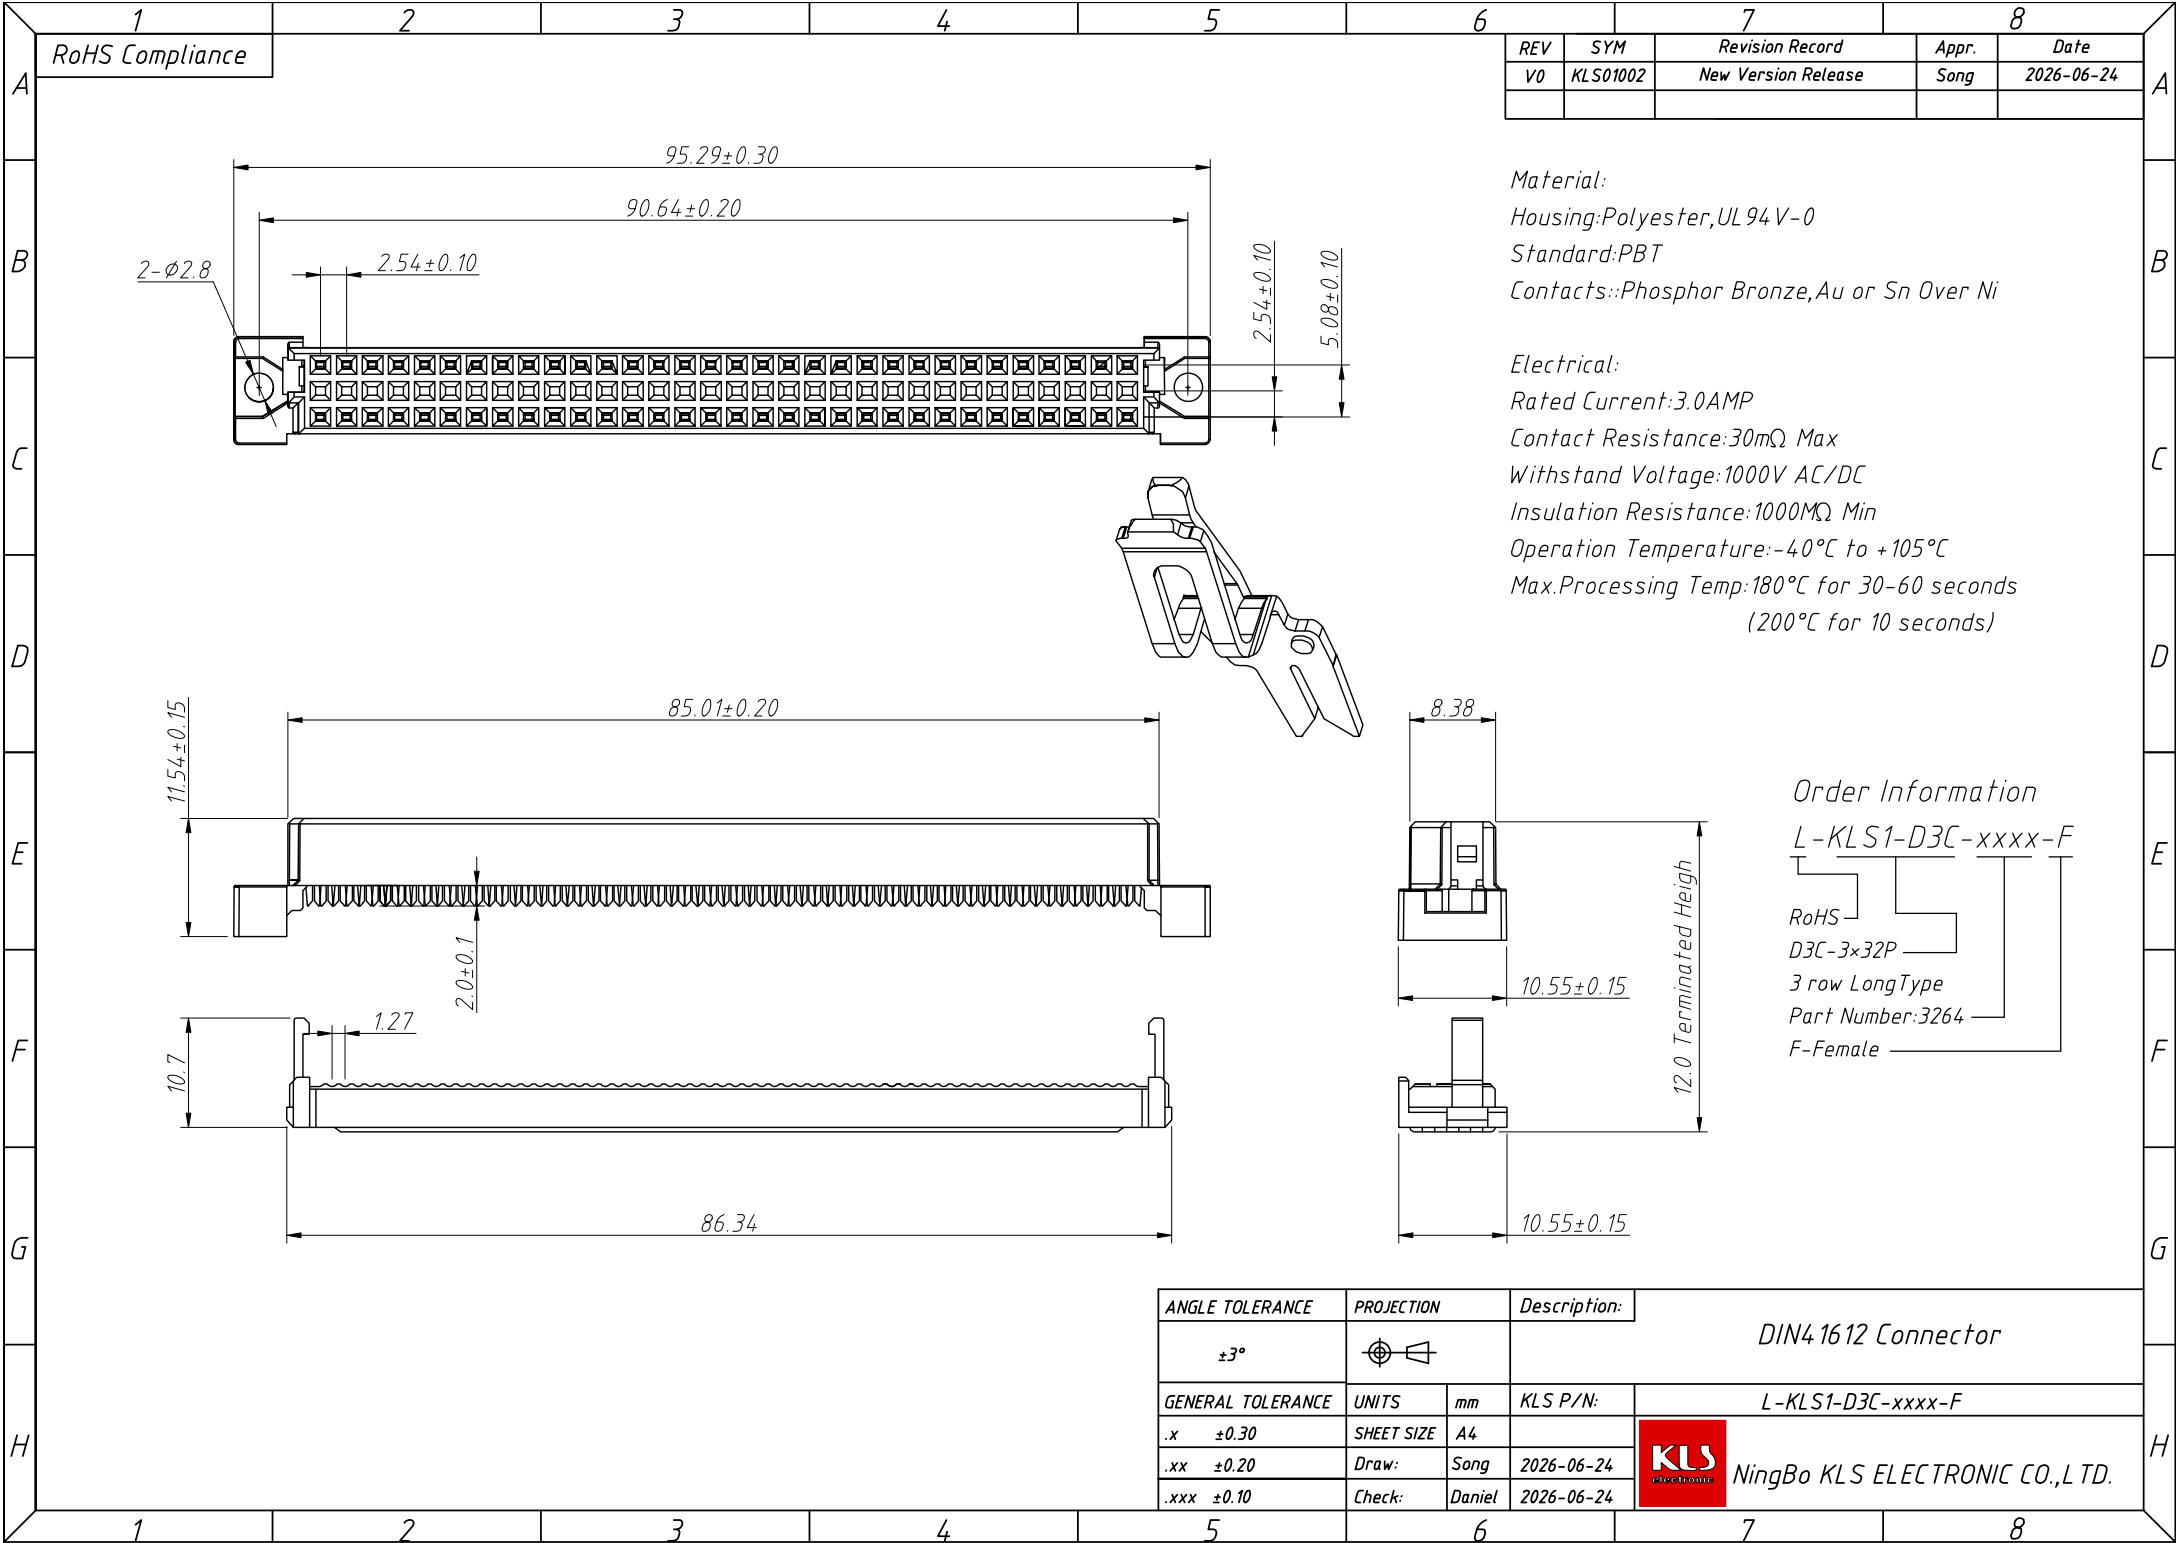

1  
RoHS Compliance

| 7   |          | 8                   |            |
|-----|----------|---------------------|------------|
| REV | SYM      | Revision Record     | Appr.      |
| V0  | KLS01002 | New Version Release | Song       |
|     |          | Date                | 2026-06-24 |

Material:  
Housing:Polyester,UL 94 V-0  
Standard:PBT  
Contacts::Phosphor Bronze,Au or Sn Over Ni

Electrical:  
Rated Current:3.0AMP  
Contact Resistance:30mΩ Max  
Withstand Voltage:1000V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40℃ to +105℃  
Max.Processing Temp:180℃ for 30-60 seconds  
(200℃ for 10 seconds)

Order Information  
L-KLS1-D3C-xxxx-F  
RoHS  
D3C-3x32P  
3 row LongType  
Part Number:3264  
F-Female

| ANGLE TOLERANCE   |  | PROJECTION |        | Description:       |                                 |
|-------------------|--|------------|--------|--------------------|---------------------------------|
| $\pm 3^\circ$     |  |            |        | DIN41612 Connector |                                 |
| GENERAL TOLERANCE |  | UNITS      | mm     | KLS P/N:           |                                 |
| .x $\pm 0.30$     |  | SHEET SIZE | A4     | L-KLS1-D3C-xxxx-F  |                                 |
| .xx $\pm 0.20$    |  | Draw:      | Song   | 2026-06-24         | NingBo KLS ELECTRONIC CO.,L TD. |
| .xxx $\pm 0.10$   |  | Check:     | Daniel | 2026-06-24         |                                 |