

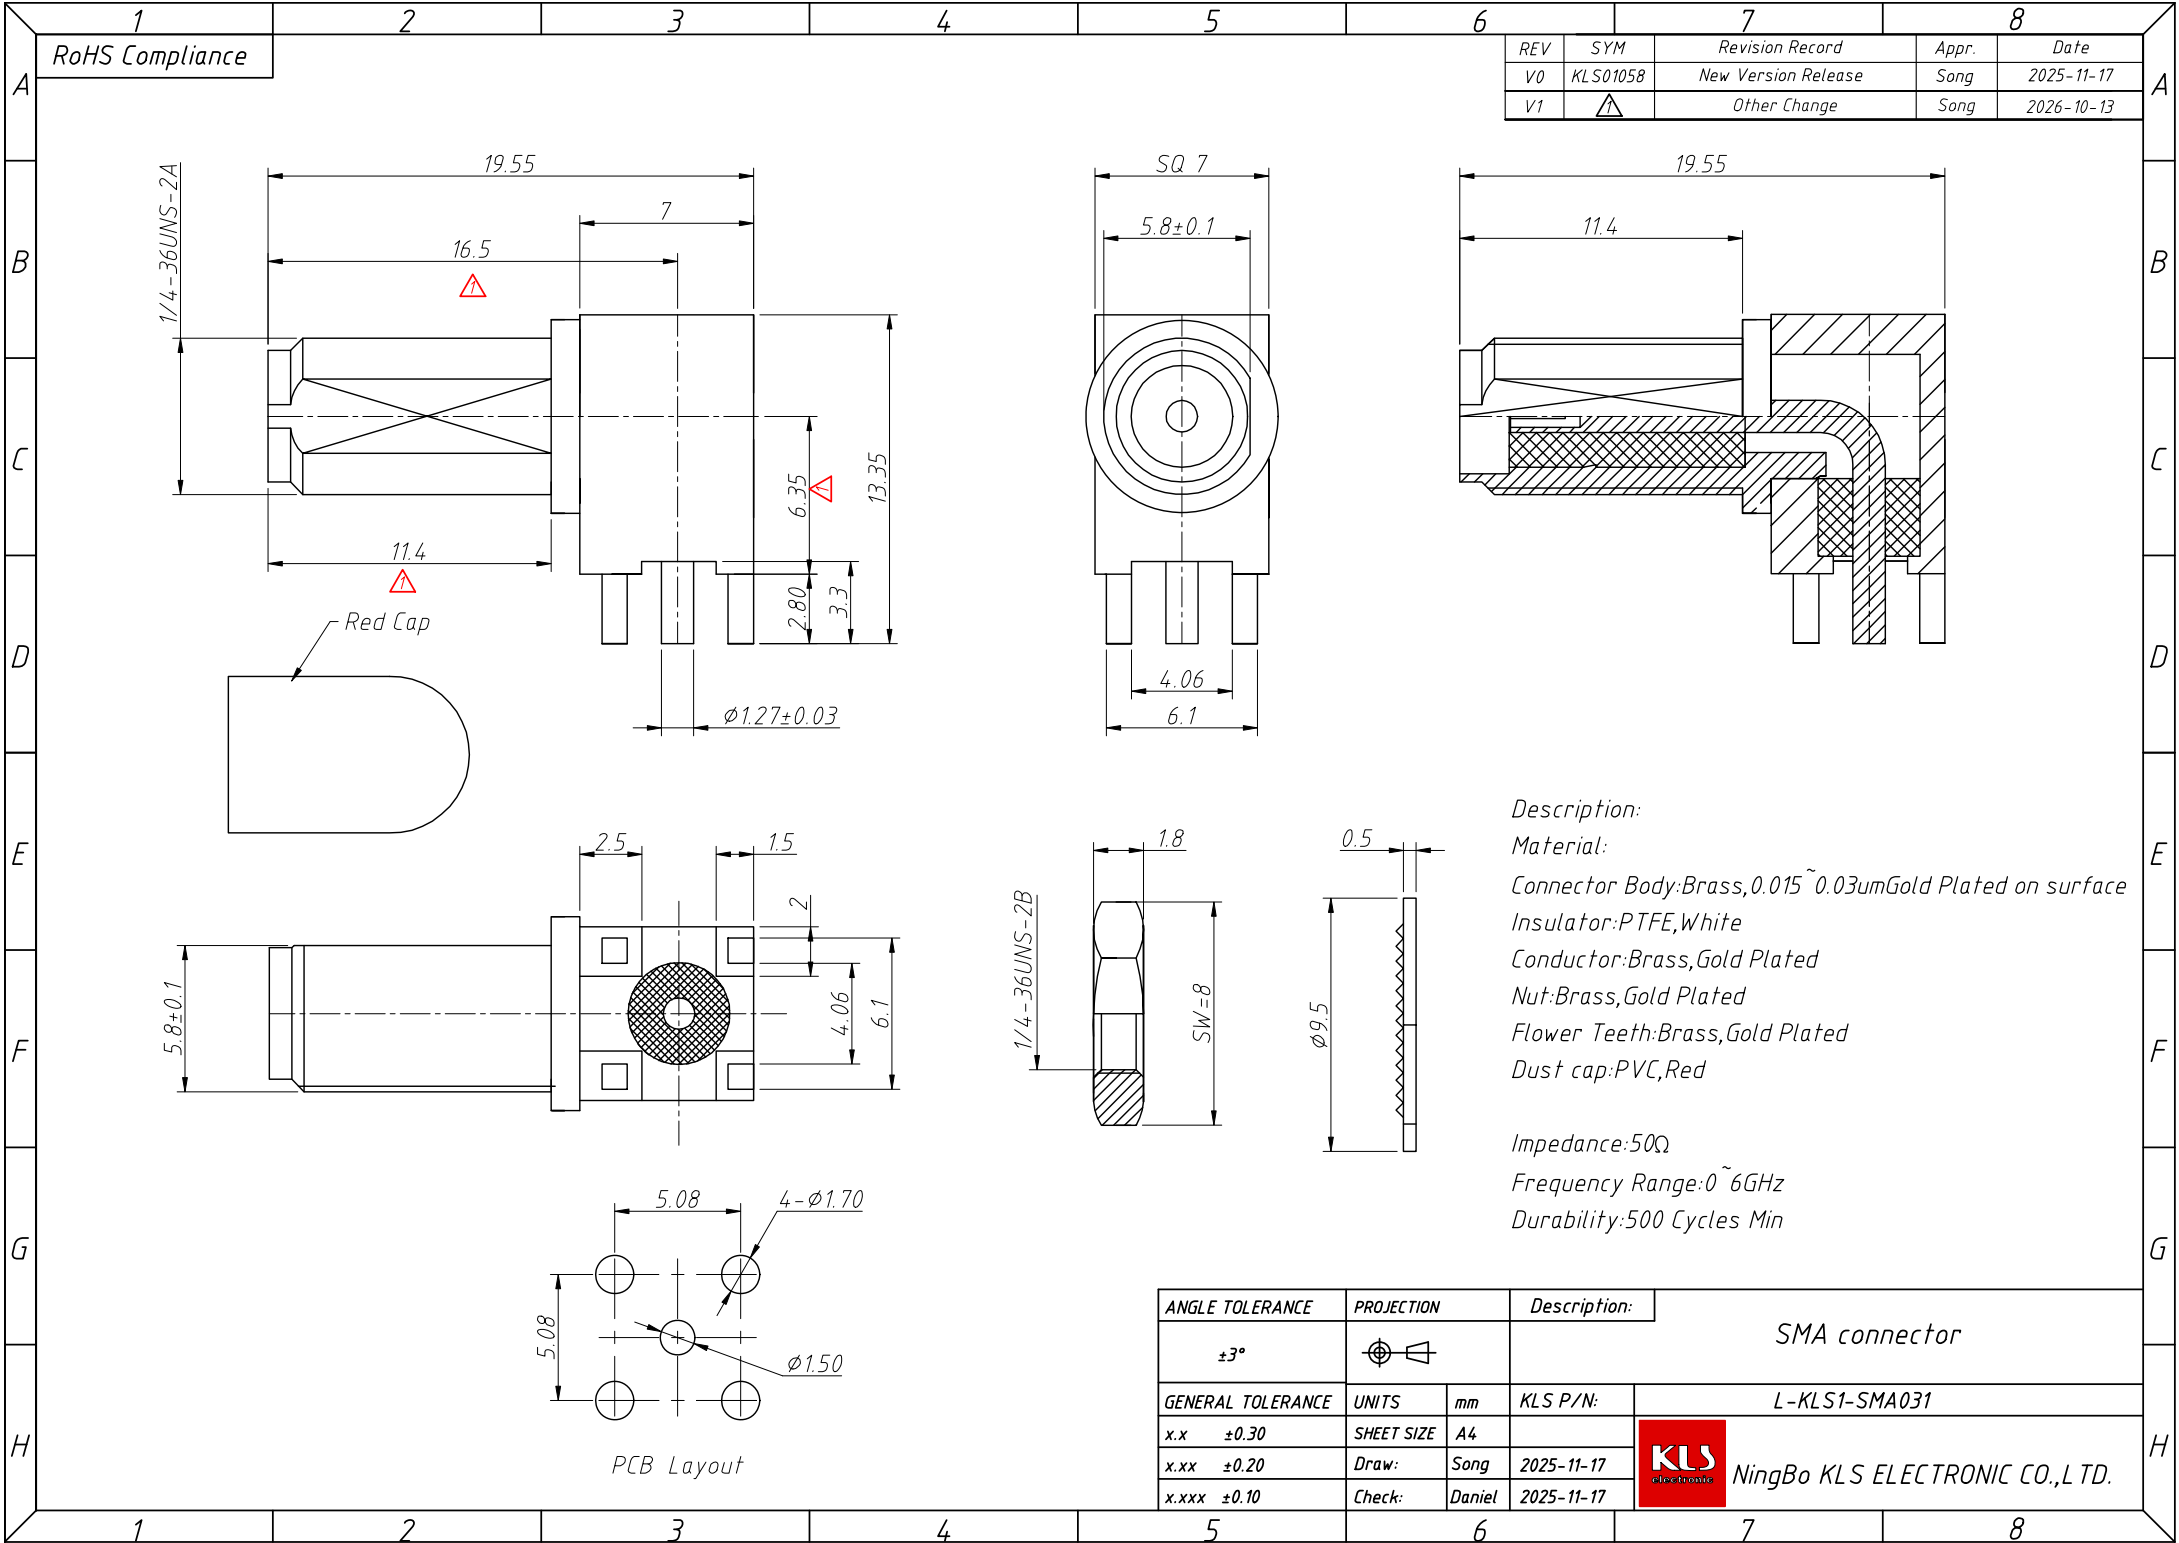
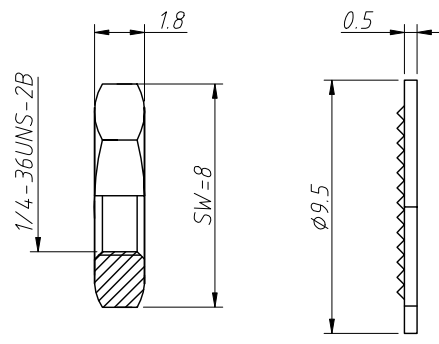
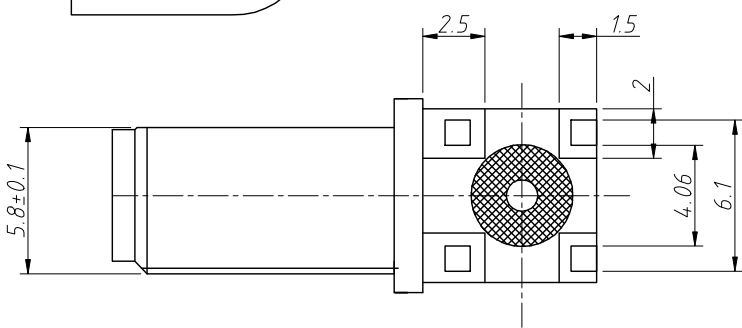
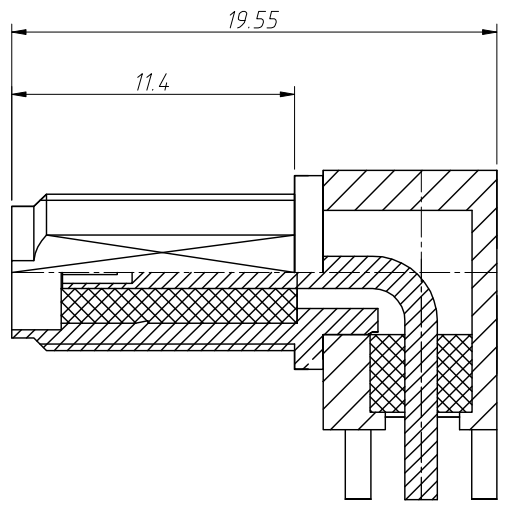


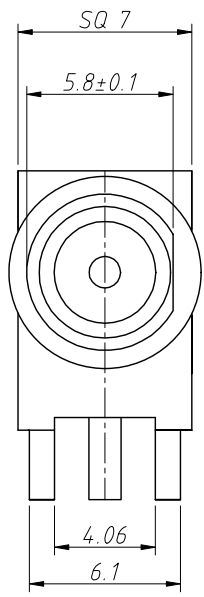


RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01058	New Version Release	Song	2025-11-17
V1	△	Other Change	Song	2026-10-13

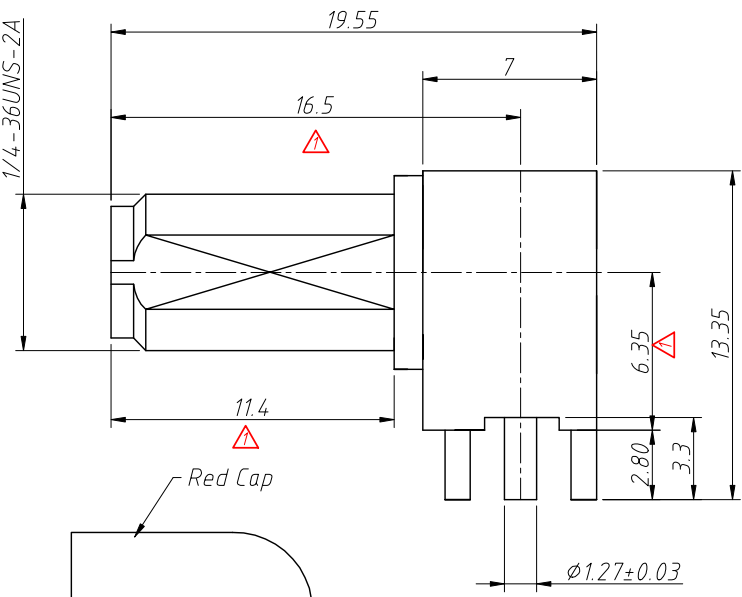

Description:
Material:
Connector Body:Brass,0.015~0.03umGold Plated on surface
Insulator:PTFE,White
Conductor:Brass,Gold Plated
Nut:Brass,Gold Plated
Flower Teeth:Brass,Gold Plated
Dust cap:PVC,Red

Impedance:50Ω
Frequency Range:0~6GHz
Durability:500 Cycles Min



PCB Layout

ANGLE TOLERANCE	PROJECTION	Description:			
±3°		SMA connector			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-SMA031	
x.x ±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,LTD.	
x.xx ±0.20	Draw:	Song	2025-11-17		
x.xxx ±0.10	Check:	Daniel	2025-11-17		