


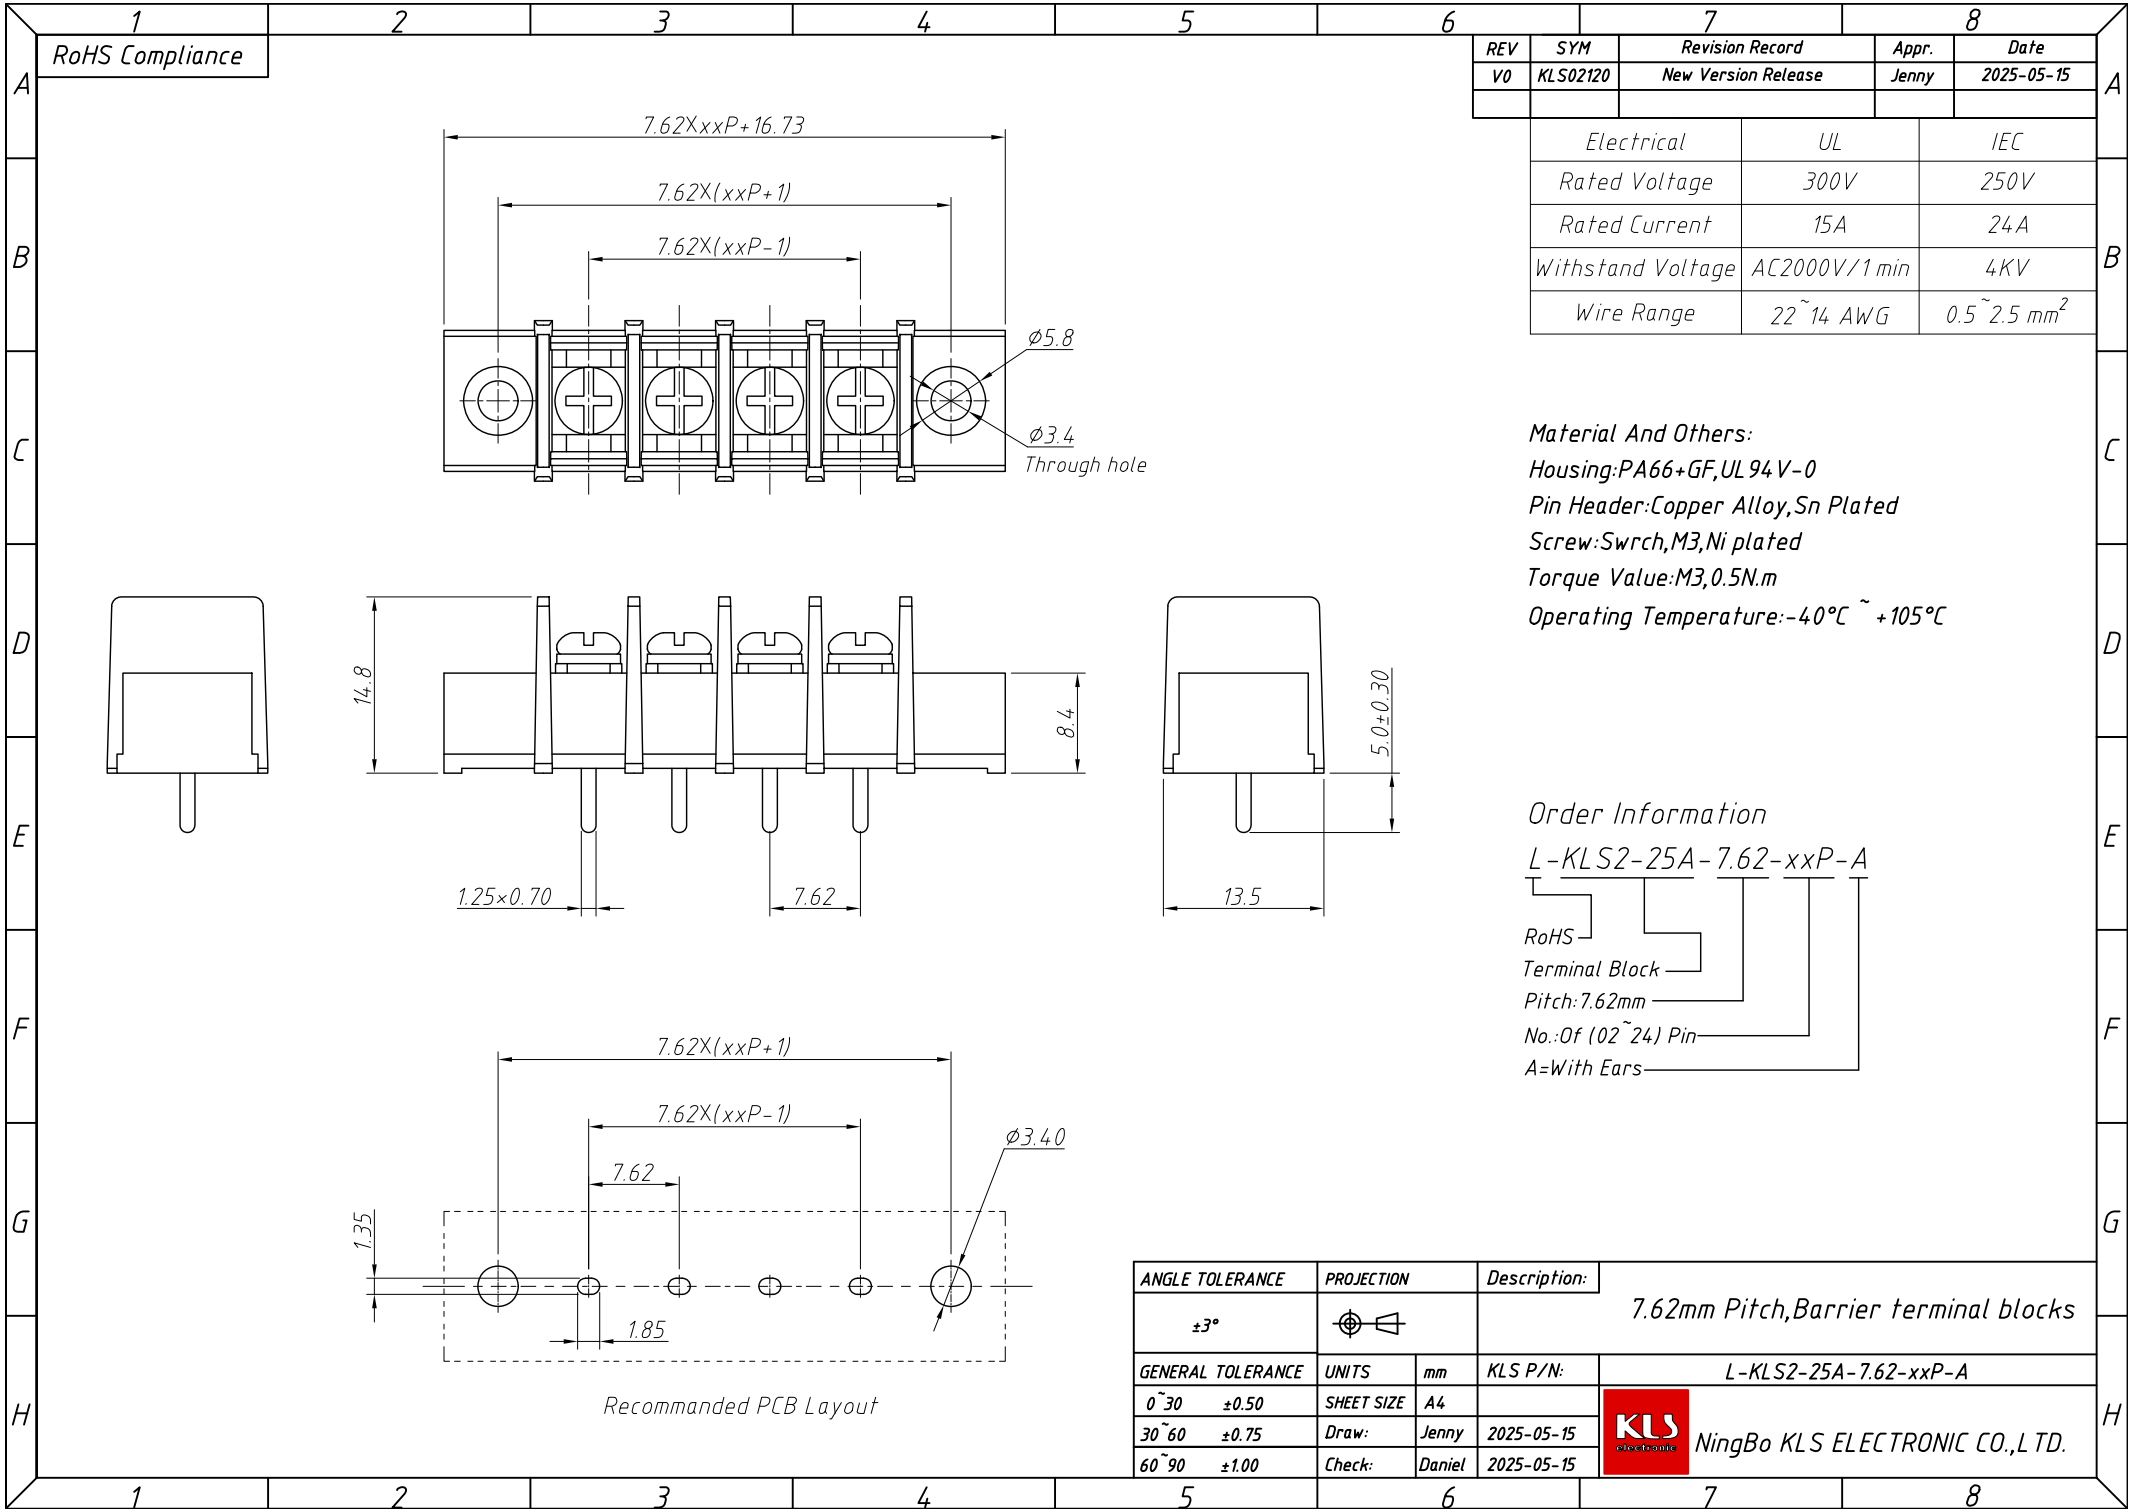


1
RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02120	New Version Release	Jenny	2025-05-15
	Electrical	UL	IEC	
	Rated Voltage	300V	250V	
	Rated Current	15A	24A	
	Withstand Voltage	AC2000V/1 min	4KV	
	Wire Range	22~14 AWG	0.5~2.5 mm ²	

Material And Others:
Housing:PA66+GF,UL 94 V-0
Pin Header:Copper Alloy,Sn Plated
Screw:Swrch,M3,Ni plated
Torque Value:M3,0.5N.m
Operating Temperature:-40℃ ~ +105℃

Order Information

L-KLS2-25A-7.62-xxP-A



Recommended PCB Layout

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				7.62mm Pitch,Barrier terminal blocks	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS2-25A-7.62-xxP-A
0~30	±0.50	SHEET SIZE	A4		
30~60	±0.75	Draw:	Jenny	2025-05-15	
60~90	±1.00	Check:	Daniel	2025-05-15	



NingBo KLS ELECTRONIC CO.,L TD.