


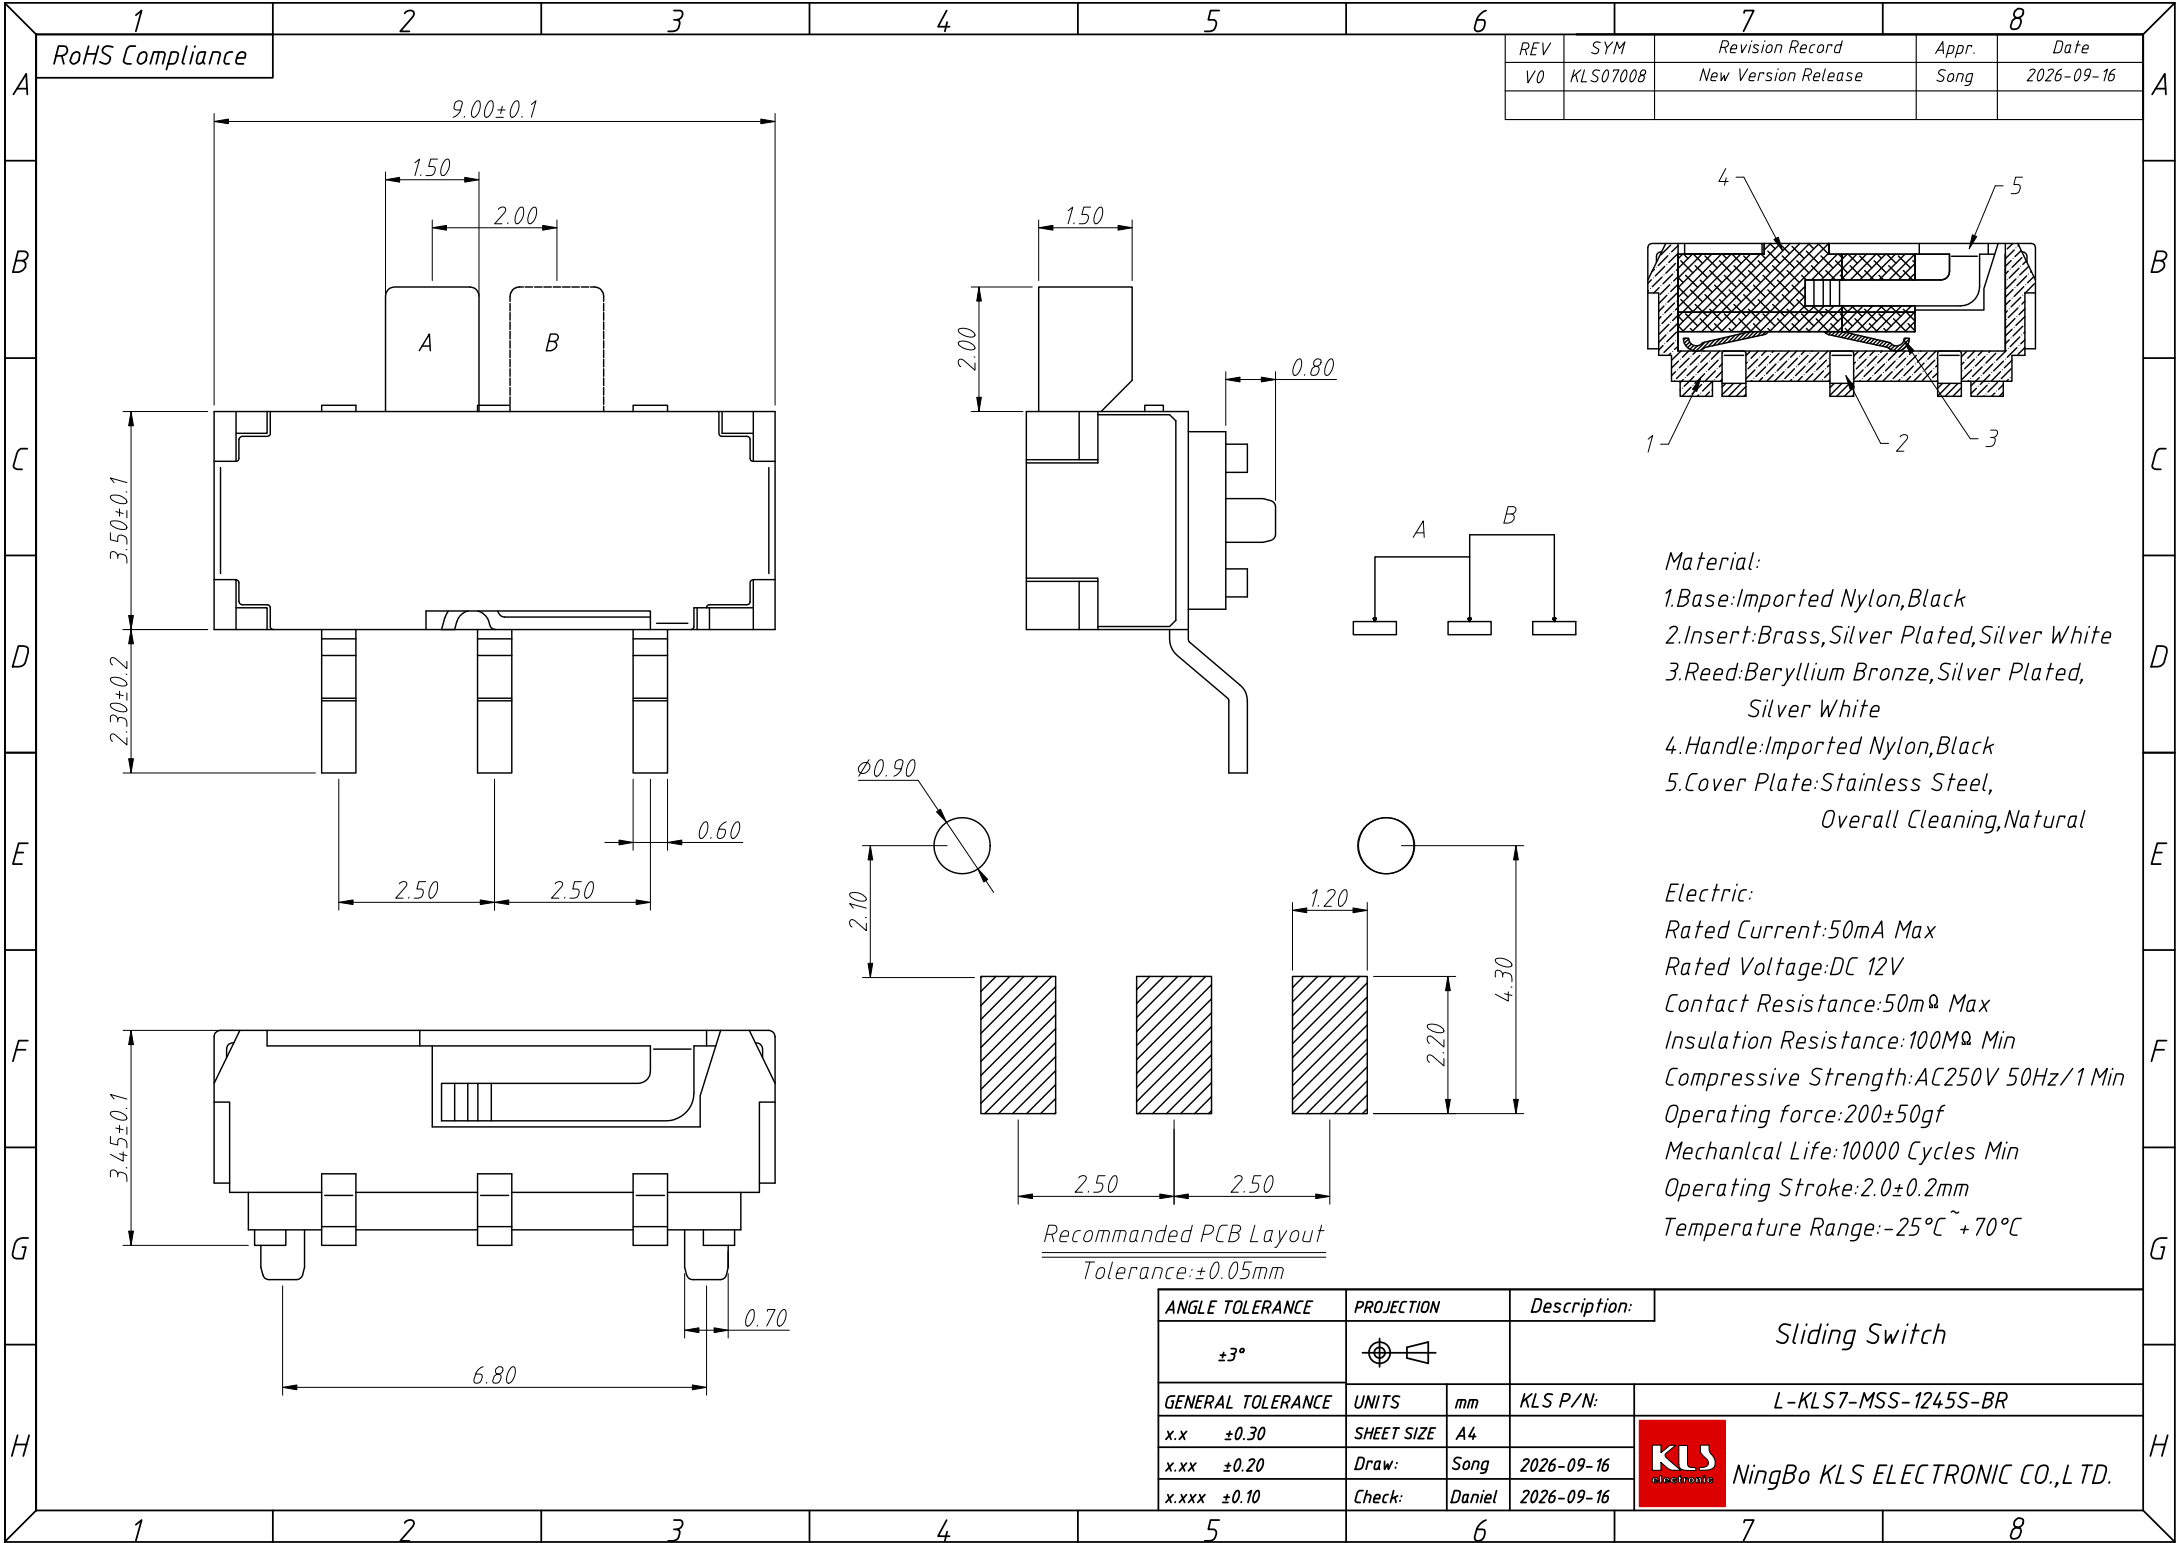

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS07008	New Version Release	Song	2026-09-16

Material:

- 1.Base:Imported Nylon,Black
- 2.Insert:Brass,Silver Plated,Silver White
- 3.Reed:Beryllium Bronze,Silver Plated, Silver White
- 4.Handle:Imported Nylon,Black
- 5.Cover Plate:Stainless Steel, Overall Cleaning,Natural

Electric:

- Rated Current:50mA Max
- Rated Voltage:DC 12V
- Contact Resistance:50mΩ Max
- Insulation Resistance:100MΩ Min
- Compressive Strength:AC250V 50Hz/1 Min
- Operating force:200±50gf
- Mechanical Life:10000 Cycles Min
- Operating Stroke:2.0±0.2mm
- Temperature Range:-25℃~+70℃

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Sliding Switch
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Song
x.xxx ±0.10	Check:	Daniel

NingBo KLS ELECTRONIC CO.,LTD.