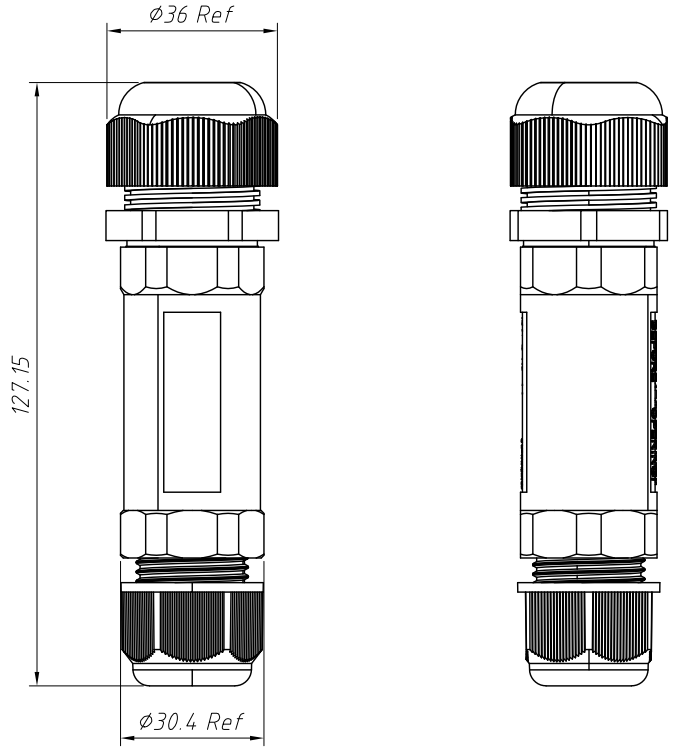
RoHS Compliance

REV	Revision Record	Appr.	Date
V0	New Version Release	WuHao	2026-10-23



Material:
Housing:PA66,UL94V-0
IP rating:IP68
Number of poles:2P/3P/4P/5P


Electrical:
Rated current:32A
Rated voltage:AC 450V
Withstand voltage: AC 2500V
Wire section:0.5~4mm^2
Operating temperature:-40°C~+105°C
Certification:RoHS / CQC / CE

Order Information:


L-KLS15-WEC05A-M25-xx-x


- L: RoHS Waterproof connectors
- Serial Number
- M25 Waterproof Circular Connectors
- Number of poles
- Line diameter range:


A-5~9mm B-9~12mm C-10~14mm




Ø14.5mm	Ø10-14mm
Ø12mm	Ø9-12mm
Ø8.5mm	Ø5-9mm
Rubbers Diameter D	Outer Cable Diameter


2P


3P


4P


5P

ANGLE TOLERANCE	PROJECTION		Description:	M25 Waterproof Circular Connectors
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS15-WEC05A-M25-xx-x
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	WuHao	2026-10-23	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2026-10-23	