
RoHS Compliance


REV	Revision Record	Appr.	Date
V0	New Version Release	Jenny	2024-06-18


2Pin Connector




Earth Wire No Copper

3Pin Connector



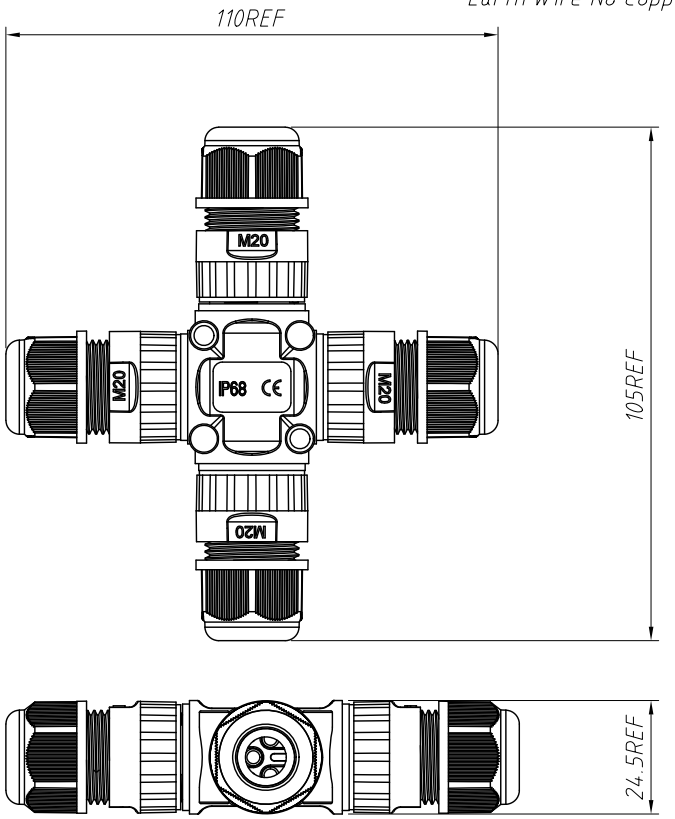

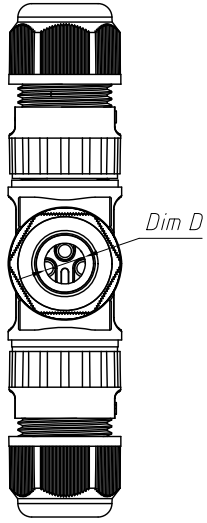

ø14.5mm	ø10-14mm
ø12mm	ø9-12mm
ø8.5mm	ø5-9mm
Rubbers Diameter D	Outer Cable Diameter

Material:
Housing:PA66,UL94V-0,Black
Contact:Copper Alloy,Nickel plated
IP rating:IP68
Number of poles:02P/03P

Electrical:
Rated current:24A
Rated voltage:AC 450V
Withstand voltage: AC 2500V
Wire section:0.5~2.5mm^2
Operating temperature:-40°C~+105°C
Certification:CQC/RoHS/CE

Order Information:
L-KLS15-WEC09-M20-xx-x

- L: RoHS Waterproof connectors
- Serial Number
- M20 Waterproof Circular Connectors
- Number of poles
- Line diameter range:

A-5~9mm B-9~12mm C-12~14mm

ANGLE TOLERANCE	PROJECTION		Description:	M20 Waterproof Circular Connectors, IP68,Screw locking type
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS15-WEC09-M20-xx-x
x. ±0.35	SHEET SIZE	A4		
x.x ±0.20	Draw:	Jenny	2024-06-18	NingBo KLS ELECTRONIC CO.,LTD.
x.xx ±0.10	Check:	Daniel	2024-06-18	