

RoHS Compliance


REV	SYM	Revision Record	Appr.	Date
V0	KLS01149	New Version Release	Song	2025-03-28
V1.0	KLS01149	Other Change	WuHao	2026-09-23

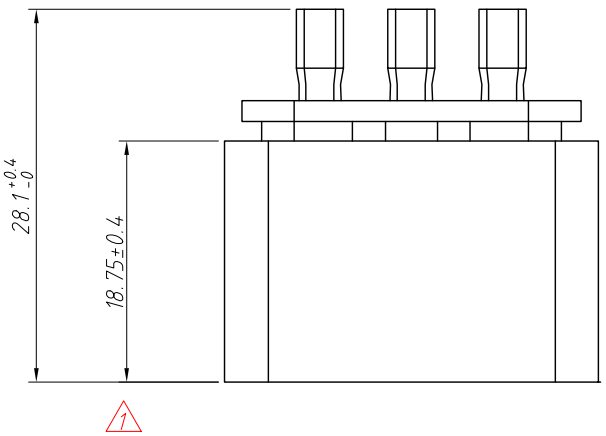


Material:
Grounding pin:Brass, T=2.0
Current-Carrying pin:Brass, T=2.0mm
Base:PA66,UL 94 V-0

Electric:
Rating:10A 250V AC
Insert And Extract Force:1.36kgf ~6.8kgf
Terminal Strength:80N Min
Operating Life:5000 Cycles Min
Withstand Voltage:
Between All Terminals:2500VAC (50-60Hz)1min
Terminals to Base:3750V AC (50-60Hz)1min
Leakage Current:1mA
Insulation Resistance:100MΩ Min 500V DC

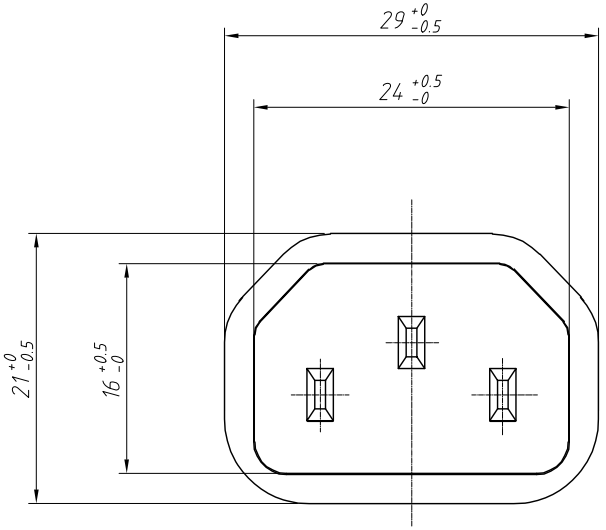

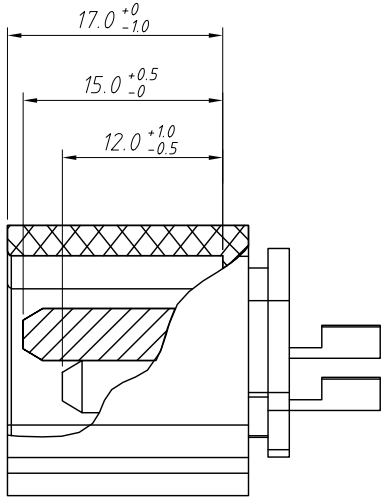

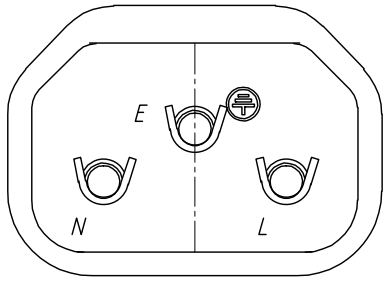

ANGLE TOLERANCE	PROJECTION		Description:	AC Outlet
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-AS-302-22
.x ±0.30	SHEET SIZE	A4		
.xx ±0.20	Draw:	Song	2025-03-28	NingBo KLS ELECTRONIC CO.,LTD.
.xxx ±0.10	Check:	Daniel	2025-03-28	