



RoHS Compliance


REV	SYM	Revision Record	Appr.	Date
V0	KLS01149	New Version Release	WuHao	2026-01-22
V1.0	KLS01149	Specifications Change	WuHao	2026-10-21

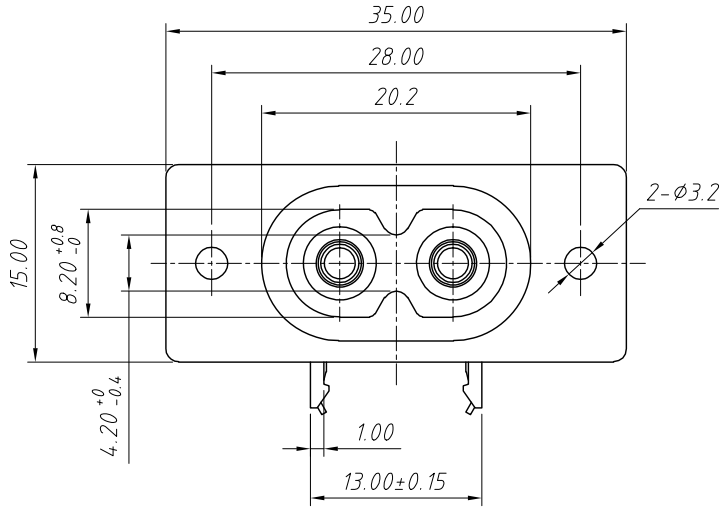

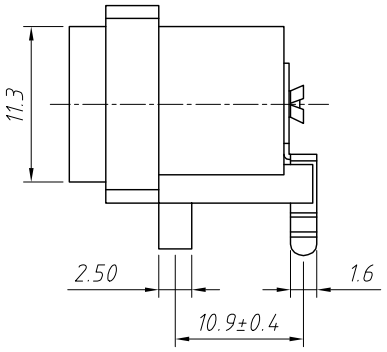

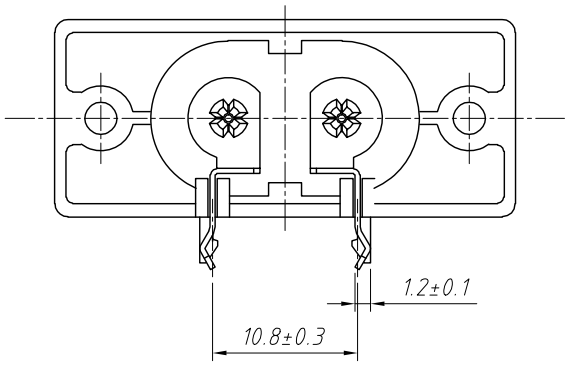


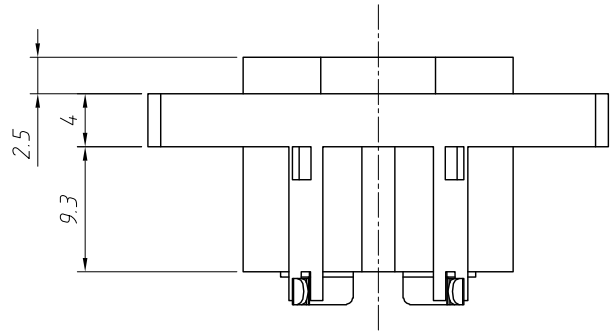

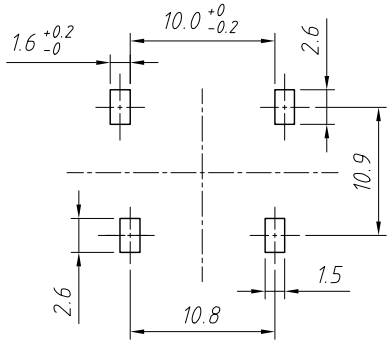

Recommanded PCB Layout

Tolerance:±0.05mm

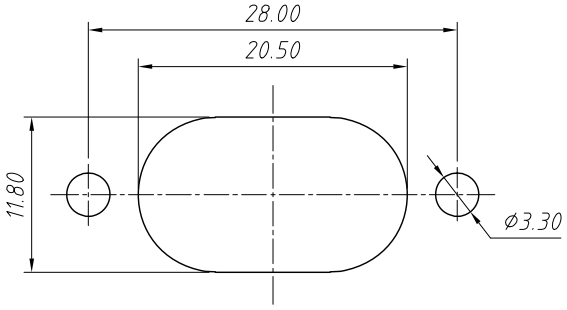

Panel Cut-Out

Electric:

Standard:IEC 60320-1

GB/T 17465.1

1

Rating:7A 125V AC UL cUL

2.5A 250V AC ENEC 3C KC

Withstand Voltage:Between All Terminals:2500VAC (50-60Hz) 1min

Terminals to Base:3750V AC (50-60Hz) 1min

Leakage Current:1mA

Insulation Resistance:100MΩ Min 500V DC

Glow-Wire Tep:750°C

Material:

Round Pin:Brass Rod

Base:PA66

Terminal:Brass, T=0.4mm

ANGLE TOLERANCE	PROJECTION		Description:	AC Outlet
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-AS-222-13
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	WuHao	2026-01-22	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2026-01-22	