

RoHS Compliance

REV	Revision Record	Appr.	Date
V0	New Version Release	WuHao	2026-05-19
V1.0	Specifications Change	WuHao	2026-11-03

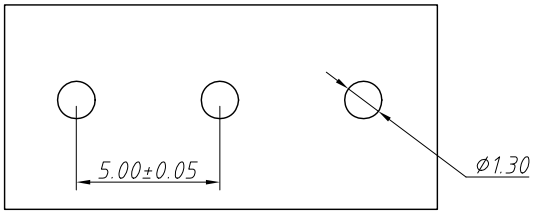

Recommanded PCB Layout

Tolerance:±0.05mm

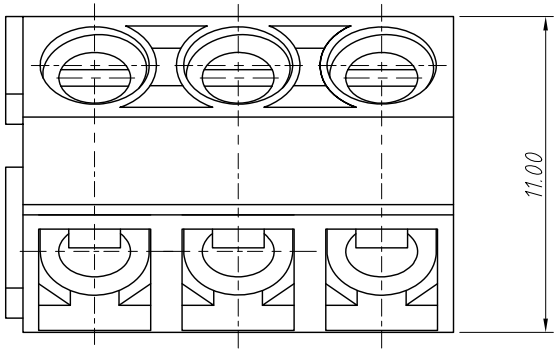

Material:

Noumenon:PA66,UL 94 V-0

Screw:Steel,Coated With trivalent blue zinc

Square Buckle:Brass,Tin Plated

Shrapnel:Stainless steel

Electrical

Voltage Rating:250VAC

Current Rating: 10 A


Insulation Resistance:500MΩ/ DC 500V


Withstanding Voltage:AC 2500V /1min

Wire Range: 18-12 AWG

Stripping Length:5~6 mm

Operating Temperature: -33°C to +120°C

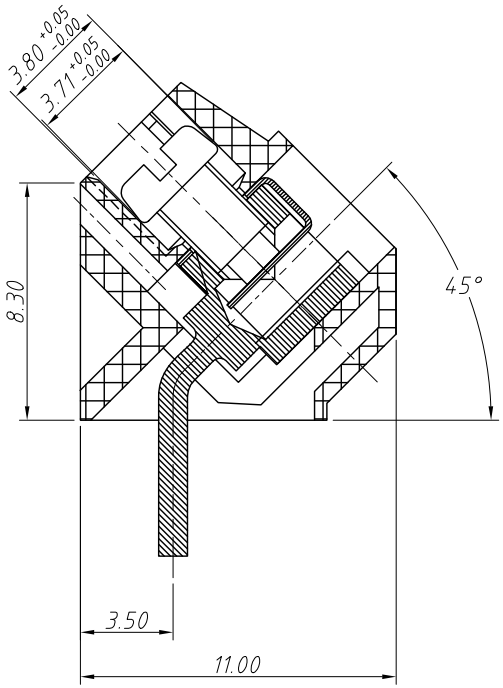


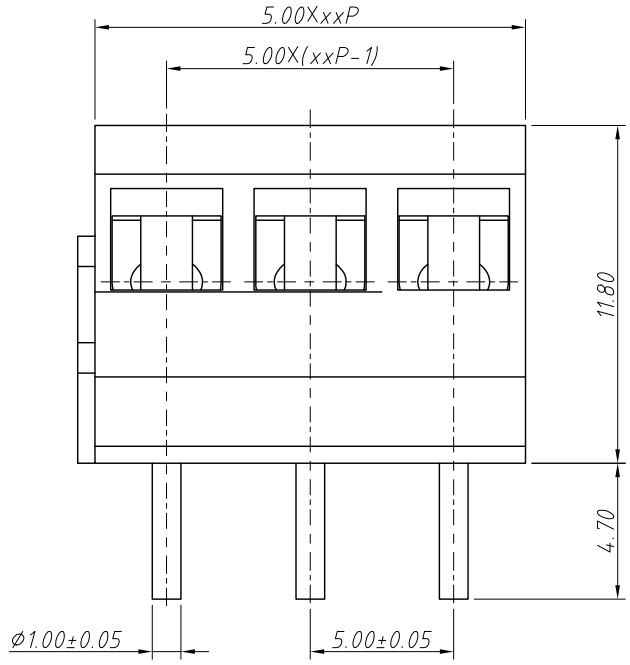

Order Information

L-KLS2-104-5.00-xxP-x x

- RoHS
- Terminal Block
- Pitch:5.00mm
- No.:Of xx Pin
- Color:
  - 1=Gray 2=Blue 3=Black
  - 4=Green 5=Orange 6=Red
  - 7=Transp 8=Yellow 9=White
- Screw:SC=Slot/Cross
  - S-Slot Screw C-Cross Screw

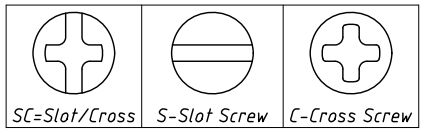

ANGLE TOLERANCE	PROJECTION		Description:	Pitch 5.00mm Terminal Block
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS2-104-5.00-xxP-xx
0~30 ±0.50	SHEET SIZE	A4		
30~60 ±0.75	Draw:	WuHao	2026-05-19	NingBo KLS ELECTRONIC CO.,LTD.
60~90 ±1.00	Check:	Daniel	2026-05-19	