


ANGLE TOLERANCE		PROJECTION		Description:		
±3°				AC Power Socket With C13 Type		
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-AS-401-2P	
x.x	±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.	
x.xx	±0.20	Draw:	Song			2025-07-15
x.xxx	±0.10	Check:	Daniel			2025-07-15

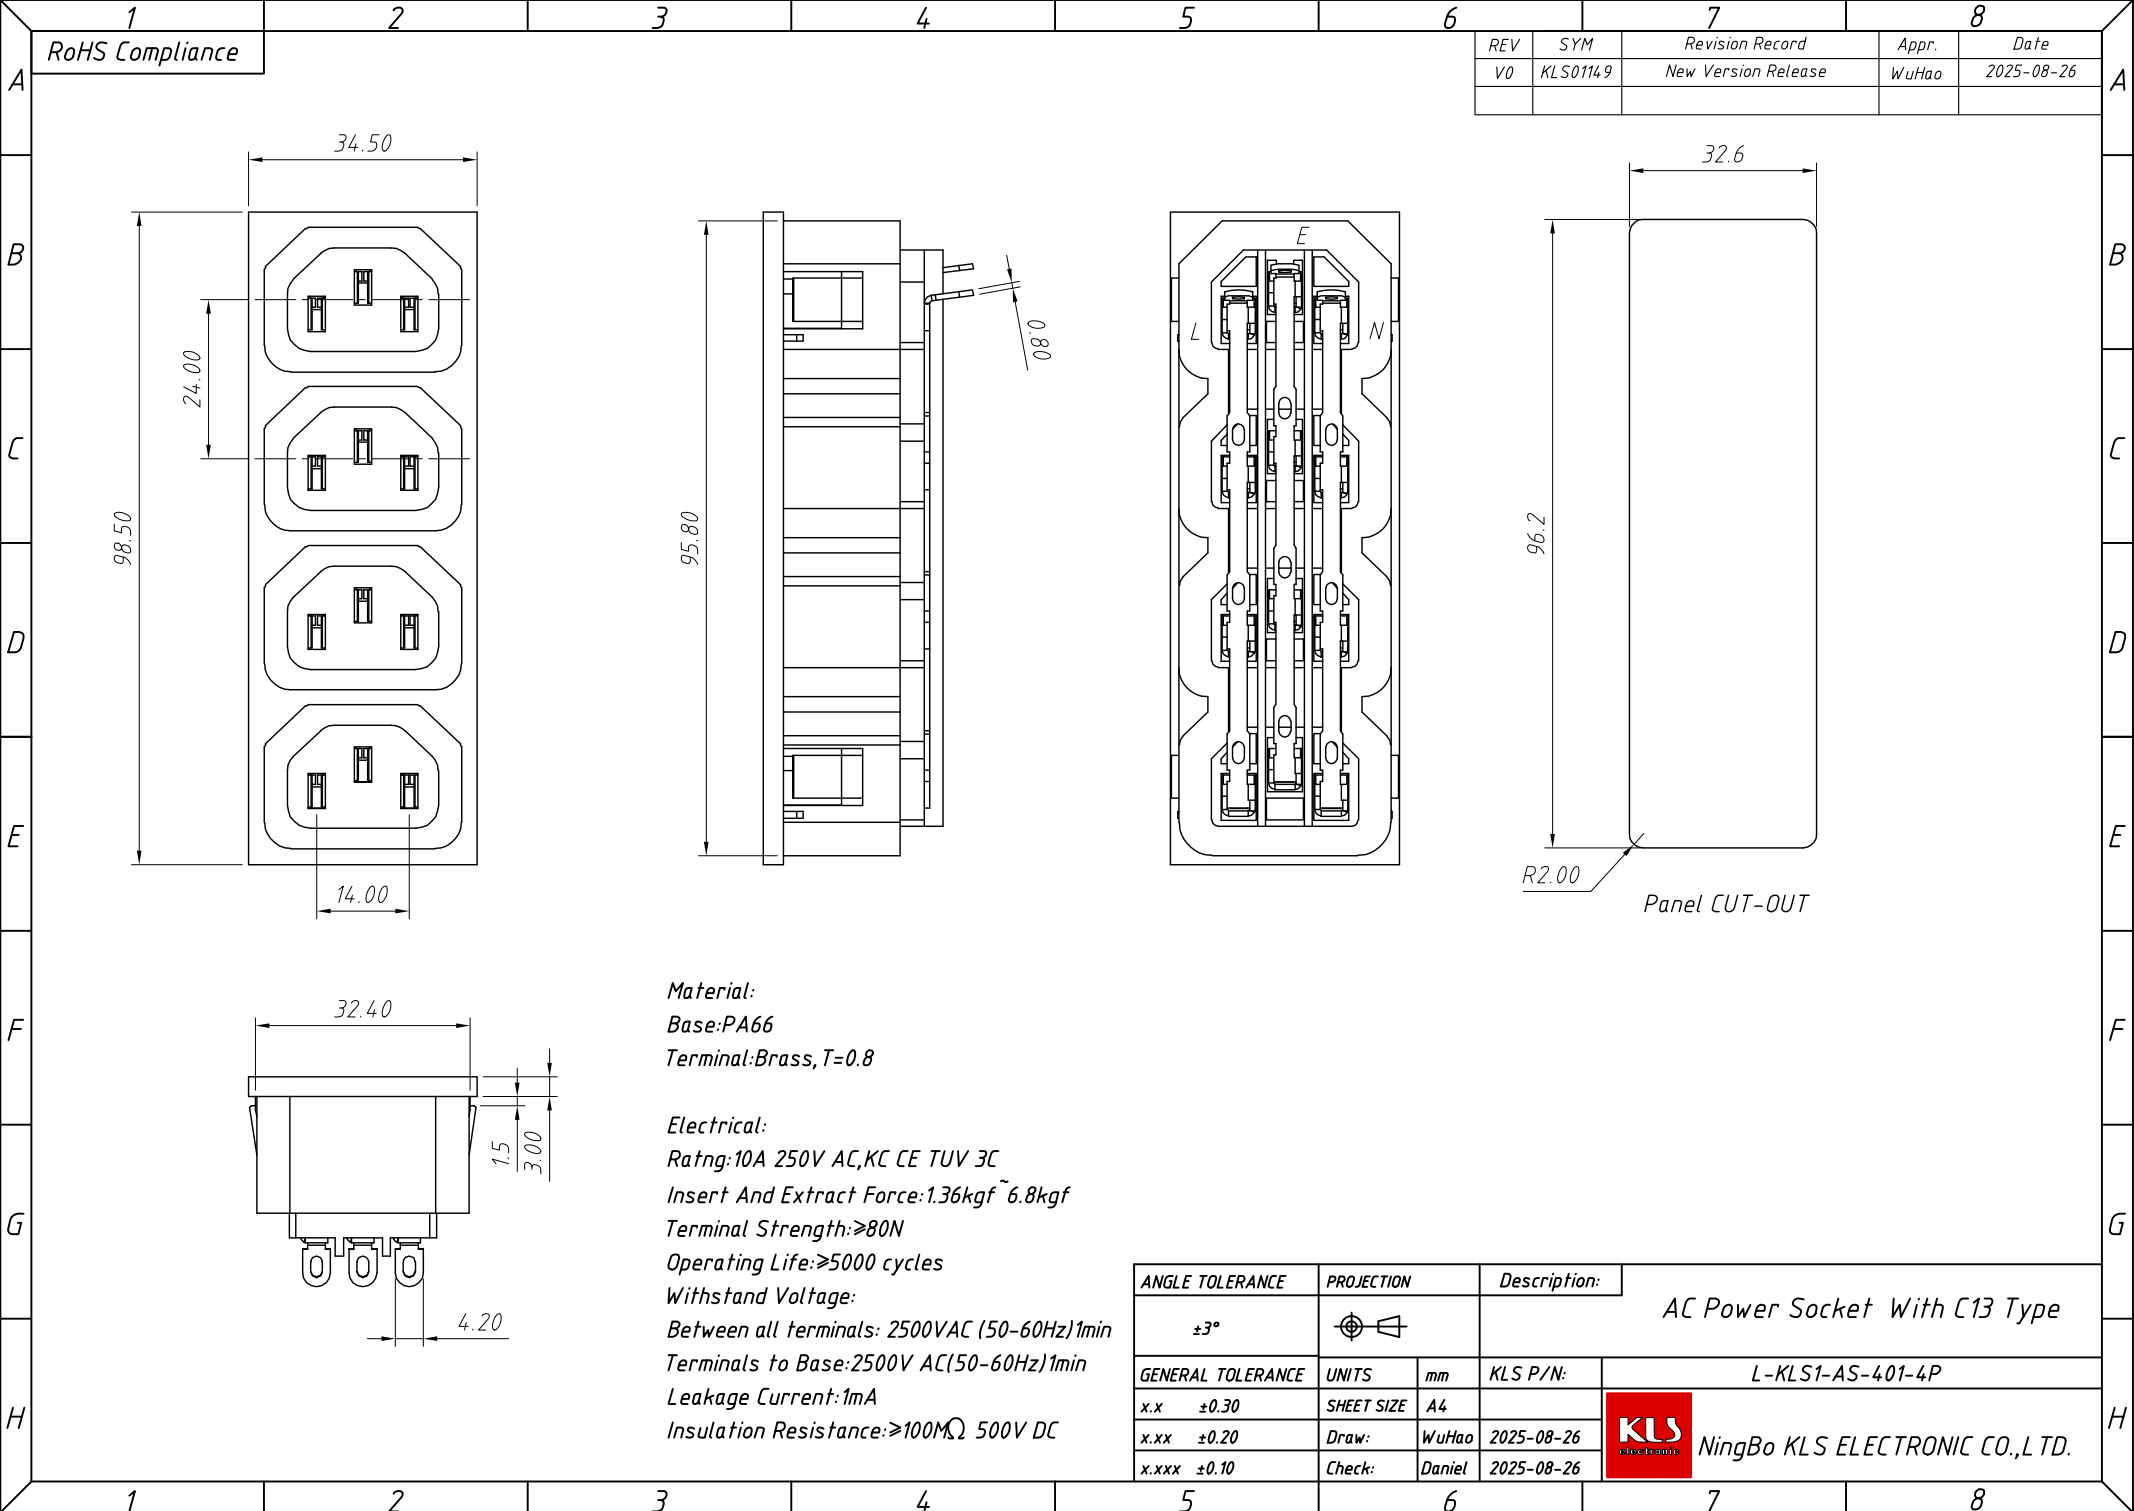

RoHS Compliance


REV	SYM	Revision Record	Appr.	Date
V0	KLS0114.9	New Version Release	WuHao	2025-08-26

Material:
Base:PA66
Terminal:Brass,T=0.8

Electrical:
Ratng:10A 250V AC,KC CE TUV 3C
Insert And Extract Force:1.36kgf~6.8kgf
Terminal Strength:≥80N
Operating Life:≥5000 cycles
Withstand Voltage:
Between all terminals: 2500VAC (50-60Hz)1min
Terminals to Base:2500V AC(50-60Hz)1min
Leakage Current:1mA
Insulation Resistance:≥100MΩ 500V DC

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				AC Power Socket With C13 Type	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x ±0.30		SHEET SIZE		A4	
x.xx ±0.20		Draw:		WuHao 2025-08-26	
x.xxx ±0.10		Check:		Daniel 2025-08-26	

NingBo KLS ELECTRONIC CO.,LTD.

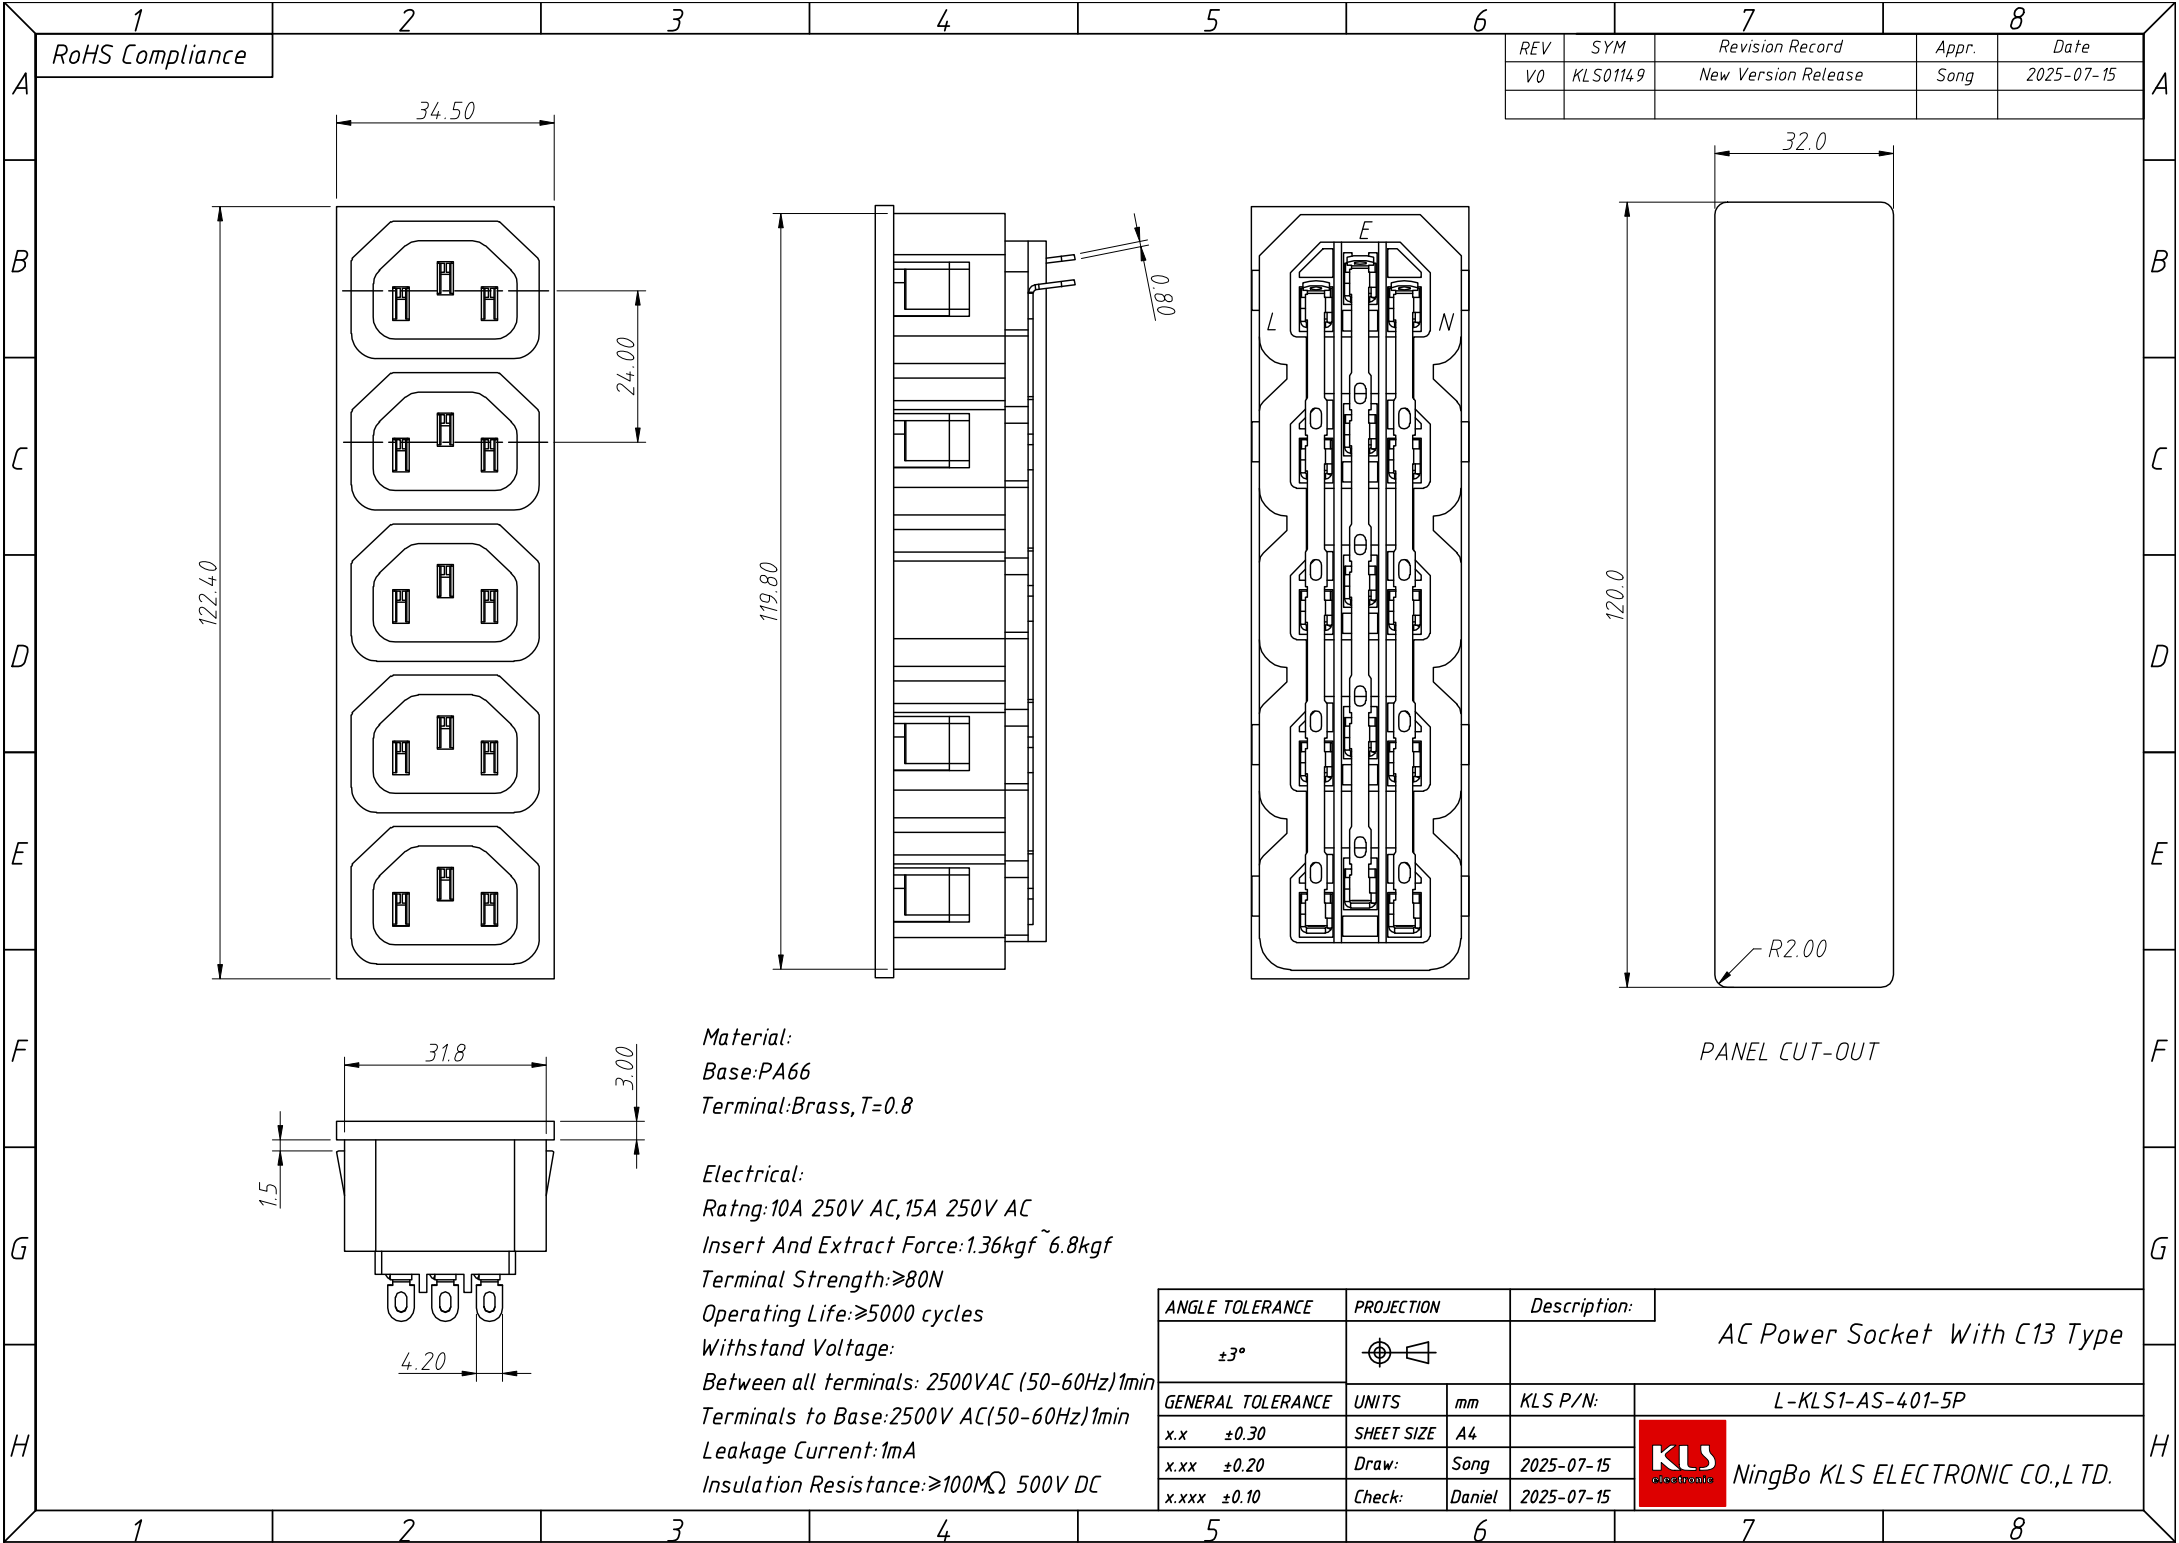

Material:
Base:PA66
Terminal:Brass,T=0.8

Electrical:
Ratng:10A 250V AC,15A 250V AC
Insert And Extract Force:1.36kgf~6.8kgf
Terminal Strength:≥80N
Operating Life:≥5000 cycles
Withstand Voltage:
Between all terminals: 2500VAC (50-60Hz)1min
Terminals to Base:2500V AC(50-60Hz)1min
Leakage Current:1mA
Insulation Resistance:≥100MΩ 500V DC

REV	SYM	Revision Record	Appr.	Date
V0	KLS01149	New Version Release	Song	2025-07-15

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				AC Power Socket With C13 Type	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-AS-401-5P
x.x	±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,LTD.
x.xx	±0.20	Draw:	Song		
x.xxx	±0.10	Check:	Daniel		