

KLS8-0616 MG Type Nylon Cable Glands


Material:Nylon PA6

Sealing:NBR, EPDM

Working temperature:-40℃ ~100℃ , (120℃,short time)

Characteristics:IP68(Rotate the part, and use O-ring)

Color: Black , light grey

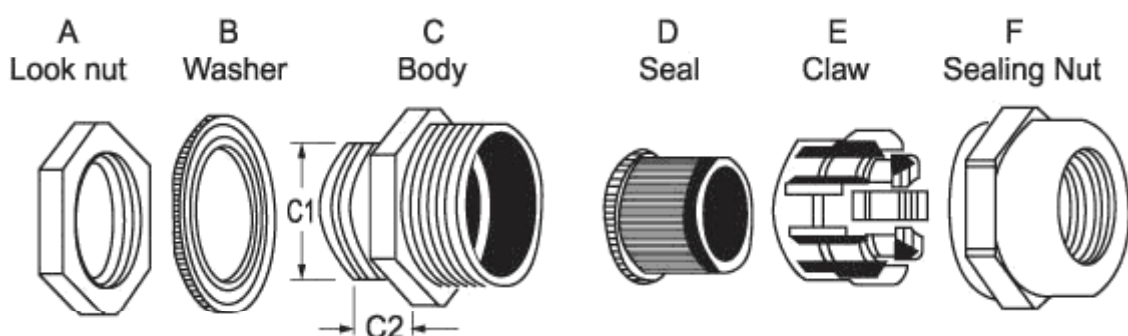

Item No.	Cable Range >IØI< (mm)	Outer diameter of thread (mm)	Mounting hole diameter (mm)	Thread length L(mm)	Joint length H(mm)	Wrench diameter (MM)
MG12	4.5~8	12	12~12.3	9		18
MG12S	3~5.3	12	12~12.3	9		18
MG16	6~10	16	16~16.3	15		22
MG16S	4~7	16	16~16.3	15		22
MG20	9~14	20	20~20.3	15		27
MG20S	6~11	20	20~20.3	15		27
MG25	13~18	25	25~25.3	15		33
MG25S	10~16	25	25~25.3	15		33
MG32	18~25	32	32~32.3	15		41
MG32S	15~22	32	32~32.3	15		41
MG40	24~30	40	40~40.3	20		50
MG40S	20~25	40	40~40.3	20		50
MG50	30~40	50	50~50.3	23		62
MG50S	26~32	50	50~50.3	23		62
MG63	40~50	63	63~63.3	24		75
MG63S	38~46	63	63~63.3	24		75


Oder Information

KLS8-0616-MG12-B

0616: MG Type Nylon Cable Glands

MG12: Item No.

B: Color Code: B-Black G-Gray

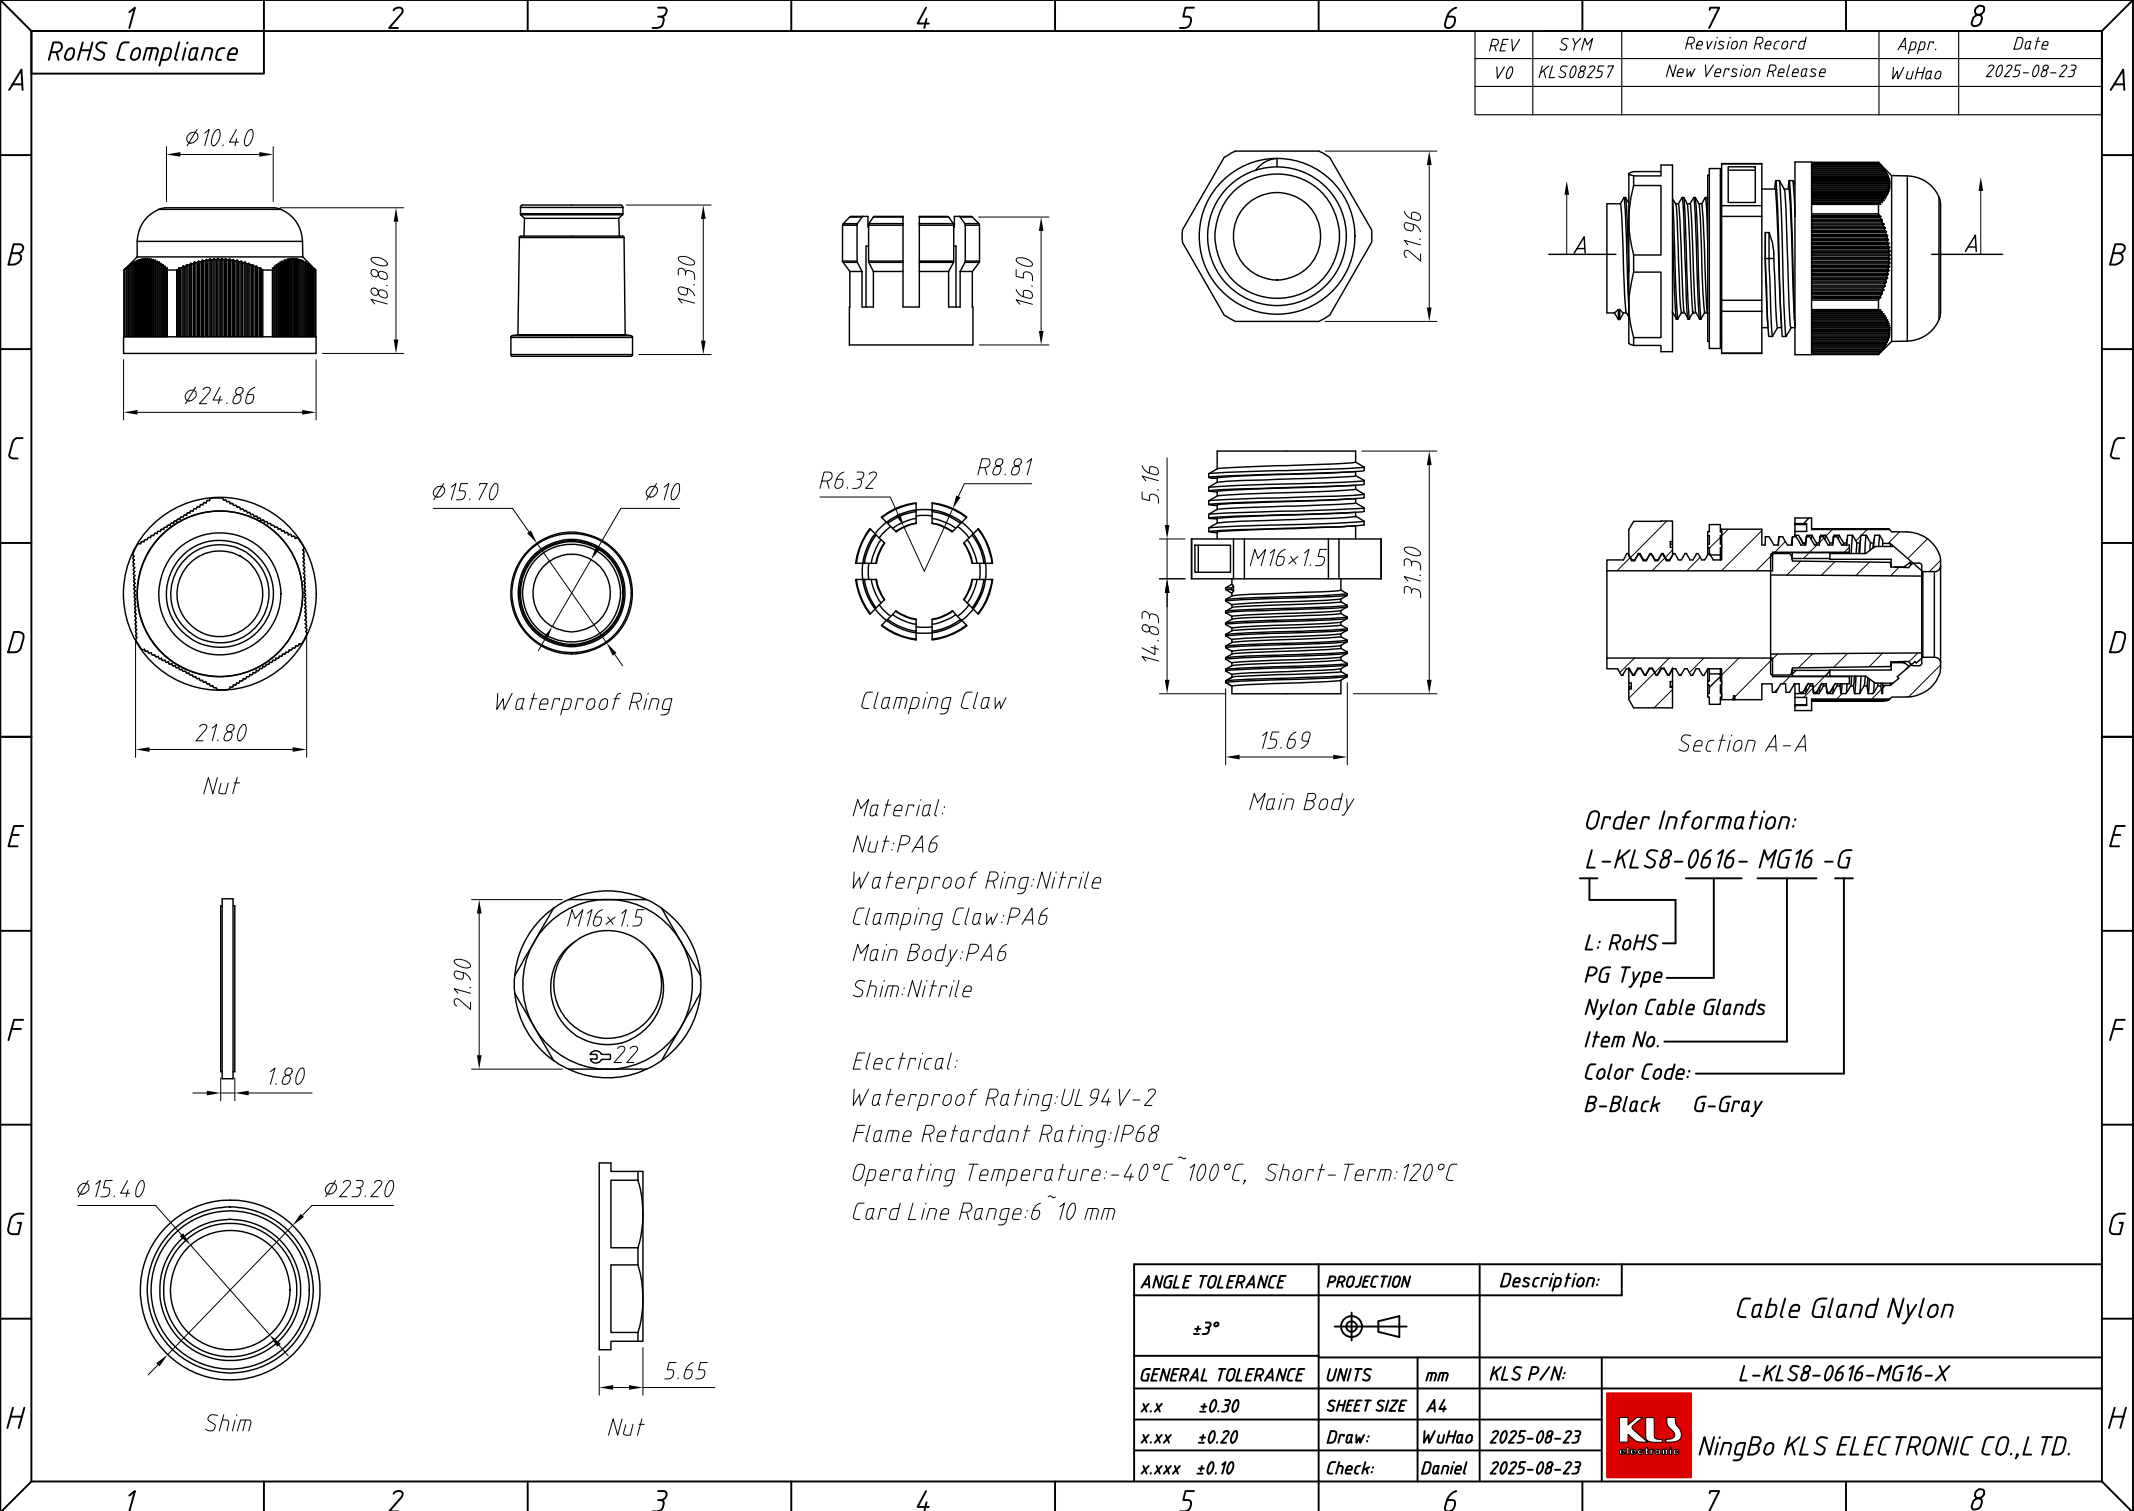

1		2		3		4		5		6		7		8	
RoHS Compliance												Revision Record		Appr.	
												New Version Release		WuHao	
														2025-08-23	

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				Cable Gland Nylon	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x		± 0.30	A4	L-KLS8-0616-MG16-X	
x.xx		± 0.20	Draw:	WuHao	2025-08-23
x.xxx		± 0.10	Check:	Daniel	2025-08-23



NingBo KLS ELECTRONIC CO.,L TD.