

Terminal Blocks

Wire Terminals


KLS8-02114 Heat Shrink Terminal

Material:

Outside layer:cross-linked vistanex
Inside:heat fusible caking agent
Connect tube:tinning purple copper
Color:Red,Blue,Yellow

Technical information:

Description:Protect insulated,waterproof
damp proof salt proof,rot proof.

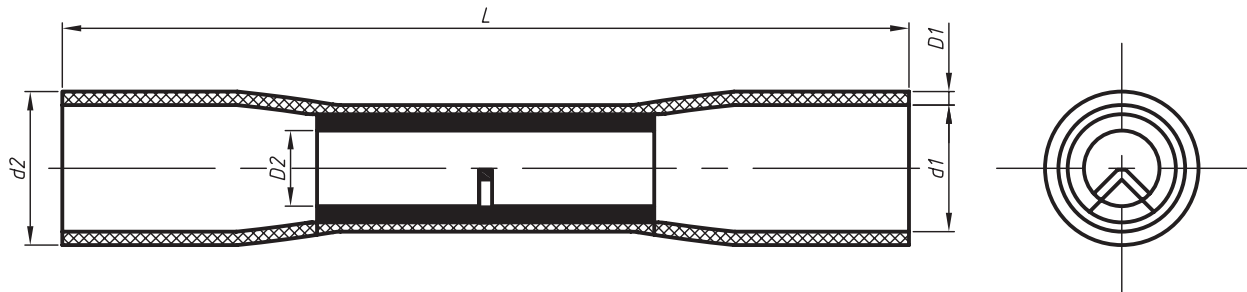


Remarks:


B Series jacket transparency vague, V Series jacket clear transparency.

Part No.	Sheath Color	Wire Range	Dimension(mm)				
			L	D1	D2	d1	d2
B1	Red	22-18 AGW	38	0.8	1.7	4.5	6.3
B2	Blue	16-14 AGW	38	0.9	2.46	5.0	7.9
B3	Yellow	12-10 AGW	42	1.0	3.60	6.4	8.6
V1	Red	22-18 AGW	38	0.8	1.7	4.6	6.3
V2	Blue	16-14 AGW	38	1.0	2.46	5.1	7.0
V3	Yellow	12-10 AGW	42	1.05	3.60	7.8	8.6

ORDER INFORMATION

Product NO.: KLS8-02114-B1-R



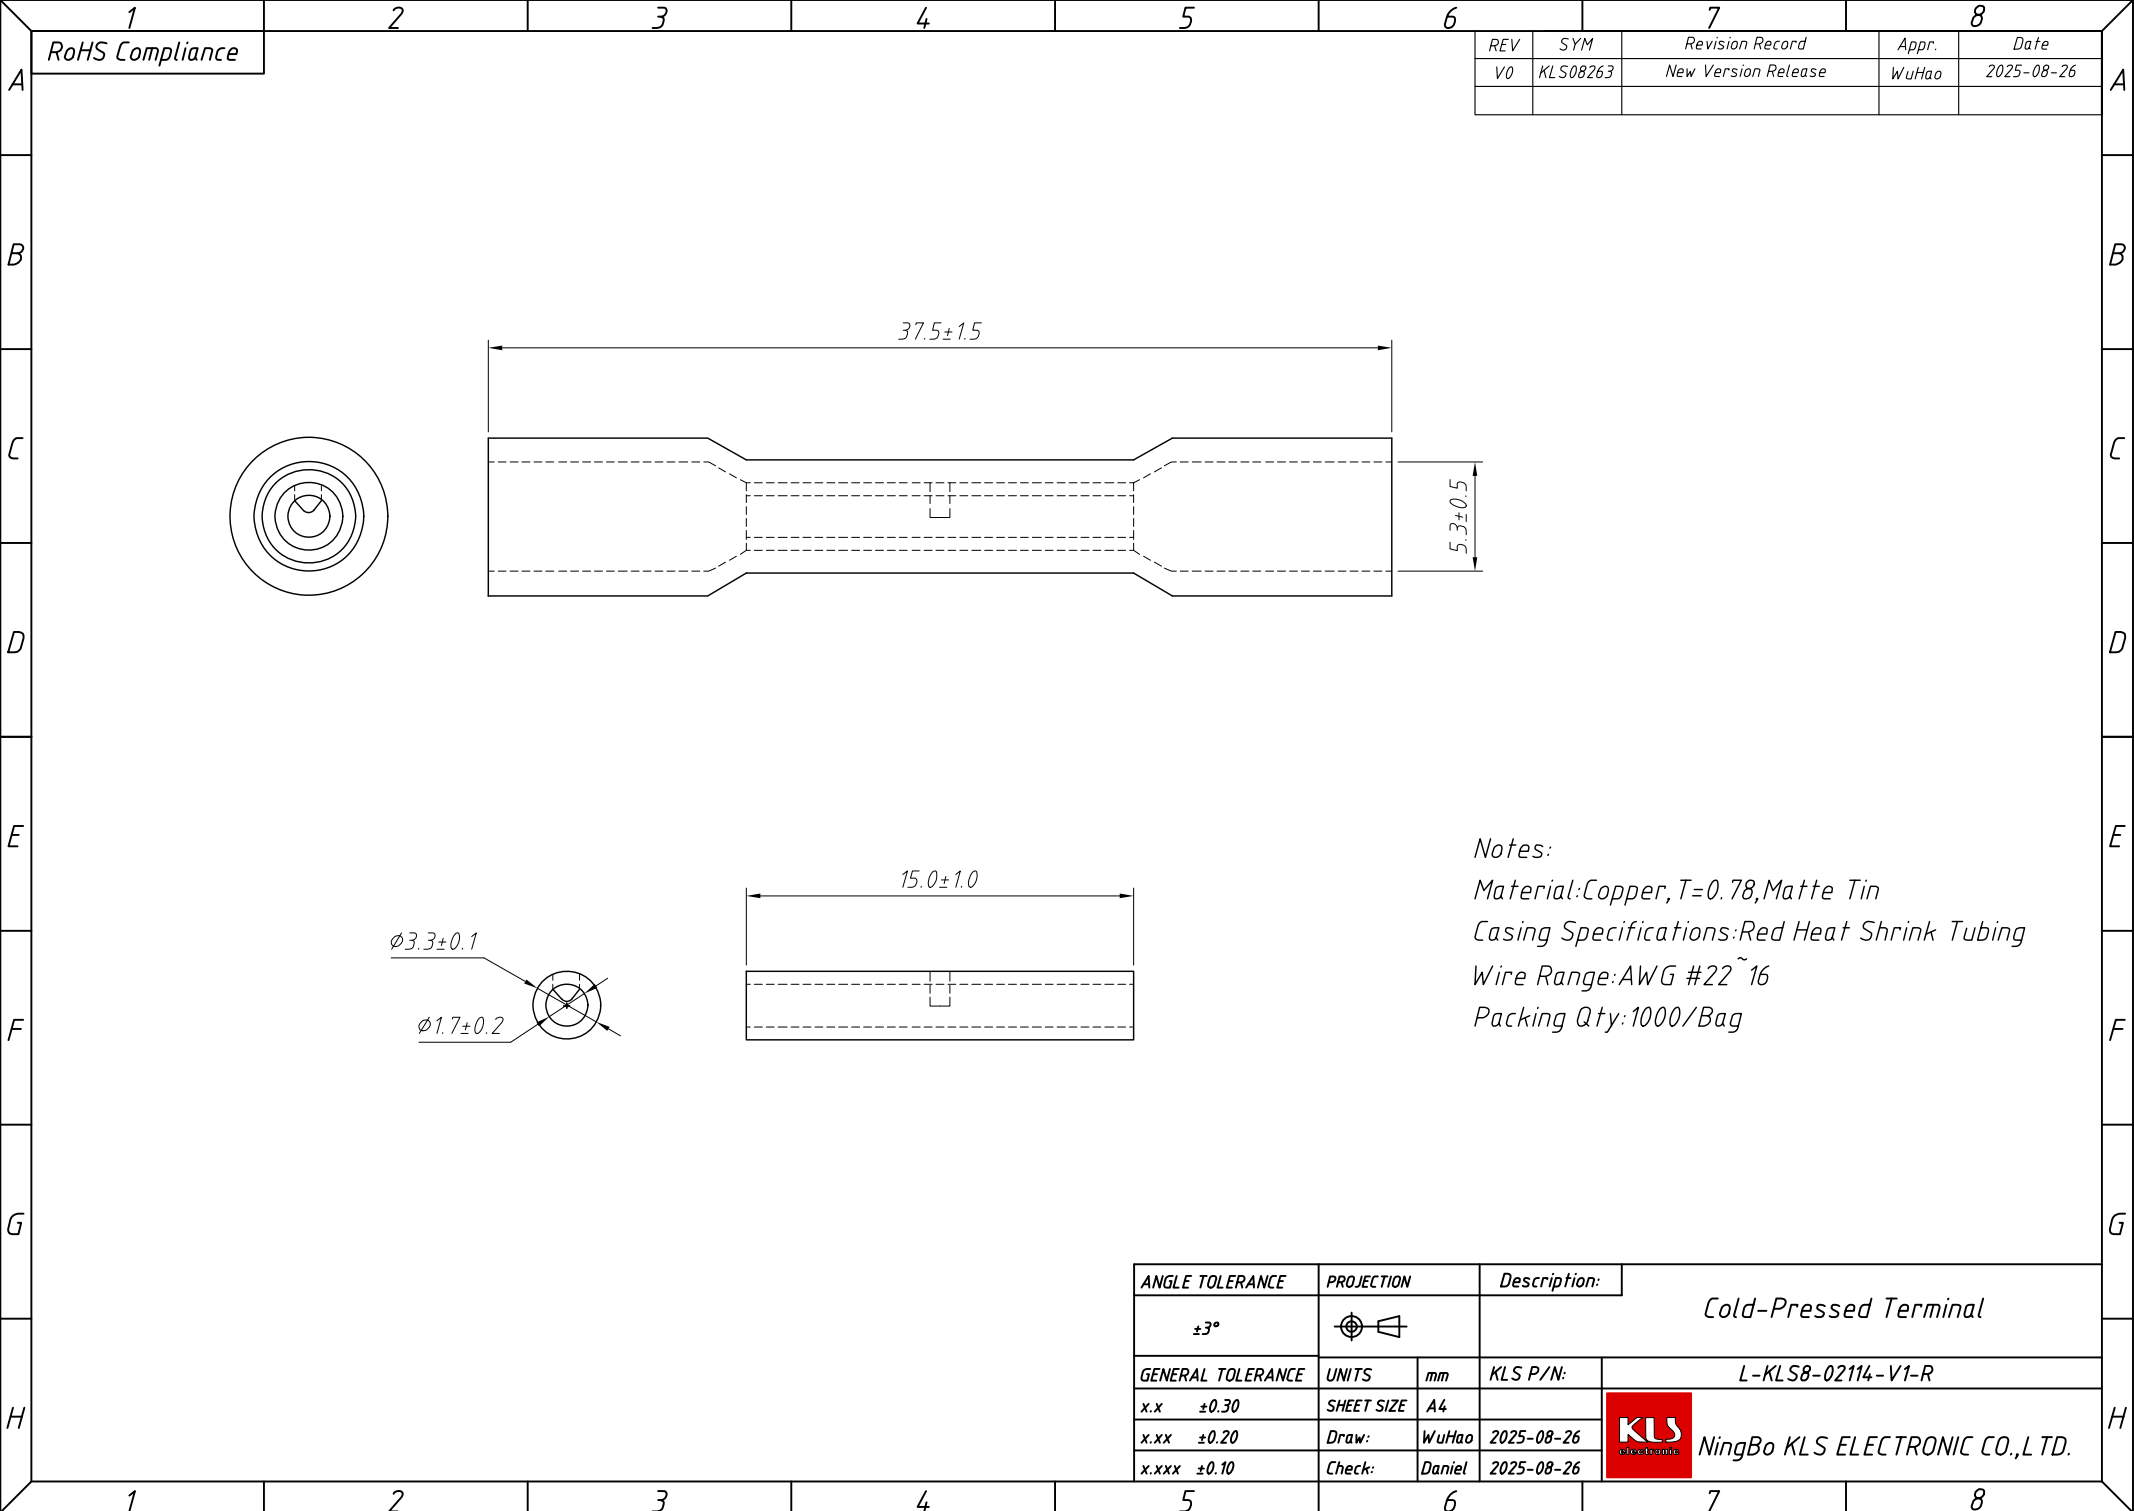

1
RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS08263	New Version Release	WuHao	2025-08-26

Notes:
Material:Copper,T=0.78,Matte Tin
Casing Specifications:Red Heat Shrink Tubing
Wire Range:AWG #22~16
Packing Qty:1000/Bag

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			Cold-Pressed Terminal	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS8-02114-V1-R
x.x ±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.20	Draw:	WuHao	2025-08-26	
x.xxx ±0.10	Check:	Daniel	2025-08-26	